

# Gas Fryers



Millivolt Control Tube Design: Models: 3, 4, & 5 tube, 30,000 BTU / burner  
 Millivolt (snap action) thermostat, 200°F - 400°F  
 Stainless steel front and door  
 Sides and back are galvanized steel  
 Large cold zone to trap food particles  
 1-1/4" dia. full port drain valve for fast and complete oil draining  
 2" diameter adjustable Stainless Steel legs standard, casters optional  
 Tank is fully peened for smoother welds & easy cleaning  
 Drain pipe holder attached to inside door  
 Twin nickel plated baskets



TR-F4-SPTK

Solid-State Controls Tube Design: 4 & 5 tube models, 30,000 BTU / burner  
 Solid State Control thermostat, 200°F - 375°F  
 Melt Cycle switch that allows the shortening to heat slowly when in the "on" position  
 Indicator lights: "ON/OFF" & "Melt Cycle"  
 DVI- Drain Valve Interlock control prevents "dry firing"  
 All stainless steel cabinet  
 Large cold zone to trap food particles  
 1-1/4" dia. full port drain valve for fast and complete oil draining  
 2" diameter adjustable Stainless Steel legs standard, casters optional  
 Tank is fully peened for smoother welds & easy cleaning  
 Fryer Cleaning Kit standard with solid state control fryers  
 Drain pipe holder attached to inside door  
 Twin nickel plated baskets



TR-F3-NG  
TR-F3-LP



TR-F4-NG  
TR-F4-LP




TR-F5-NG  
TR-F5-LP




TR-F4S-NG



TR-F5S-NG



TR-F3-NG/TR-F3-LP  
 TR-F4-NG/TR-F4-LP/TR-F4S-NG  
 TR-F5-NG/TR-F5-LP/TR-F5S-NG

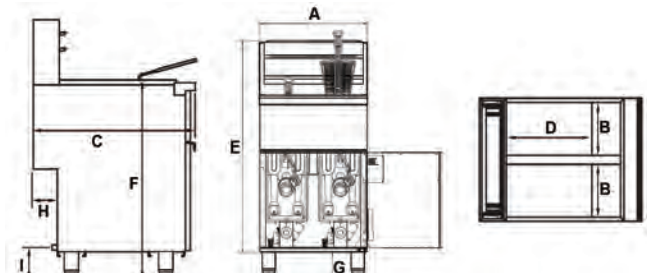

TR-F4-SPTK

Model	Heat Tubes	Gas Type	Oil Capacity	Total BTU	Width A	Width B	Depth C	Depth D	Height E	Height F	Clearance G	Clearance H	Clearance I	Net Weight(lbs)	Shipping Dimensions	Ship Weight(lbs)
TR-F3-NG	3	Natural Gas	35-40 lbs.	90,000	15.5	14	30.8	14	39.4	34.7	6	4.2	7	120	33.1x18.5x33.5	150
TR-F3-LP	3	Liquid Propane	35-40 lbs.	90,000	15.5	14	30.8	14	39.4	34.7	6	4.2	7	120	33.1x18.5x33.5	150
TR-F4-NG	4	Natural Gas	40-55 lbs.	120,000	15.5	14	30.8	14	39.4	34.7	6	4.2	7	132	33.1x18.5x33.5	162
TR-F4-LP	4	Liquid Propane	40-55 lbs.	120,000	15.5	14	30.8	14	39.4	34.7	6	4.2	7	132	33.1x18.5x33.5	162
TR-F5-NG	5	Natural Gas	75-80 lbs.	150,000	21	18	34.3	18	39.4	34.7	6	4.2	7	168	37.4x24.4x33.5	209
TR-F5-LP	5	Liquid Propane	75-80 lbs.	150,000	21	18	34.3	18	39.4	34.7	6	4.2	7	168	37.4x24.4x33.5	209
TR-F4-SPTK	4	Natural Gas	72-78 lbs.	120,000	21	9	34.3	18	39.4	34.7	6	4.2	7	192	37.4x24.4x33.5	209
TR-F4S-NG	4	Natural Gas	40-55 lbs.	120,000	15.5	14	30.8	14	39.4	34.7	6	4.2	7	132	33.1x18.5x33.5	162
TR-F5S-NG	5	Natural Gas	75-80 lbs.	150,000	21	18	34.3	18	39.4	34.7	6	4.2	7	168	37.4x24.4x33.5	209

## GAS REQUIREMENTS:

3/4" NPT gas connection

Natural Gas or Liquid Propane(LP) Gas main supply required

All units ship ready for Natural Gas. An LP conversion kit is included for converting to LP Gas

In order to avoid any warranty issues, conversion of your unit from Natural Gas to must be completed by an authorized service agent

