H5X Element SST

Height: 28.5" Width: 7.4" Depth: 18.9" (72.4cm) (18.8cm) (48.0cm)



- LED display provides simple temperature adjustment
- Thinsulate® tank insulation provides increased energy efficiency
- Programmable "Energy Saver Mode" reduces operating cost during idle periods
- The perfect tool for added control over quality coffee and tea
- Contemporary, space-saving design
- Digital thermostat provides constant and accurate temperatures of 60°- 212°F (15.6°-100°C)

Agency:





Specifications

Product #: 43600.0026 Dispense: Pull & Hold
Finish: Stainless Water Access: Plumbed

Faucet: Upper

Temp. Setting: 212°F (100.000°C)

Electrical & Capacity

120	15.4	1850	No	-	-	60°F (15.5°C)	1	2	60
Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	-


CAD Drawings


Additional Features


2D	Revit	KLC
•		







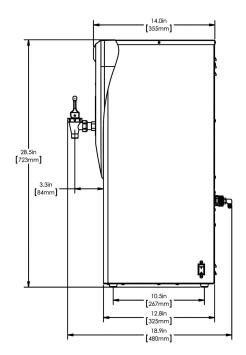



Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	28.5 in.	7.4 in.	18.9 in.	32.9 in.	11.0 in.	20.7 in.	32.500 lbs	4.338 ft ³
Metric	72.4 cm	18.8 cm	48.0 cm	83.7 cm	27.9 cm	52.5 cm	14.742 kgs	0.123 m³



Related Products & Accessories: H5X Element SST(43600.0026)











Serving & Holding Options: H5X Element SST(43600.0026)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

