

Reach-in Freezer


Glass Door



- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-Closing Door
- Magnetic gasket can be replaced without any tools External: S/S 430
- Internal: S/S 304 & coated aluminum
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- LED interior lighting to enhance product display
- Heating element concealed in door frame to eliminate condensation
- Adjustable, heavy-duty epoxy coated wire shelves
- Clip-on shelf tag holders
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Temperature: 0°F to -10°F / -17°C to -23°C
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord




C-27FG

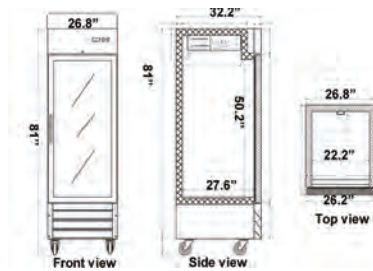

C-27FG



C-54FG

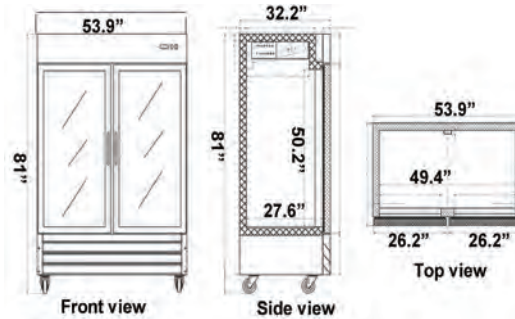

C-54FG

SPECIFICATIONS

Freezer

Model	Door	Ext. Dimensions W x D x H (in)	Int.. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	HP	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-27FG	1	26.8 X 32.2 X 81	22.2 X 27.6X 50.2	4	115/60/1	8A	1/2	23	5-15P	329	29.9x34.1x84.6
C-54FG	2	53.9 X 32.2X 81	49.4 X 27.6X 50.2	8	115/60/1	9A	1	49	5-15P	568	55.3x34.1x84.6



Certified To ANSI/NSF 7 Standards
If the data and structure update, without notice, subject to material object

