


Reach-ins Refrigerators

Glass Door




- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-Closing Door
- Magnetic gasket can be replaced without any tools
- External: S/S 430
- Internal: S/S 304 & coated aluminum
- Energy efficient Low-e triple pane glass doors
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- LED interior lighting to enhance product display
- Adjustable, heavy-duty epoxy coated wire shelves
- Clip-on shelf tag holders
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Temperature: 33 to 40°F / 1 to 4°C
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord

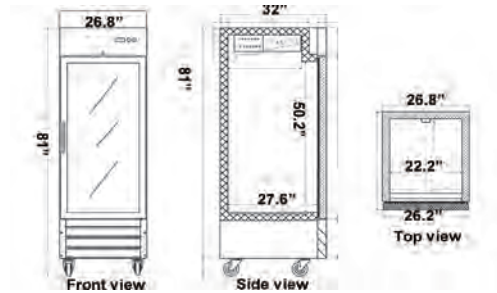

C-27RG



C-54RG

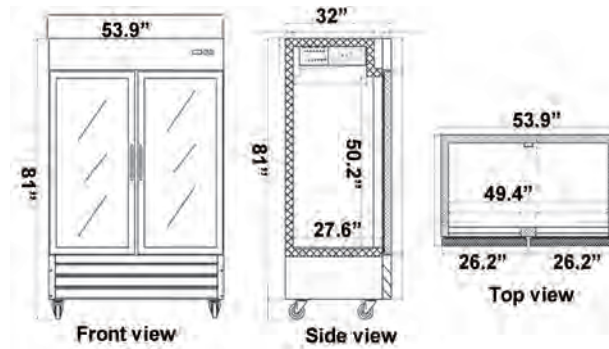

SPECIFICATIONS

Refrigerator

Model	Door	Ext. Dimensions W x D x H (in)	Int.. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	HP	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-27RG	1	26.8 X 32 X 81	22.2 X 27.6X 50.2	4	115/60/1	3A	1/5	23	5-15P	366	29.9x34.1x84.6
C-54RG	2	53.9 X 32X 81	49.4 X 27.6X 50.2	8	115/60/1	4.5A	1/4	49	5-15P	598	55.3x34.1x84.6



Certified To ANSI/NSF 7 Standards
If the data and structure update, without notice, subject to material object

