

Reach-in Refrigerators


Stainless Steel Door




CFC free refrigerant and foam insulation
 Electronic thermostat and digital LED temperature display for accurate control and easy reading
 Magnetic gasket can be replaced without any tools
 External: S/S 430
 Internal: S/S 304 & coated aluminum
 3 adjustable, heavy-duty epoxy coated wire shelves per door
 Auto defrosting and auto evaporation to prevent condensation
 Condensation pan efficiently evaporates excess water
 Easy to mount 4" casters (front casters with brakes) are standard with all units
 Temperature: 33°F to 40°F / 1°C to 4°C
 Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord



C-19BR
C-27BR




C-19BR

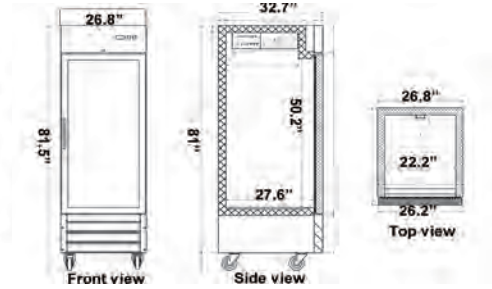


C-27BR



C-35BR
C-54BR




C-35BR

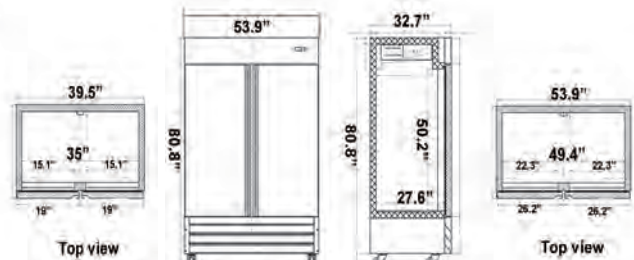

C-54BR



C-81BR

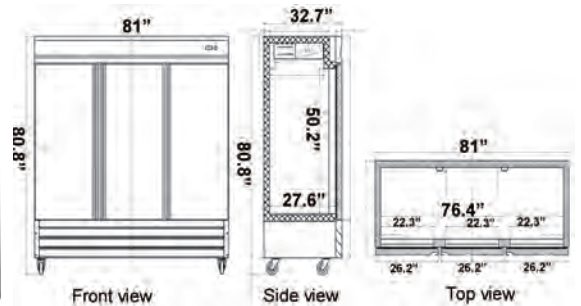

C-81BR

SPECIFICATIONS

Refrigerator

Model	Door	Ext. Dimensions W x D x H (in)	Int.. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	HP	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-19BR	1	26.8 X 25.6 X 81.5	22.2 X 20.6 X 50.2	4	115/60/1	3A	3/8	18	5-15P	291	29.9x27x84.6
C-27BR	1	26.8 X 32.7 X 81.5	22.2 X 27.6X 50.2	4	115/60/1	3A	3/8	23	5-15P	329	29.9x34.1x84.6
C-35BR	2	39.5 X 32.7 X 80.8	35 X 27.6 X 50.2	8	115/60/1	4.5A	1/2	33	5-15P	413	40.9x34.3x84.6
C-54BR	2	53.9 X 32.7X 80.8	49.4 X 27.6X 50.2	8	115/60/1	4.5A	1/2	49	5-15P	490	55.3x34.1x84.6
C-81BR	3	81 X 32.7X 80.8	76.4 X 27.6X 50.2	12	115/60/1	7.5A	3/4	72	5-15P	669	83.7x34.1x85



Certified To ANSI/NSF 7 Standards
 If the data and structure update, without notice, subject to material object

