


# Stainless Steel Solid Door Reach-In Refrigerator With Drawer



www.sub-equip.com

## Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

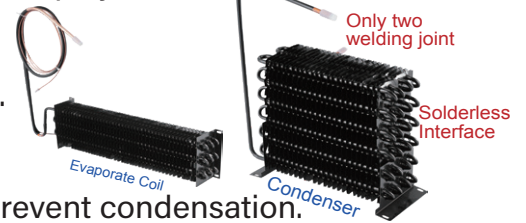

## Temperature

- Interior temperature range: 1°C to 6°C ( 33°F to 46°F)
- Ambient temperature upto 45°C ( 113°F)



C-27BR-1D



C-27BR-2D



C-35BR-2D



C-35BR-2UD



C-35BR-4D

C-48BR-2D/C-54BR-2D

C-48BR-2UD/C-54BR-2UD

C-48BR-4D/C-54BR-4D

## Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Shelves	Capacity(cu./ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-27BR-1D	1 & 1	26 3/4 x 32 1/4 x 80 7/8	4	21.5	115/60/1	7	700W/0.94HP	5-15P	309	29 1/4 x 35 x 88 3/4
C-27BR-2D	1 & 2	26 3/4 x 32 1/4 x 80 7/8	3	21.5	115/60/1	7	700W/0.94HP	5-15P	309	29 1/4 x 35 x 88 3/4
C-35BR-2D	2&2	39 1/2 x 32 1/4 x 80 7/8	8	32.7	115/60/1	7.5	800W/1.08HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-35BR-2UD	2&2	39 1/2 x 32 1/4 x 80 7/8	8	32.7	115/60/1	7.5	800W/1.08HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-35BR-4D	2&4	39 1/2 x 32 1/4 x 80 7/8	6	32.7	115/60/1	7.5	800W/1.08HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-48BR-2D	2&2	48 x 32 1/4 x 80 7/8	8	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-48BR-2UD	2&2	48 x 32 1/4 x 80 7/8	8	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-48BR-4D	2&4	48 x 32 1/4 x 80 7/8	6	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-54BR-2D	2&2	54 x 32 1/4 x 80 7/8	8	45.2	115/60/1	7.5	800W/1.08HP	5-15P	530	56 3/8 x 35 x 88 3/4
C-54BR-2UD	2&2	54 x 32 1/4 x 80 7/8	8	45.2	115/60/1	7.5	800W/1.08HP	5-15P	530	56 3/8 x 35 x 88 3/4
C-54BR-4D	2&4	54 x 32 1/4 x 80 7/8	6	45.2	115/60/1	7.5	800W/1.08HP	5-15P	574	56 3/8 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.

# Stainless Steel Solid Door Reach-In Refrigerator With Drawer



www.sub-equip.com

## Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.



## Temperature

- Interior temperature range: 1°C to 6°C ( 33°F to 46°F)
- Ambient temperature upto 45°C ( 113°F)



C-81BR-2D



C-81BR-3D



C-81BR-4D



C-81BR-6D


## Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Shelves	Storage Capacity(cu./ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-81BR-2	3 & 2	80 3/4 x 32 1/4 x 80 7/8	13	68.5	115/60/1	15	1600W/2.15HP	5-15P	740	83 x 35 x 88 3/4
C-81BR-3	3 & 3	80 3/4 x 32 1/4 x 80 7/8	12	68.5	115/60/1	15	1600W/2.15HP	5-15P	760	83 x 35 x 88 3/4
C-81BR-4	3 & 4	80 3/4 x 32 1/4 x 80 7/8	11	68.5	115/60/1	15	1600W/2.15HP	5-15P	780	83 x 35 x 88 3/4
C-81BR-6	3 & 6	80 3/4 x 32 1/4 x 80 7/8	9	68.5	115/60/1	15	1600W/2.15HP	5-15P	820	83 x 35 x 88 3/4





If the data and structure update, without notice, subject to material object.



# Stainless Steel Solid Door Reach-In Freezer With Drawer

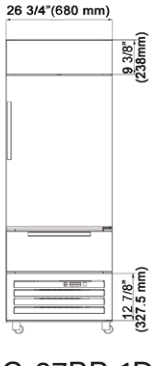



C-27BR-1D

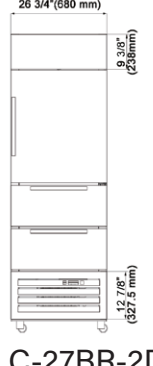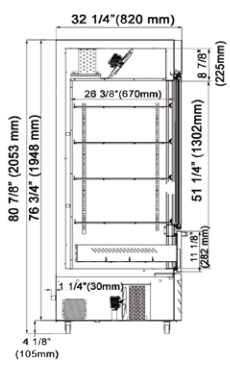



C-27BR-2D

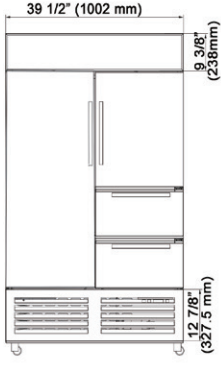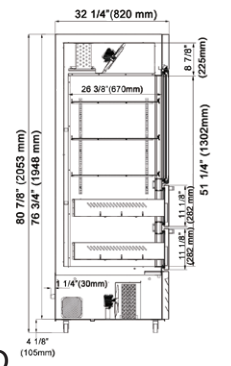



C-35BR-2D

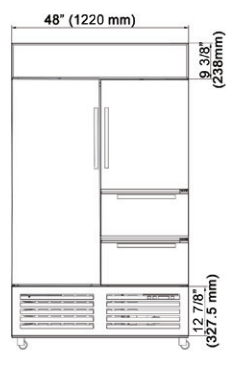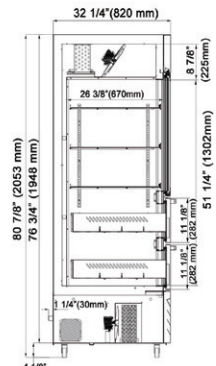



C-48BR-2D

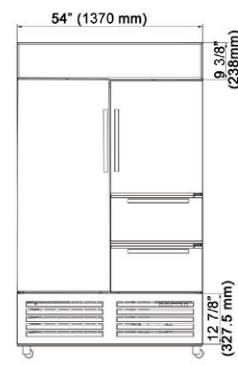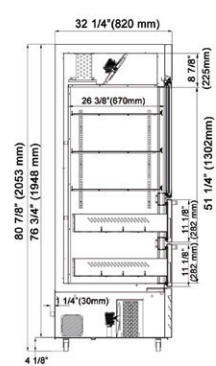



C-54BR-2D

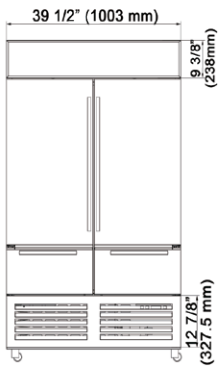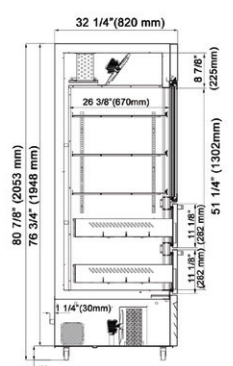



C-35BR-2UD

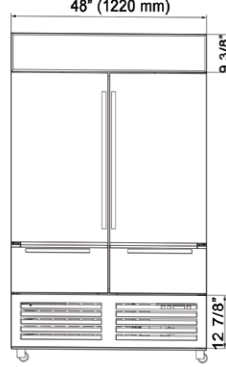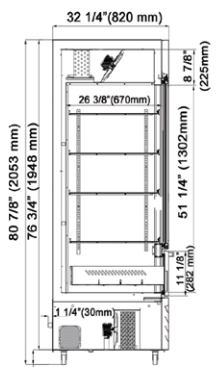



C-48BR-2UD

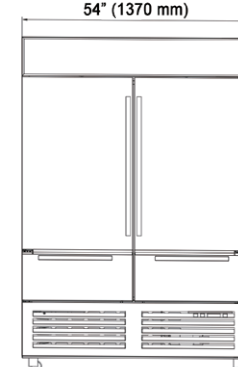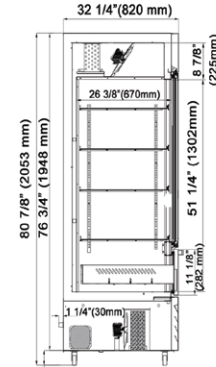



C-54BR-2UD

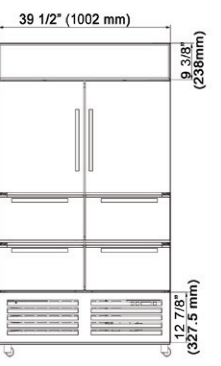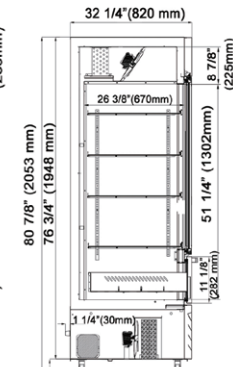


C-35BR-4D

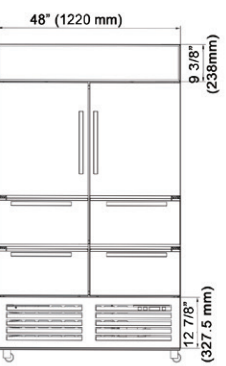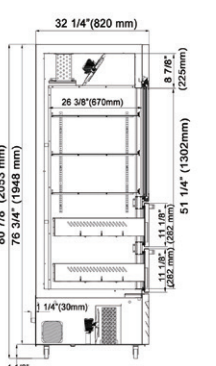


C-48BR-4D

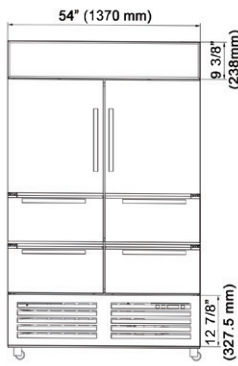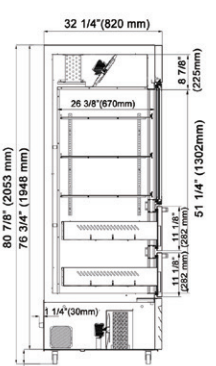



C-54BR-4D

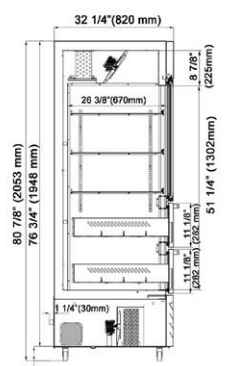



# Stainless Steel Solid Door Reach-In Freezer With Drawer

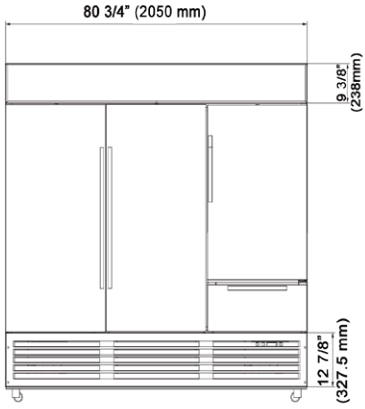


C-81BR-1D

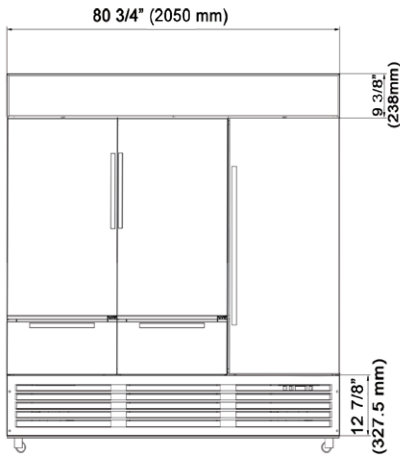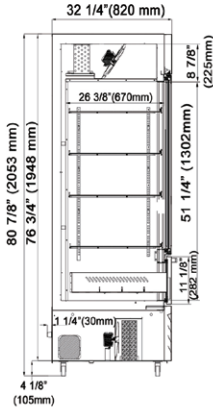



C-81BR-2D

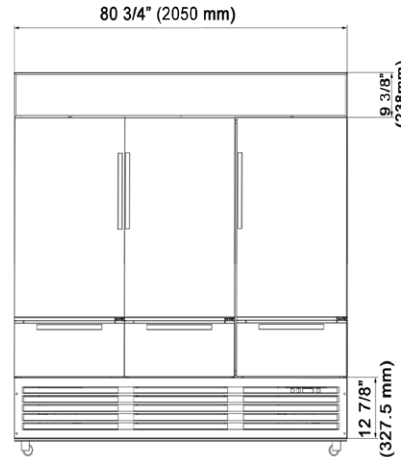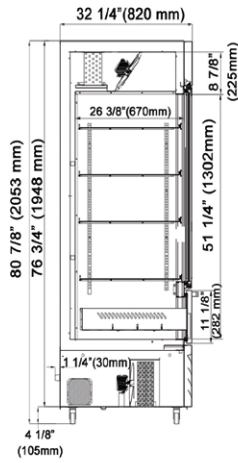

C-81BR-3D

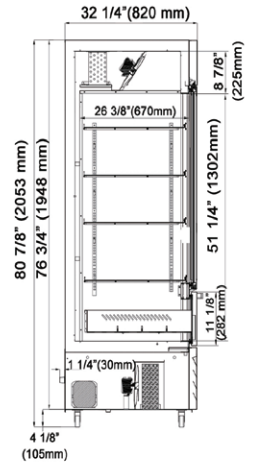

C-81BR-4D

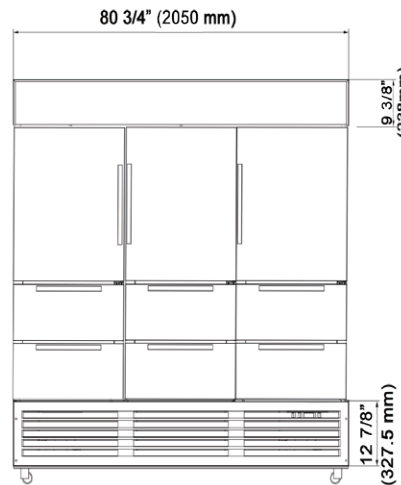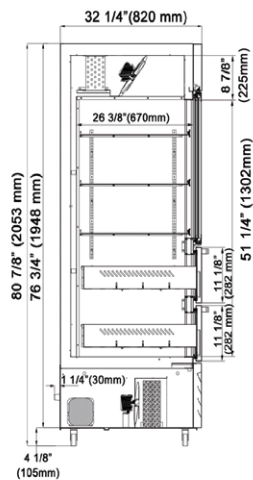

C-81BR-6D

