


Salad & Sandwich Prep Table

Regular Top Refrigerator With Drawer



Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-Closing Swing Door
- Magnetic gasket can be replaced without any tools
- External: Stainless Steel framework construction
- Internal: 304 Stainless Steel
- Auto defrosting and auto evaporation to prevent condensation
- The coated copper tube, with a robust 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, it has only two welding joints, reducing the risk of leaks
- Condensor sits inside the condensation pan efficiently evaporates excess water
- Adjustable, heavy-duty epoxy coated wire shelves
- 1/6 size Polycarbonate GN pan and plastic cutting board included
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord

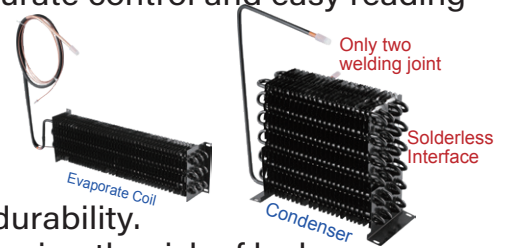

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Warranty

- 3 years parts and labour
- 5 years compressor warranty



CSSU-36-2D
CSSU-48-2D
CSSU-60-2D

CSSU-36-4D
CSSU-48-4D
CSSU-60-4D



CSSU-29-2D



CSSU-72-2D



CSSU-72-4D



CSSU-72-6D

Specifications

Model	Doors & Drawers	1/6 Size Pans	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CSSU-29-2D	0&2	8	29 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	3	250W/0.34HP	7.5	5-15	255	32 1/8 x 33 1/3 x 45 7/8
CSSU-36-2D	1 & 2	10	36 1/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	3	300W/0.40HP	11	5-15	274	39 2/5 x 33 1/3 x 45 7/8
CSSU-36-4D	0&4	10	36 1/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	3	300W/0.40HP	11	5-15	307	39 2/5 x 33 1/3 x 45 7/8
CSSU-48-2D	1 & 2	12	48 1/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4	380W/0.51HP	12.5	5-15	319	51 1/2 x 33 1/3 x 45 7/8
CSSU-48-4D	0&4	12	48 1/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4	380W/0.51HP	12.5	5-15	351	51 1/2 x 33 1/3 x 45 7/8
CSSU-60-2D	1 & 2	16	61 1/8 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	16	5-15	425	64 2/5 x 33 1/3 x 45 7/8
CSSU-60-4D	0&4	16	61 1/8 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	16	5-15	457	64 2/5 x 33 1/3 x 45 7/8
CSSU-72-2D	2&2	20	71 3/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	19	5-15	504	75 x 33 1/3 x 45 7/8
CSSU-72-4D	1 & 4	20	71 3/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	19	5-15	536	75 x 33 1/3 x 45 7/8
CSSU-72-6D	0&6	20	71 3/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	19	5-15	572	75 x 33 1/3 x 45 7/8



WARRANTY If the data and structure update, without notice, subject to material object.