


Under Counter Refrigerator With Drawer



Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.



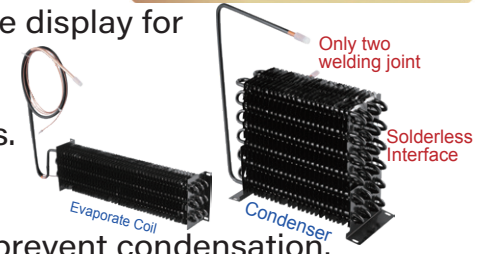


Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Ambient temperature upto 45°C (113°F)

Warranty

- 3 years parts and labour
- 5 years compressor warranty

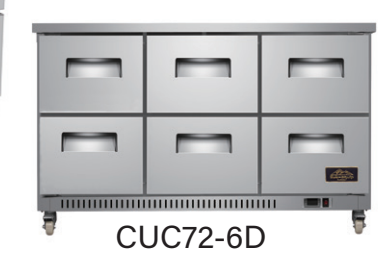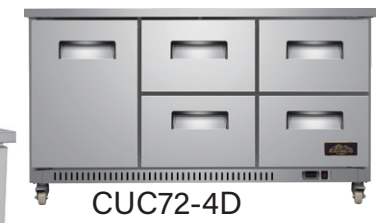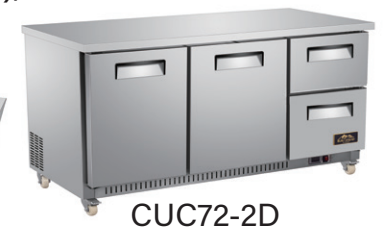

Specifications

| Model | Doors & Drawers | Ext. Dimensions W x D x H (in) | Storage Capacity(cu-ft) | V/Hz/Ph | AMPS | Power | NEMA PLUG | Ship Weight(lbs) | Ship Data W x D x H (in) |
|----------|-----------------|--------------------------------|-------------------------|----------|------|-------------|-----------|------------------|--------------------------|
| CUC27-2D | 0&2 | 27 3/4 x 29 7/8 x 35 5/8 | 6.5 | 115/60/1 | 3 | 250W/0.34HP | 5-15P | 219 | 33 3/8 x 32 1/8 x 39 |
| CUC36-2D | 1 & 2 | 36 1/4 x 29 7/8 x 35 5/8 | 9 | 115/60/1 | 3 | 300W/0.41HP | 5-15P | 243 | 39 1/2 x 33 3/8 x 39 |
| CUC36-4D | 0&4 | 36 1/4 x 29 7/8 x 35 5/8 | 9 | 115/60/1 | 3 | 300W/0.41HP | 5-15P | 261 | 39 1/2 x 33 3/8 x 39 |
| CUC48-2D | 1 & 2 | 48 1/4 x 29 7/8 x 35 5/8 | 12 | 115/60/1 | 4 | 380W/0.51HP | 5-15P | 285 | 51 1/2 x 33 3/8 x 39 |
| CUC48-4D | 0&4 | 48 1/4 x 29 7/8 x 35 5/8 | 12 | 115/60/1 | 4 | 380W/0.51HP | 5-15P | 296 | 51 1/2 x 33 3/8 x 39 |
| CUC60-2D | 1 & 2 | 61 1/8 x 29 7/8 x 35 5/8 | 15 | 115/60/1 | 4 | 380W/0.51HP | 5-15P | 358 | 64 1/2 x 33 3/8 x 39 |
| CUC60-4D | 0&4 | 61 1/8 x 29 7/8 x 35 5/8 | 15 | 115/60/1 | 4 | 380W/0.51HP | 5-15P | 379 | 64 1/2 x 33 3/8 x 39 |
| CUC72-2D | 2&2 | 71 3/4 x 29 7/8 x 35 5/8 | 18 | 115/60/1 | 4.5 | 400W/0.54HP | 5-15P | 415 | 75 x 33 3/8 x 39 |
| CUC72-4D | 1 & 4 | 71 3/4 x 29 7/8 x 35 5/8 | 18 | 115/60/1 | 4.5 | 400W/0.54HP | 5-15P | 432 | 75 x 33 3/8 x 39 |
| CUC72-6D | 0&6 | 71 3/4 x 29 7/8 x 35 5/8 | 18 | 115/60/1 | 4.5 | 400W/0.54HP | 5-15P | 430 | 75 x 33 3/8 x 39 |

If the data and structure update, without notice, subject to material object.

Under Counter Refrigerator With Drawer

