

# Under Counter Refrigerator

## With Side Mounted Compressor & Drawer



### Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.




### Temperature

- Interior temperature range: 1°C to 6°C ( 33°F to 46°F)
- Ambient temperature upto 45°C ( 113°F)

### Warranty

- 3 years parts and labour
- 5 years compressor warranty

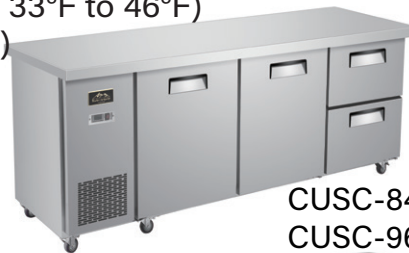

CUSC-84-2D  
CUSC-96-2D



CUSC-84-4D  
CUSC-96-4D



CUSC-48-2D



CUSC-60-2D  
CUSC-72-2D



CUSC-60-4D  
CUSC-72-4D



CUSC-84-6D  
CUSC-96-6D

### Specifications


Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUSC-48-2D	0&2	48 x 31 1/2 x 35 1/2	2	115/60/1	4	380W/0.51 HP	9.5	5-15P	316	51 3/8 x 35 1/4 x 39 1/4
CUSC-60-2D	1 &2	60 x 31 1/2 x 35 1/2	2	115/60/1	4.5	400W/0.54 HP	14.2	5-15P	373	63 5/8 x 35 1/4 x 39 1/4
CUSC-60-4D	0&4	60 x 31 1/2 x 35 1/2	2	115/60/1	4.5	400W/0.54 HP	14.2	5-15P	406	63 5/8 x 35 1/4 x 39 1/4
CUSC-72-2D	1 &2	72 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	19.1	5-15P	441	76 5/8 x 35 1/4 x 39 1/4
CUSC-72-4D	0&4	72 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	19.1	5-15P	474	76 5/8 x 35 1/4 x 39 1/4
CUSC-84-2D	2&2	84 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	23.4	5-15P	494	88 5/8 x 35 1/4 x 39 1/4
CUSC-84-4D	1 &4	84 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	23.4	5-15P	527	88 5/8 x 35 1/4 x 39 1/4
CUSC-84-6D	0&6	84 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	23.4	5-15P	560	88 5/8 x 35 1/4 x 39 1/4
CUSC-96-2D	2&2	96 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	27.7	5-15P	529	99 5/8 x 35 1/4 x 39 1/4
CUSC-96-4D	1 &4	96 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	27.7	5-15P	563	99 5/8 x 35 1/4 x 39 1/4
CUSC-96-6D	0&6	96 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	27.7	5-15P	596	99 5/8 x 35 1/4 x 39 1/4

**3 Year 5 Year**  
Parts+Labor Compressor  
WARRANTY


If the data and structure update, without notice, subject to material object.

# Under Counter Refrigerator


With Side Mounted Compressor & Drawer

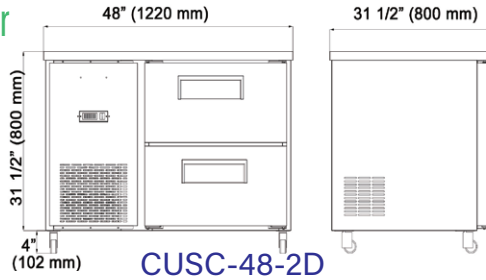


**CUSC-48-2D**

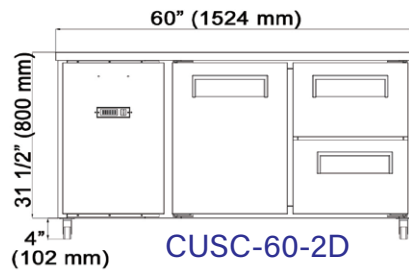


**CUSC-60-2D**

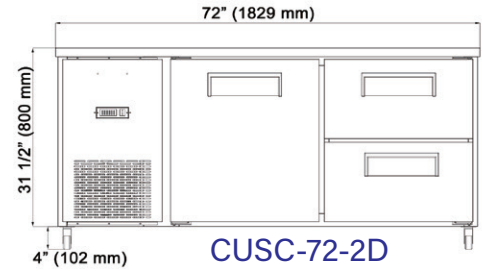


**CUSC-72-2D**

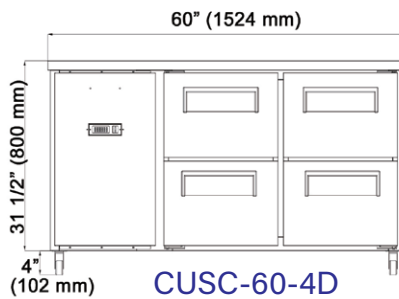


**CUSC-60-4D**

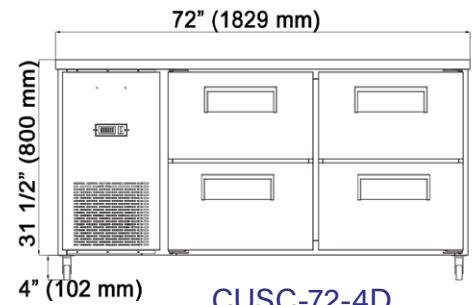


**CUSC-72-4D**

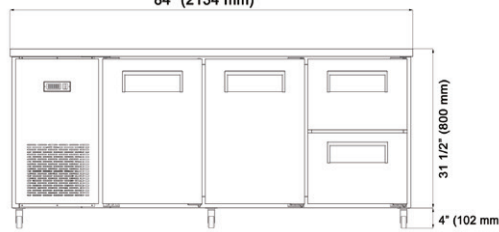


**CUSC-84-2D**

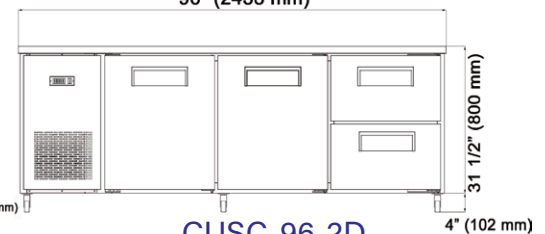


**CUSC-96-2D**

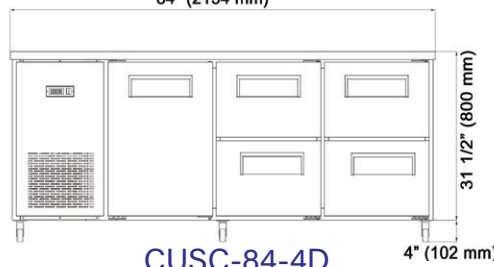


**CUSC-84-4D**

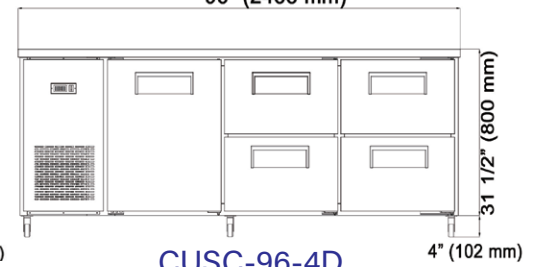

**CUSC-96-4D**

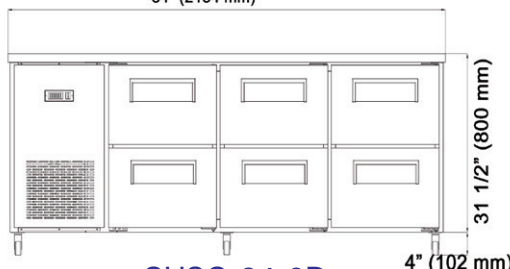

**CUSC-84-6D**

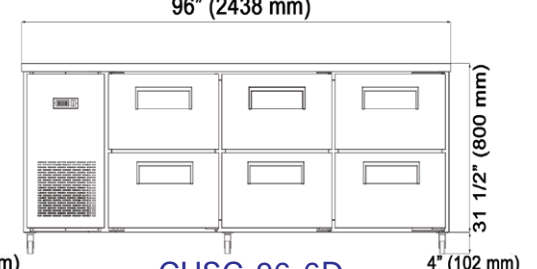

**CUSC-96-6D**