

HDMI2.0 70M 4K 18G Extender With Loop Out,

Support HDR10, Dual POC, SPDIF, Audio Extraction

Model: SX-EX63

/// OPERATION MANUAL



Dear Customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Notice

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute the warranty of any kind, express or implied.

Features

- HDMI2.0 Extender, Bandwidth 18Gbps, HDR10, Dual POC,HDCP2.2/1.4 Compliant
- Transmit up to 70m under 4K@60Hz YUV4:4:4, 90m under 4K@30Hz/1080P over single Cat5e/6 cable
- 1x HDMI loop out on transmitter
- Support EDID management
- Support wide band IR Pass through
- HDMI audio sampling rate up to 192KHz, max LPCM 7.1 channel
- Support S/PDIF and PCM2.0 analog audio extraction
- Support Dolby True HD, PCM and DTS-HD master audio
- Support Micro USB port to upgrade new firmware

MAIL-IN SERVICE

When shipping the unit carefully pack and send it prepaid, adequately insured and preferably in the original carton. Include a letter detailing the complaint and provide a day time phone and/or email address where you can be reached.

LIMITED WARRANTY LIMITS AND EXCLUSIONS

- 1) This Limited Warranty ONLY COVERS failures due to defects in materials or workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage. The Limited Warranty ALSO DOES NOT COVER damages which occurred in shipment, or failures which are caused by products not supplied by warrantor, or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, misadjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Service center or other Authorized Servicer, or damage that is attributable to acts of God.
- 2) THERE ARE NO EXPRESS WARRANTIES EXCEPT AS LISTED UNDER "LIMITED WARRANTY COVERAGE". THE WARRANTOR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, travel to and from the service, loss of or damage to media or images, data or other recorded content. The items listed are not exclusive, but are for illustration only.)
- 3) PARTS AND SERVICE, WHICH ARE NOT COVERED BY THIS LIMITED WARRANTY, ARE YOUR RESPONSIBILITY.

MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzene to clean this unit.

PRODUCT SERVICE

1) Damage requiring service:

The unit should be serviced by qualified service personnel if:

- (a) The DC power supply cord or AC adaptor has been damaged;
- (b) Objects or liquids have gotten into the unit;
- (c) The unit has been exposed to rain;
- (d) The unit does not operate normally or exhibits a marked change in performance;
- (e) The unit has been dropped or the cabinet damaged.

2) **Servicing Personnel:** Do not attempt to service the unit beyond that described in these operating instructions. Refer all other servicing to authorized servicing personnel.

3) **Replacement parts:** When parts need replacing ensure the servicer uses parts specified by the manufacturer or parts that have the same characteristics as the original parts. Unauthorized substitutes may result in fire, electric shock, or other hazards.

4) **Safety check:** After repairs or service, ask the servicer to perform safety checks to confirm that the unit is in proper working condition.

WARRANTY

If your product does not work properly because of a defect in materials or workmanship, our Company (referred to as "the warrantor") will, for the length of the period indicated as below, **(Parts 2) Year, Labor 90) Days** which starts with the date of original purchase ("Limited Warranty period"), at its option either(a) repair your product with new or refurbished parts, or (b) replace it with a new of a refurbished product. The decision to repair or replace will be made by the warrantor.

During the "Labor" Limited Warranty period there will be no charge for labor.

During the "Parts" warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers product purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

SPECIFICATIONS

Operating Temperature Range	-5 to +40°C(+23 to +104°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Connectors on Transmitter	HDMI Receptacle x 2 (1xHDMI input, 1xHDMI loop output) Power DC Receptacle x 1 IR Receptacle x 1(for IR TX)
Connectors on Receiver	HDMI Receptacle x 1 IR Receptacle x 1(for RX cable)
Resolution outputs	4k@60HzYUV4:4:4/ 4k@30HZ/1080p/1080i/720p/576p/480p
Audio format supported	DTS-HD Master Audio, Dolby True HD, LPCM7.1, PCM etc.
Output Video Signal	HDMI
Dimension (L×W×H)	TX: L75.8mm×W72.2mm × H18mm; RX: L75.8mm × W72.2mm × H18mm
Power supply	DC 12V1A Power supply
Power consumption	3.8W(MAX)
Transmission Distance	up to 70m under 4K@60Hz YUV4:4:4, 90m under 4K@30Hz/1080P ①
Net Weight	TX: 305g; RX:305g


Note 1 :Under perfect transmission conditions including straight cable runs with no electrical interference, bends, kinks, patch panels or wall outlets.

Package Contents

- 1xHDMI Transmitter
- 1xHDMI Receiver
- 1 x IR TX Emitter
- 1x IR RX Receiver
- 1x12V DC Adapter
- 1xUser Manual
- 4x Mounting Ears

PANEL DESCRIPTIONS

Transmitter Panel

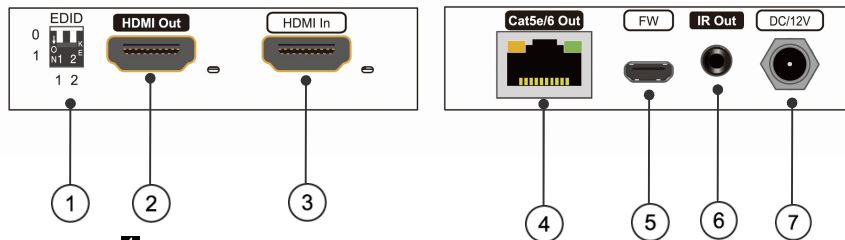

- ① EDID Switch
- ② HDMI input port
- ③ Firmware update port
- ④ DC 12V port


- ⑤ HDMI loop out port
- ⑥ Cat5e/6 output port
- ⑦ IR out port

Note: The transmitter has default EDID and copy EDID function, default EDID including 4K@60hz and 1080P@60hz, Copy EDID including to copy the near-end or far-end TV by the 2PIN DIP switch.

Up dial stands for 0, down dial stands for 1, different digits combination has different EDID effect according to the following table:

00	Default 4K60YUV420-2CH	01	Copy EDID from far-end display
10	Copy EDID from loop out display	11	Default 4K60YUV444-5.1CH

Receiver Panel

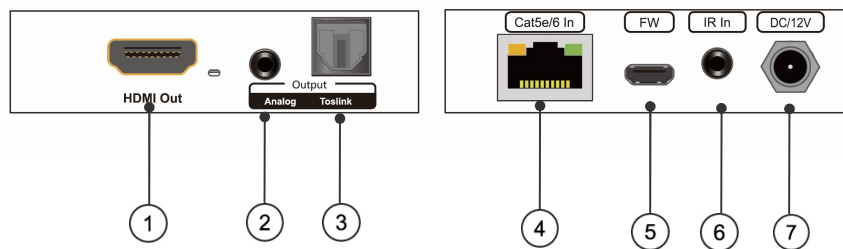

- ① HDMI out port
- ② Toslink out port
- ③ Firmware update port
- ④ DC 12V port

- ⑤ Analog stereo output port
- ⑥ Cat5e/6 input port
- ⑦ IR input port

Connecting and operating

1. Connect 1 source such as a Blu-Ray Player, game console, STB, etc. to the HDMI input on the transmitter
2. Connect 1 display such as an HDTV or HD Projector to the Loop HDMI output on the transmitter.
3. Connect 1 display such as an HDTV or HD Projector to the HDMI output on the receiver .
4. Connect a single Category 5e/6/7 up to (70m) to both transmitter and receiver.
5. Plug in the IR-RX cable and IR-TX cable to the IR jack port located on the Receiver and transmitter panel.
6. Power on the transmitter firstly, then power on the source and sink.

Connection Diagram

