

# **Commander Touch** Installation Templates

Model #: SXVCT1


10 mm

#### Below are two templates provided for installing the Commander Touch Display Controller.


- Flush Mount Template Use when installing the Display Controller when utilizing the
  included Flush Mount. Review the additional instructions on the next page for installing
  the Flush Mount before cutting the opening.
- 2. **Surface Mount Template** Use when Surface Mounting the Display Controller.

**CAUTION:** When printing these templates, be sure the print settings are set to print "actual size" and not "fit to page". Avoid reducing or enlarging the print size. Before cutting any openings, confirm that the templates are printed the exact size by measuring one of the lengths below with a ruler.

### **1. Flush Mount Template** (See installation instructions on the next page)

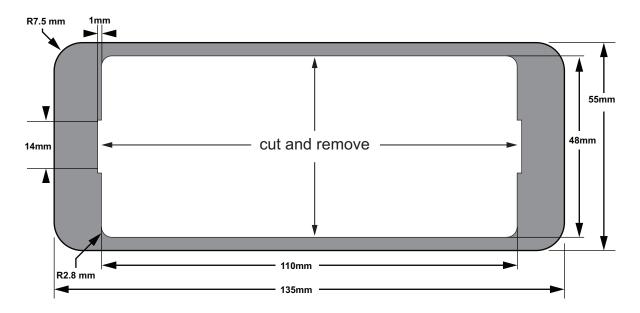

## 2. Surface Mount Template

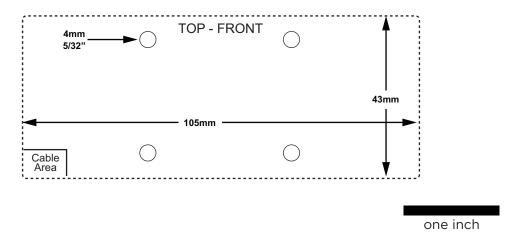



## **Commander Touch** Installation Templates

Model #: SXVCT1

### Installing the Commander Touch Display Controller Using the Flush Mount

- **A.** Locate a suitable place in your dash or center console for installing the Flush Mount. The Flush Mount requires an opening of 48 mm high x 110 mm wide, and an approximate clearance behind the dashboard or console of 25 mm depth to accommodate the Mounting Brackets. Avoid any location which will block or interfere with an airbag, or a location which interferes with the safe operation of the vehicle.
- **B.** Place the template on the area selected and carefully cut the opening, following the outline on the template.
- **C.** Once the opening has been cut, remove the template and place the Flush Mount in the opening. The Flush Mount is asymmetrical so the top/bottom orientation is not important.
- **D.** Bend each of the two Mounting Brackets into a U shape.
- **E.** Attach the Mounting Brackets to the rear of the Flush Mount, using the provided 4 screws. Position the legs of the Mounting Brackets against the inside of the dash or console surface and tighten the screws. Note that you may need to bend or cut the ends of the mounting brackets depending on the specific application.
- **F.** Once the Flush Mount is secured in place, insert the Commander Touch Display Controller into the Flush Mount. First, route the cable from the left side of the Display Controller into the opening at the bottom left of the Flush Mount, and then gently press the Display Controller into the Flush Mount, left side first and then the right side. It will snap into place.
- **G.** Route the cable from the Display Controller to the place behind the dash or center console where you plan to install the Tuner Module.

