

# Steam Lever Installation Instructions

---

Barista Express, Barista Pro,  
& Breville Infuser

CREMA  
coffee products

The following instructions will be demonstrated on the Breville Barista Express. Installation procedure for the Infuser or Barista Pro will follow nearly identical steps to those shown in this demonstration.

For Breville Infuser, skip steps 2 and 3.



## STEP 1

Disconnect the machine from the power source and make sure the machine has fully cooled before moving forward. If the machine has been powered on, the internal parts will be **EXTREMELY HOT**.



## STEP 2

Remove the bean hopper by turning the locking knob counterclockwise and lifting the hopper from the machine.





## STEP 3

To avoid coffee falling into your machine in the next step, we recommend using a small brush or hand-held vacuum to remove any residual coffee from around the burrs.



## STEP 4

Using a philips head screwdriver, locate and remove the screw hidden under the built-in tamper.





## STEP 5

Locate and remove the screw located directly in front of the steam wand and water spout.



## STEP 6

Remove the water tank from the back of the machine and use a philips head screwdriver to remove the five screws found at the top of the back panel.





## STEP 7

Gently remove the upper tray/lid from the machine and set aside.



Note for Barista Pro:

The Barista Pro has one additional retaining clip, located on the front, inside edge of the lid. GENTLY lift the lid from the back side first, causing the clip to pop loose.



## STEP 8

The Factory steam knob is held in place by a small pressure clip, located directly on the opposite side of the steam knob.

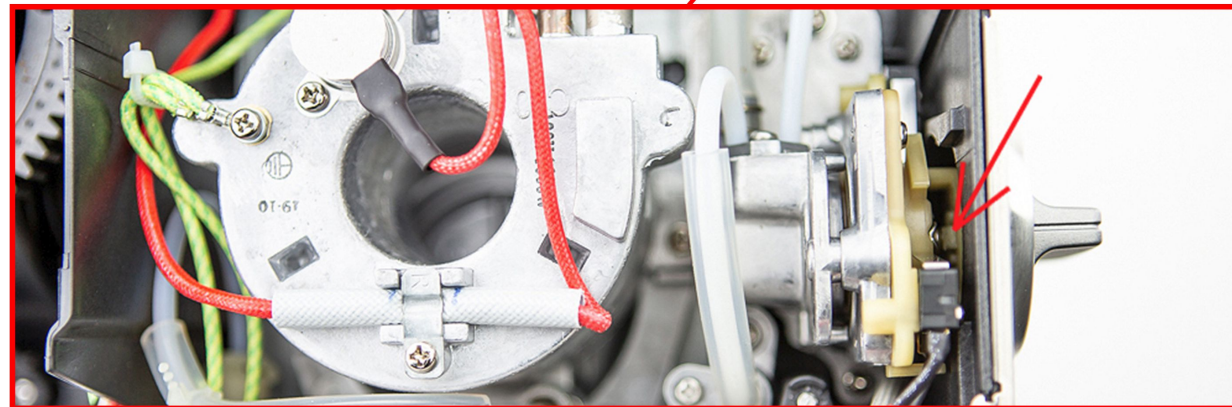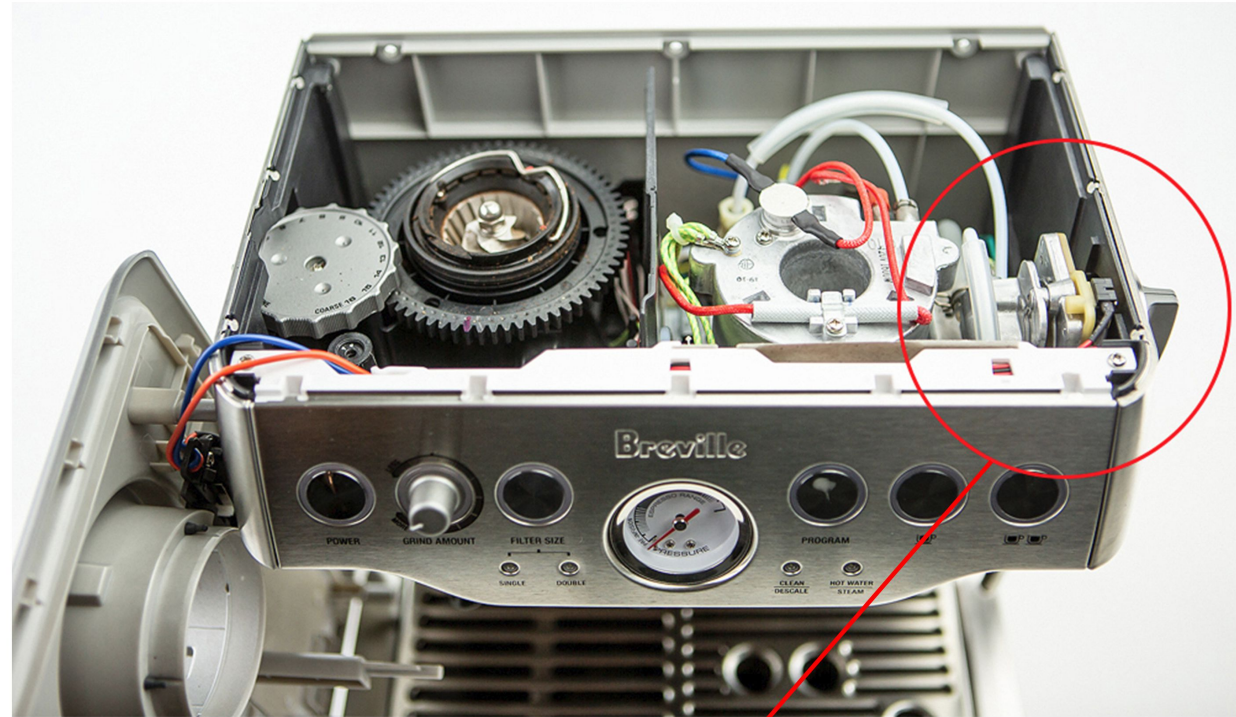





## STEP 9

Using a small Flathead screwdriver, carefully (but firmly) press downward and outward on the top of the pressure clip.



Depressing the clip properly will cause the steam knob to “pop” out.

\*\*Skip Forward for a better view of the pressure clip\*\*

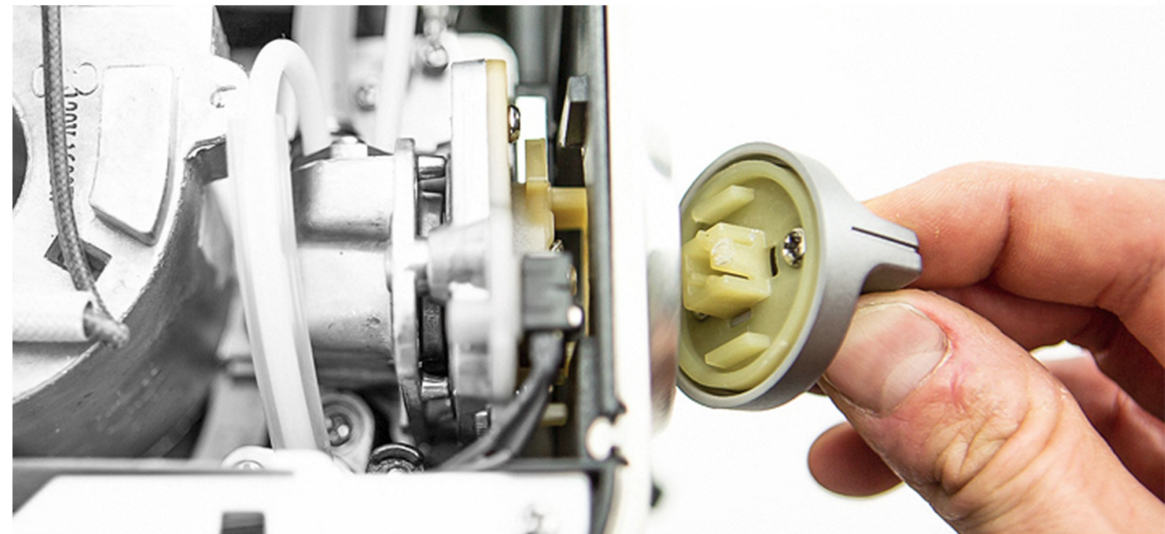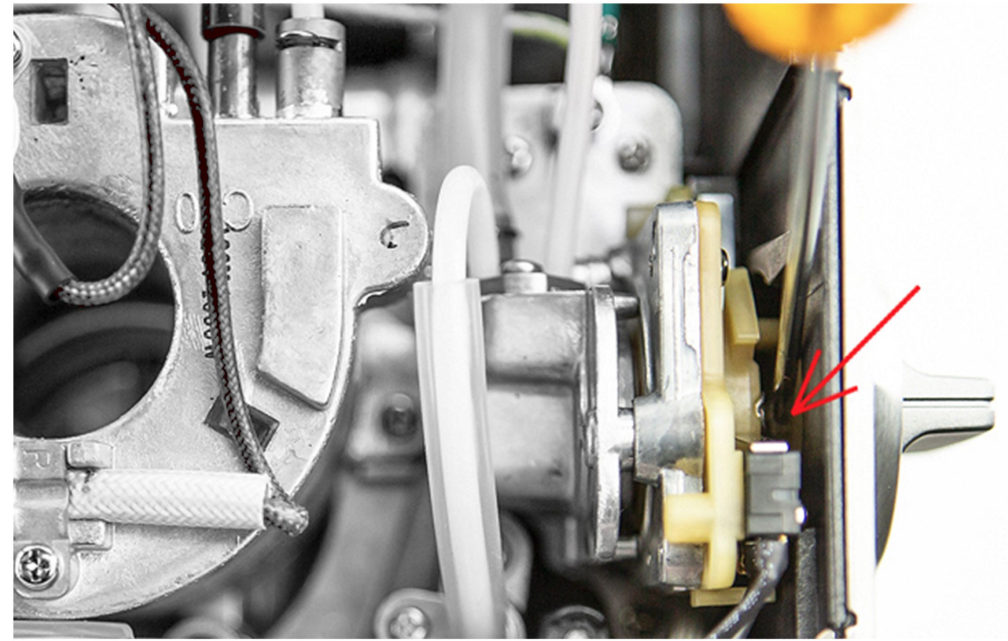


(Expanded View)

Here you can see an expanded view of the pressure clip mentioned in Step 9.

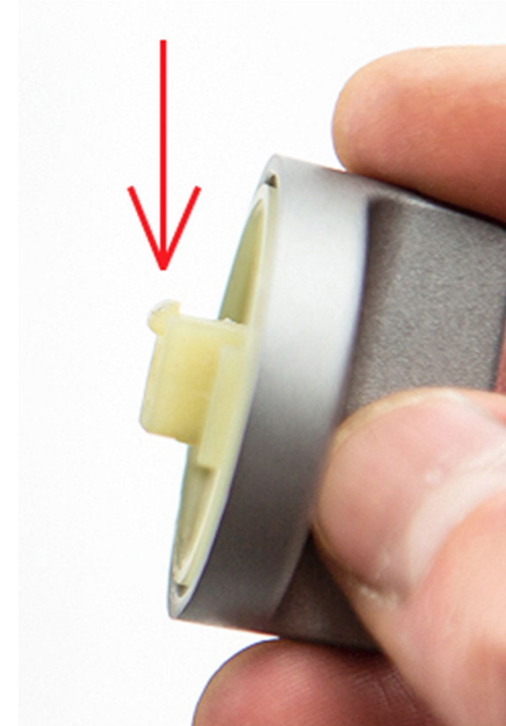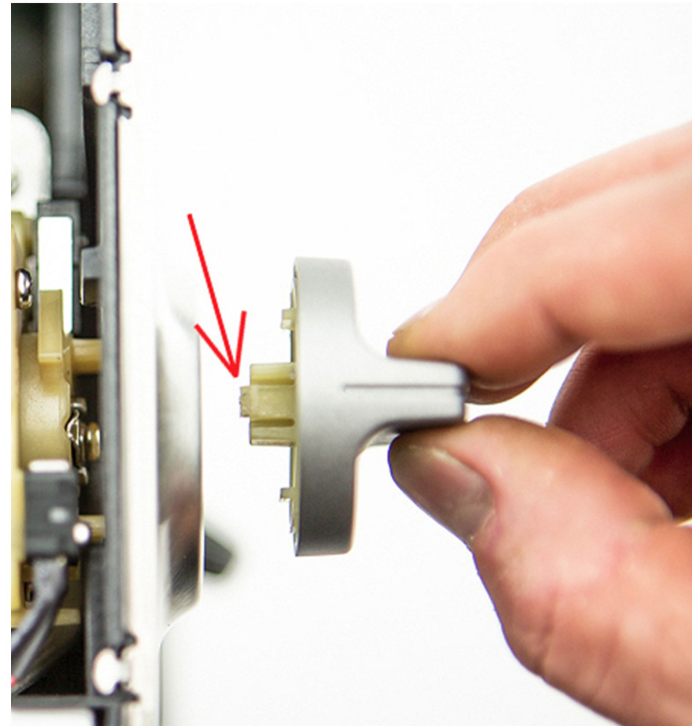

## STEP 11

Remove the screws  
from the back side of  
Breville steam knob.

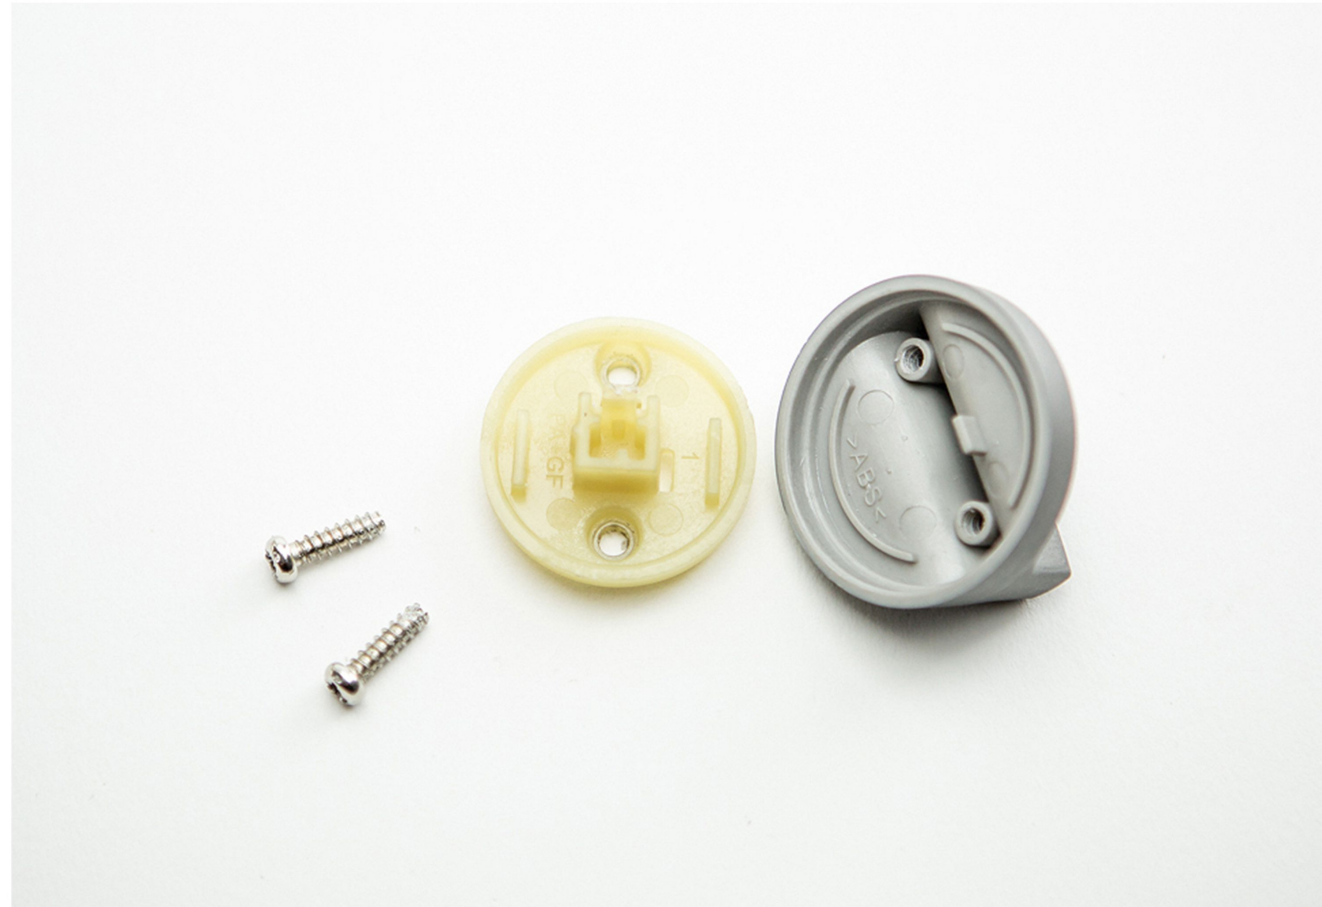



## STEP 12

Using the screws provided with the replacement steam lever, attach the yellow retaining clip backing to the back side of the steam lever.



**Note:** The pressure clip should be oriented in the same direction as the lever/handle.



## STEP 13

Press the steam lever into the machine.

When fully inserted, the pressure clip should “pop” back into place.

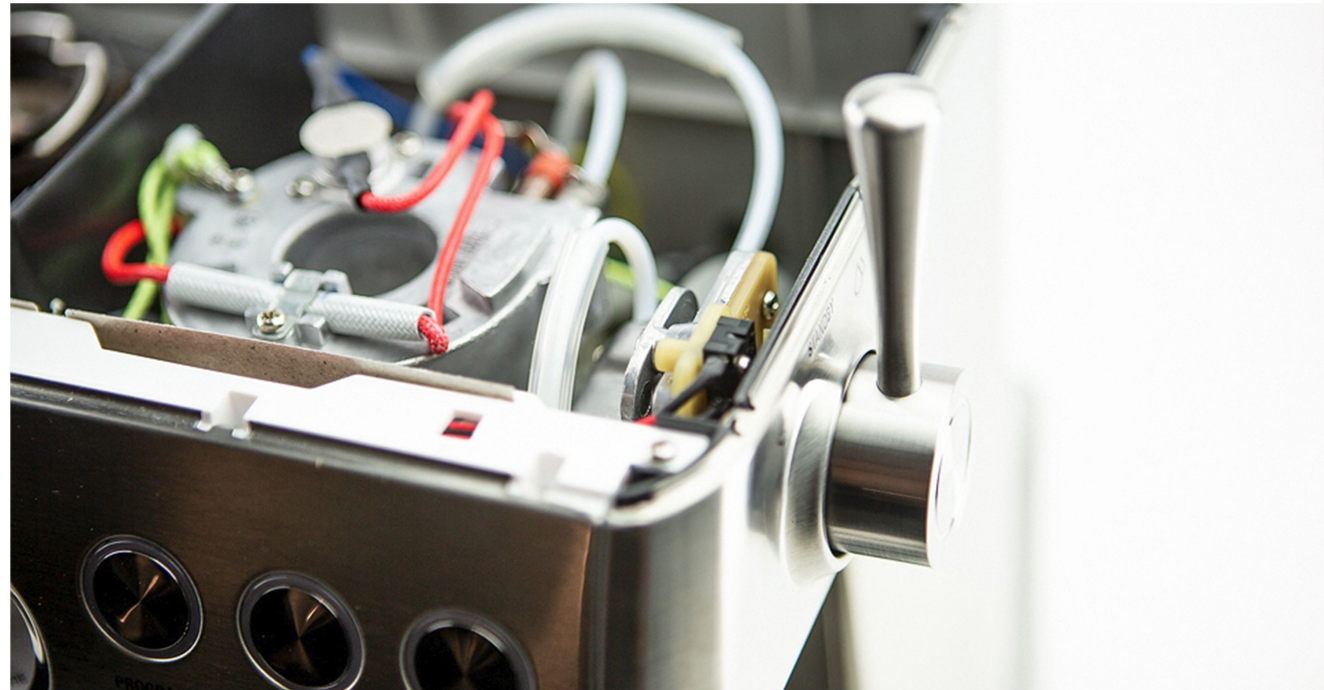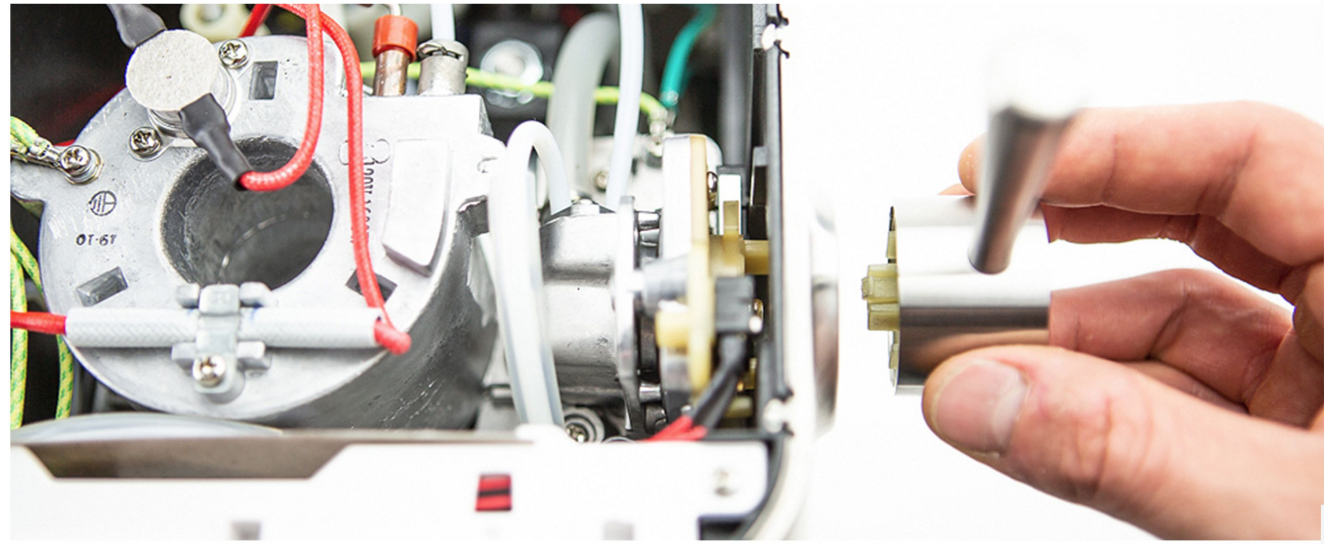



## STEP 14

Replace the lid, screws, water tank and bean hopper from the previous steps, and you're all set!

### IMPORTANT NOTE:

Take care not to apply excessive downward (or sideward) pressure when using the steam lever, as excess force may damage the internal parts of the machine.

