

Wheel Set Installation Instructions

for the Barista Express

CREMA
coffee products

IMPORTANT:

Disconnect your machine from its power source and allow the machine to cool completely before moving forward with your installation.

STEP 1

Remove the drip tray, accessory tray and water tank from your machine.



STEP 2

Gently rest your machine on its side, providing access to the bottom of the machine.

To protect the machine, and *to catch residual water* from the water tank's inlet, lay a towel on your workstation before tipping the machine.

TIP: Instead of laying the machine on its side, you can also access the bottom of the machine by (carefully) hanging one side of the machine over the edge of a countertop and working from the floor, one side of the machine at a time.

CREMA
coffee products



STEP 3

Using a Philips screwdriver, remove the existing rubber feet from all four corners of the machine.

Set the screws aside to be used with STEPS 4 and 5.





STEP 4

Pair a square washer with a wheel assembly by sliding the washer onto the screw and then inserting the screw into the wheel assembly.

Match the wheel assembly to the appropriate side of the rear mounts and *gently* thread the screw into place.

CAUTION: Do not over tighten screws.

Repeat for the second wheel assembly.

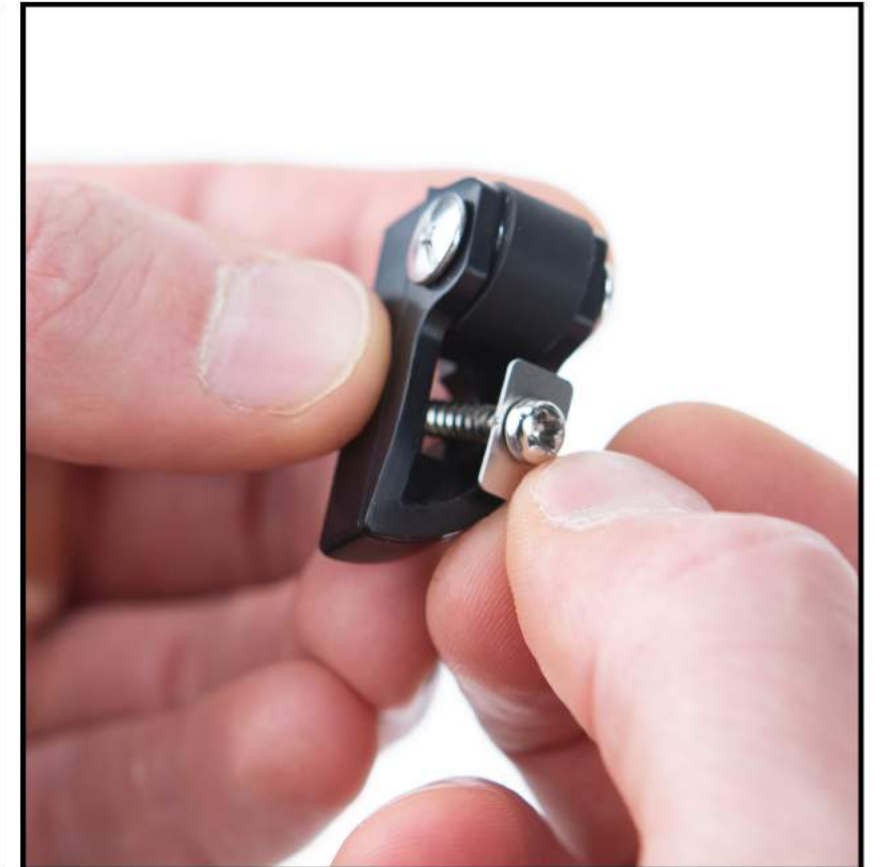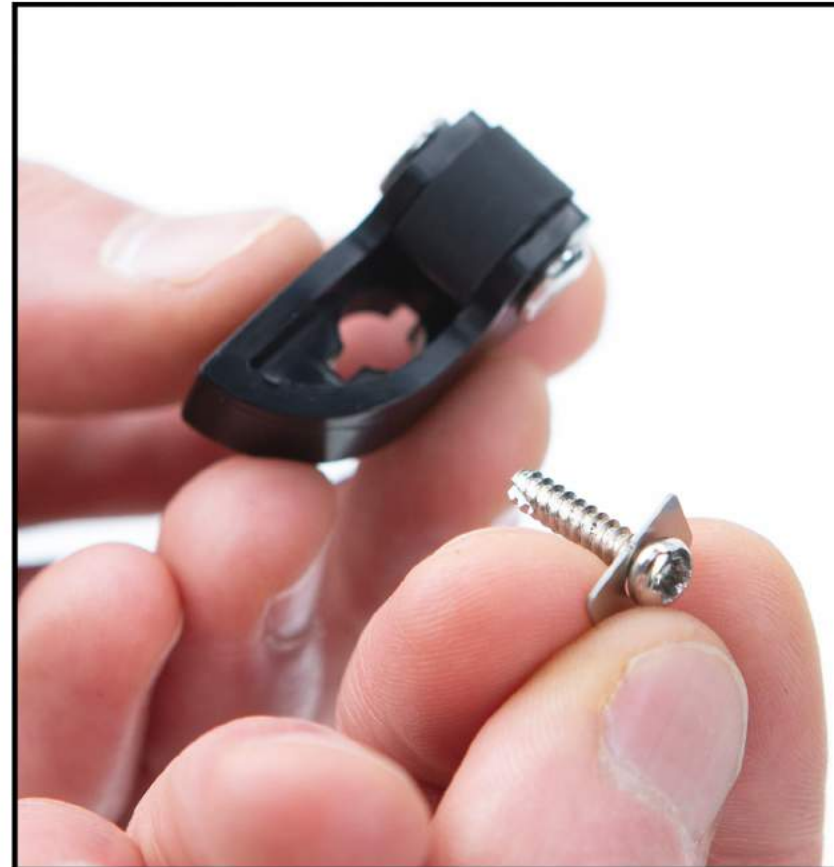

STEP 5

Pair a triangular washer with a front foot housing by sliding the washer onto the screw and then inserting the screw into the housing.

Match the front foot to the appropriate front mounting location and *gently* thread the screw into place.

CAUTION: Do not over tighten screws.

Insert the rubber foot cap, then repeat for the second foot housing.



STEP 6

Replace your drip tray, accessory tray, water tank and...

...Get Rollin!'

