


Unless otherwise specified, tolerance as per ISO 2768-class m

- 1. Parts must be free from burr & visible dents
- 2. Leg height variation must be within ±0.20mm
- 3. Dimensions marked with " are special characteristics

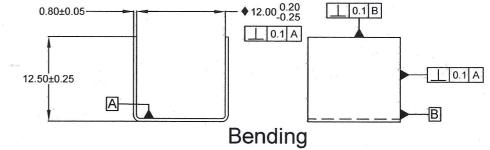

Sr.No	Modifications	Checked	Approved	Date	PERMANENT MAGNETS LTDHIPERM	All Dimensions in mm
1.	Air Gap 12.00±0.25 is defined as special characteristics with symbol ♦				MIRA ROAD (E) - 401104	
***					Description: U12-13-12.5-0.8 Shield	SCALE PREPARED APC Apular 6/3/2 NTS CHECKED DV 8 0 HA 6/3/2
			(Material: 48% NiFe ; 0.80mm thick	SIZE A4 APPROVED A RV 10 15 12
-2.000 - 26.000			r _j .		THE COPYRIGHT OF THESE DRAWINGS AND OF ALL ENCLOSURES ENTRUSTED TO THE RECEIPENT PERSONALLY REMAINS THE EXCLUSIVE PROPERTY OF THIS FIRM. WITHOUT OUR WRITTEN CONSENT THEY MAY NOT BE COPIED OR	Drawing No.
					REPRODUCED OR DELIVERED OR MADE KNOWN TO THIRD PARTIES. DO NOT SCALE THE DRG. IF IN DOUBT ASK.	C-SH-007-R1