

General Description:

The PCB-mounted current sensor is designed for accurate measurement of AC, DC and pulsed DC currents, offering reliable galvanic isolation between the primary and secondary circuits. It comes pre-calibrated to simplify integration and ensure consistent performance across a wide range of applications.

Features:

- PCB mount
- Pre-calibrated
- AC and DC current measurement
- Compact and cost efficient design
- Fast response
- Good electrical Isolation
- RoHS & REACH compliant

Advantages:

- Excellent measurement accuracy
- Low magnetic and electrical offset
- Good linearity
- Low sensitivity drift
- Easy installation (PCB mount)
- Low power consumption
- Light weight
- Robust Design

Application:


- Motor Control Units (MCUs) for Electric Vehicles
- Inverters for Electric Vehicles
- DC-DC Converters for Electric Vehicles
- Charging Systems for Solar and Electric Vehicles
- Battery Management and Monitoring Systems

Absolute Maximum Ratings:

Parameter	Symbol	Value	Unit
Positive Supply Voltage (overvoltage)	V_{DD}	+10	V
Reverse Voltage Protection	$V_{S_{REV}}$	-0.3	V
Positive Output Voltage	V_{OUT}	+10	V
Output Current	I_{OUT}	+70	mA
Reverse Output Voltage	$V_{O_{REV}}$	-0.3	V
Reverse Output Current	$I_{O_{REV}}$	-50	mA
Operating Ambient Temperature Range	T_A	-40 to +150	°C
Storage Temperature Range	T_S	-55 to +165	°C
Magnetic Flux Density	$I_{P_{MAX}}$	±10	kA
ESD – Human Body Model	ESD_{HMB}	2	kV

Note: Exceeding the absolute maximum ratings may cause permanent damage. Exposure to absolute maximum-rated conditions for extended periods of time may affect the sensor reliability.

Product Drawing:

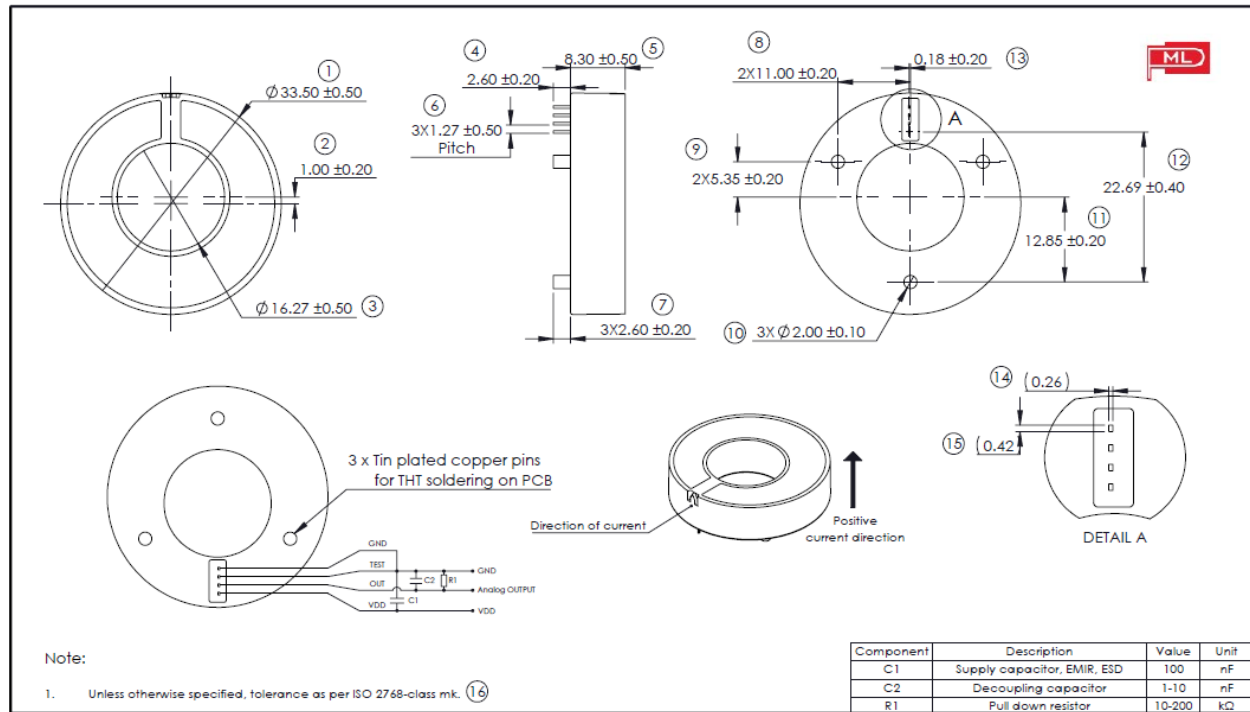

Ordering information:

Part Number: T-CR-048-R1

Note: HNCB-800 comes factory calibrated for $800A_{pk}$. PML also supports HNCB-800 calibrated for other current ratings.

General Electrical Specification:

Operating conditions $T_A = 25^\circ\text{C}$, $V_{DD} = 5V \pm 0.05\%$, unless otherwise specified.

Parameter	Symbol	Test condition	Min	Typ	Max	Unit
Nominal Supply Voltage	V_{DD}		4.5	5	5.5	V
Nominal Supply Current	I_{DD}			12.5	15	mA
Output Impedance	R_{OUT}	$V_{OUT} = 50\% V_{DD}$		1	5	Ω
Output Capacitive Load	C_L		1		10	nF
Output Resistive Load	R_{LOAD}	Output resistive load for high linearity and diagnostic band.	10	25	200	k Ω
Linear Output Range	$V_{O_{LIN}}$	Pull-down $\geq 10k\Omega$	10		90	$\%V_{DD}$
Sensitivity	S			2.5		mV/A
Primary current ⁽¹⁾	I_P	DC	-800		800	A_{PK}
		AC	-565.6		565.6	A_{RMS}

⁽¹⁾HNCB-800 comes factory calibrated for $800A_{PK}$. PML also supports HNCB-800 calibrated for other current ratings.

Accuracy Specification:

Operating conditions $T_A = 25^\circ\text{C}$, $V_{DD} = 5V \pm 0.05\%$, unless otherwise specified.

Parameter	Symbol	Test condition	Min	Typ	Max	Unit
Electrical Offset Voltage	V_E			± 2	± 5	mV
Magnetic Offset Current	I_{MO}				± 0.3	$\%I_P$
Sensitivity error @ I_P	S_M				± 0.3	$\%S$
Linearity error 0... I_P	NL				± 0.2	$\%I_P$
Measurement error 0... I_P	E_M				± 1	$\%I_P$

Timing Specification:

Operating conditions $T_A = 25^\circ\text{C}$, $V_{DD} = 5V \pm 0.05\%$, unless otherwise specified.


Parameter	Symbol	Test condition	Min	Typ	Max	Unit
Power on Delay	T_{POD}	$V_{OUT} = 100\% \text{ of F.S.}$			1	ms
Refresh rate	T_{RR}		0.8	1	2	μs
Step Response Time ($C_L = 10\text{nF}$)	T_R			6		μs
Bandwidth	BW			100		kHz

Note: The accuracy specifications are defined for the factory calibrated sensitivity. The HNCB-800 accuracy may vary from above specifications based on the user application.


Typical Performance:

Operating conditions $T_A = 25^\circ\text{C}$, $V_{DD} = 5V \pm 0.05\%$, unless otherwise specified.

DC current (A) vs %Fs Error

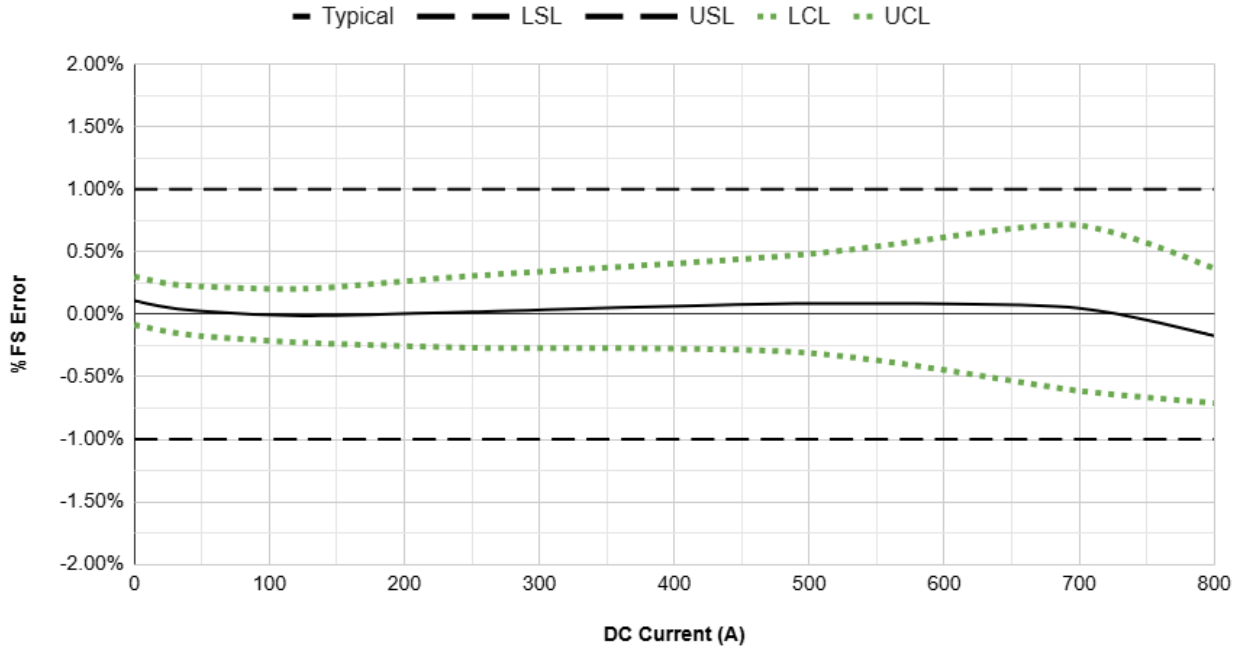

DC current (A) vs Output(mV)

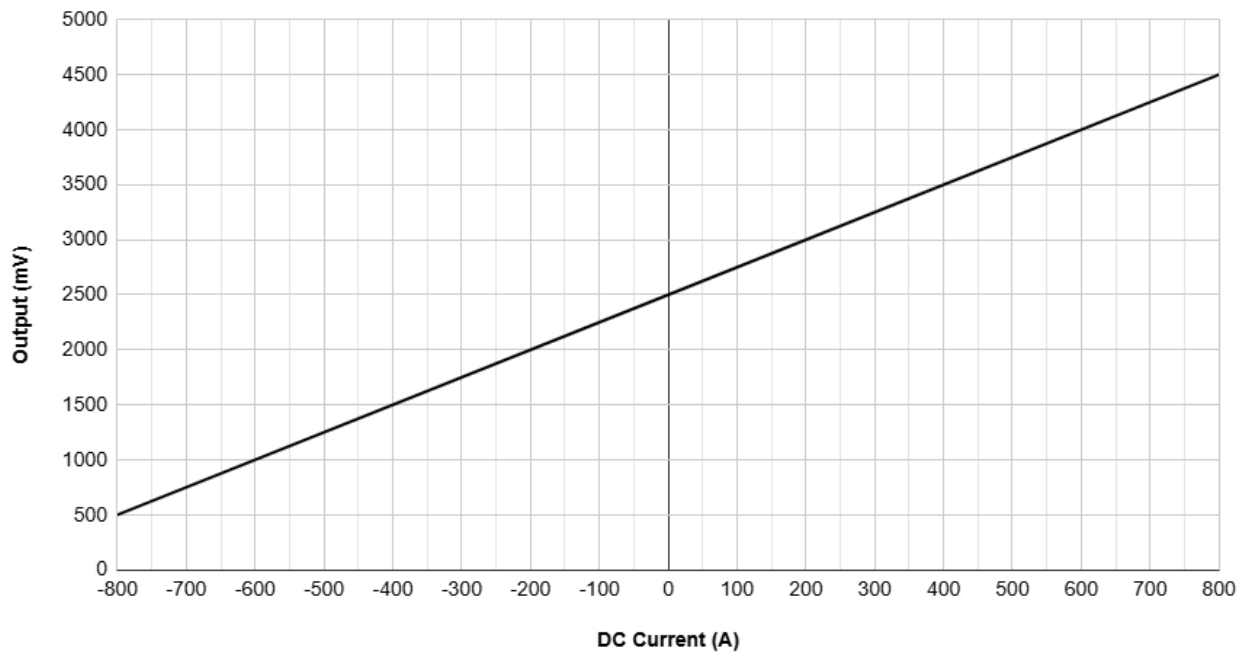

Disclaimer:

PML Disclaimer

Legal Disclaimer Notice This legal disclaimer applies to purchasers and users of PML products manufactured by or on behalf of PML and its affiliates (collectively, "PML").

Version control:

Information contained in this data sheet is up-to-date as at the date of issue. Unless otherwise expressly indicated in writing, PML products and data sheets relating thereto are subject to change without notice.

Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for PML products.

Latest version of the datasheet can be obtained by email upon request to sales@pmlindia.com

Function of product:

The characteristics and parameters of a PML product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on PML's knowledge of typical requirements in generic applications.

The characteristics and parameters of a PML product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the PML product with other components in the user's application, or (ii) the environment of the user application itself.

The characteristics and parameters of a PML product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the PML product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Qualifications:

Unless PML has explicitly designated an individual PML product as meeting the requirements of a particular industry standard (for example, ISO/TS 16949) or a particular qualification (for example, UL listed or recognized), PML is not responsible for any failure of an individual PML product to meet the requirements of such industry standard or particular qualification.

Application:

PML expressly identifies those PML standard products that are suitable for use in any applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized PML representatives on a case-by-case basis, use of any other PML standard products in a particular application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If PML expressly identifies a sub-category of application in the data sheet for its standard products (example: infotainment or lighting), such identification means that PML has reviewed its standard product and has determined that if such PML standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to PML standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that PML has approved such product for use in an automotive application.

Use restrictions:

Users and buyer of PML products shall not sell, transfer, export or re-export any PML products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use PML products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, PML products and PML technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. PML products may not, without prior authorization from PML and/or the Indian Government, be resold, transferred, or re-exported to any party not eligible to receive Indian commodities, software, and technical data.

Damage:

To the maximum extent permitted by applicable law, PML disclaims any and all liability for (but not limited to) special, punitive, consequential, incidental or indirect damages, lost revenues, lost profits, property damage, product damage, loss of life, personal injury resulting from the use of PML product or reliance upon the information contained in this data sheet.

Safety:

Users of PML products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications. PML products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage.

Warranty:

PML disclaims any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

Mailing Address:

Permanent Magnets Limited, B-3, MIDC Industrial Area, Mira-gaon, Mira road-East, Thane-401107, Maharashtra, India.

Revision history:

Revision No	Change description	Release date
R0	Initial release	
R1	Corrected Absolute Maximum Ratings for Magnetic Flux density to Primary Current	21-07-2025
R2	General Changes: Formatting improvements across the document. Corrected "Operating Conditions" from "TA = 25°C, VDD = 5V±10%" to "TA = 25°C, VDD = 5V±0.05%" in: – General Electrical Specification – Accuracy Specification – Timing Specification – Typical Performance section – Graph plotting axes – Drawing section Ordering Information: Updated note from: "HNCB-800 comes factory calibrated for 800A DC" to: "HNCB-800 comes factory calibrated for 800Apk" Timing Specifications: • Included Step Response Time. • Changed bandwidth from 250kHz to 100kHz. • Modified note from: "The above specifications represent the hall sensor response time. The accuracy specifications are defined for the factory calibrated sensitivity. The HNCB-500 accuracy may vary from above specifications based on the user application." to: "The accuracy specifications are defined for the factory calibrated sensitivity. The HNCB-500 accuracy may vary from above specifications based on the user application." Electrical Specifications: • Removed test condition for Sensitivity in General Electrical Specifications section. Graphs & Figures: • Corrected timing specification labeling (VOUT to VOUT). • Cropped graph and replaced with text labels:	07-08-2025

	"DC current (A) vs %FS Error" and "DC current (A) vs Output (mV)".	