
Prosport Inc. Premium Fuel Pressure Amber/White Display (270° Scale)

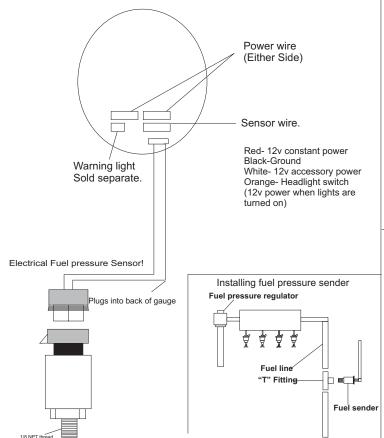

Setting warning / Mute Feature

To set the warning feature:


After the opening ceremony is complete, Press and hold the button down for approx 5 seconds until the pointer begins to blink. Release button. Push and hold button to move quickly across the scale or Toggle button to move pointer in small increments. Once you have the pointer were you want it, wait 5 seconds to "set" and pointer will stop blinking

Mute feature:


- 1.) With ignition key in off position, press and hold button-
- Turn Ignition on, wait for pointer to come to a rest then release button.
- 2.) To turn sound back on-Repeat step 1

Peak recall

- 1.) Push button one time to recall peak level. The Blue light will come on when gauge is in recall mode. The pointer will rise to the Highest level attained by the gauge and remain there approximatley 5 seconds.
- 2.) To reset peak level: While in peak mode (blue light is on) press and hold button down

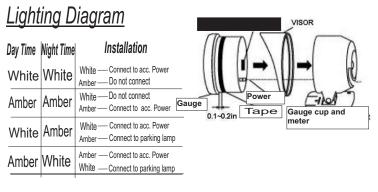

Premium Exhaust Gas Temp






To insure proper installation, we recommend having a professional shop Drill and tap for the probe. The probe needs a 1/8 NPT tap.

The probe is very sensitive. Please make sure the probe has enough clearance going into the manifold. If the probe is screwed in and hits the other side of the manifold it will cause the tip to snap or bend.

The White wire connects to the pink wire on the probe The black wire connects to the blue wire on the probe

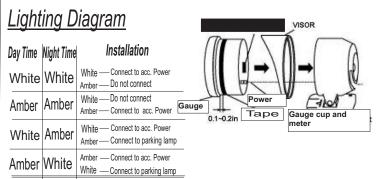

WWW.PROSPORTGAUGES.COM