
# Prosport Inc. Performance Fuel Pressure Gauge Blue/White Display (270° Scale)

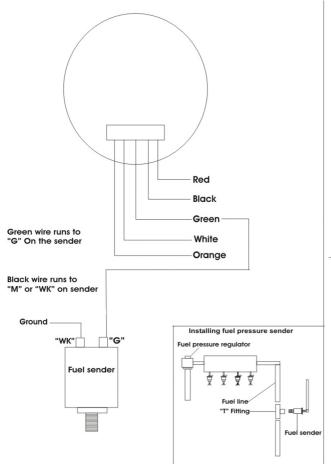

### **Wiring Instructions**

(White during the day, Blue at Night)

Red- 12v Accessory power

White- 12v Accessory power

Black- Ground

Orange- 12v Headlight Switched Power

(This is a power source that only gets power when


headlights are on)

Green- Connect to "G" terminal on sender

### Sender


"Wk" Terminal- Ground

"G" Terminal- Attach green wire from gauge




Do not over tighten bolts when installing U bracket. Doing so will cause damage to movement inside.

# Performance Exhaust gas temp Gauge Blue/White Display (270° Scale)



### Drill a hole On either position And installing the 1/8 PT thread jointer



You will need to drill and tap a 1/8th NPT fitting for the probe to go into. We recommend a professional to tap this. Try to avoid shavings from going into the manifold or exhaust.

## **Lighting Options**

Day Time	Night Time	Installation
		White Connect to acc. Power
White	White	Orange Do not connect
Blue	Blue	White Do not connect
	2.00	Orange Connect to acc. Power
		White Connect to acc. Power
White	Blue	Orange Connect to Headlight Switched Power
Blue	White	White Connect to Headlight Switched Power
		Orange Connect to acc. Power

### Wiring Instructions

Red-12v Accessory power

Black- Ground

White- Accessory power on

Orange-Head light switch

(12v switch power)