



90


135


180

225 270

315

Orientation from Motor Side



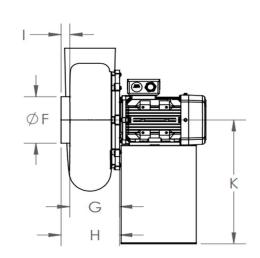

Blower shown with Optional Motor Support Stand

		Mechanical Data								
	ØA (OD)	С	D	ØF (OD)	G	Н	ı	J		
in	4.91	16.51	8.92	4.91	5.19	6.96	1.77	8.57		
mm	125	420	227	125	132	177	45	218		

360

 \mathcal{C}^{M}

45

	Mot	or Height (K)
	0.50 Hp	1.5 Hp
in	14.95	14.95
mm	380	380

Project Name	
Date	
Engineer/Sales Rep	
Client	
Contractor	




Model Numbers

Model Number	Max. Flow (cfm)	Min. Flow (cfm)	Max. Static (in. Wg)	Min. Static (in. Wg)	Phase	Power (hp)	RPM	Voltage (V)	FLA	Weight (lb)
S14XS4P050	400	35	2	0.1	Single Phase	0.75	1740	115/208- 230	7.2/4.3	34.6
S14XS2P150	800	35	8	0.1	Single Phase	1.5	3510	115/208- 230	13.1/8.75	6.0
S14XT4P050	400	35	2	0.1	Three Phase	0.75	1730	208- 230/460	2.35/1.29	34.6
S14XT2P150	800	35	8	0.1	Three Phase	1.5	3510	208- 230/460	3.9/2.02	6.0



Performance Curve

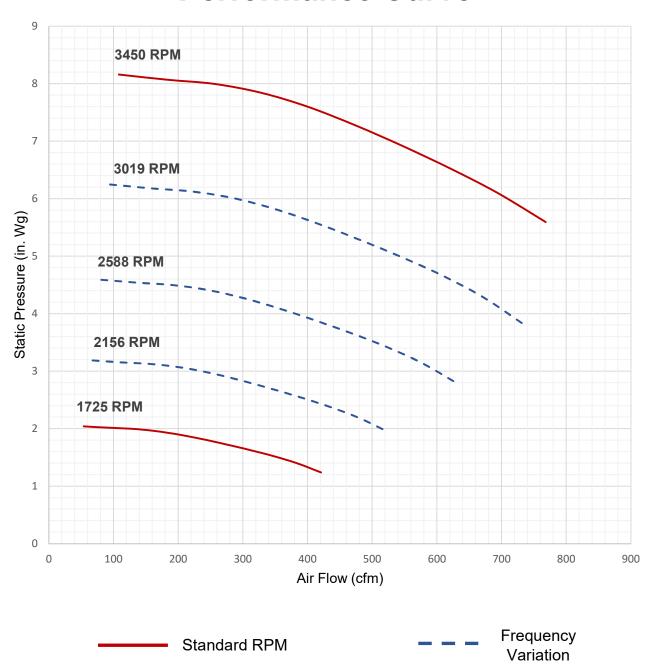




Acoustic Data

		Qv	Ps	Octave Band (Hz)				Lw	Lw(A)	Lp(A)				
		(cfm)	(inwg)	63	125	250	500	1000	2000	4000	8000	dB	dB(A)	dB(A)
	Inlet 1	743	5.55	80.5	65.8	78.1	79.9	83.0	76.8	83.8	68.9	93.5	91.4	89.4
	Inlet 2	551	6.69	80.0	69.2	79.1	77.9	82.0	76.0	82.4	67.1	93.1	90.1	88.1
5	Inlet 3	412	7.31	85.2	66.9	74.9	75.9	80.7	74.5	76.2	64.1	93.8	88.4	86.4
RPM	Inlet 4	274	7.91	82.5	65.3	73.9	74.4	79.3	73.1	74.7	62.5	93.7	87.6	85.6
00	0.41.14	740		04.0	00.0	00.5	07.0	00.7	040	77.4	70.0	00.0	05.4	
3450	Outlet 1	743	5.55	81.3	83.2	92.5	87.2	86.7	81.8	77.1	70.6	99.3	95.4	93.3
(*)	Outlet 2	551	6.69	84.5	85.6	91.5	85.0	85.6	80.1	75.3	68.7	99	93.8	91.8
	Outlet 3	412	7.31	88.4	85.1	88.6	83.2	84.7	79.6	73.5	67	99.4	92.3	90.3
	Outlet 4	274	7.91	88.9	81.6	86.2	81.9	83.3	79.5	72.5	65.7	98.8	91.3	89.2
	Inlet 1	372	1.39	65.4	50.7	63	64.8	67.9	61.7	68.7	53.8	78.4	76.4	74.3
	Inlet 2	275	1.67	64.9	54.1	64	62.8	66.9	61.0	67.4	52	78	75.1	73.0
5	Inlet 3	206	1.83	70.1	51.8	59.8	60.9	65.6	59.4	61.1	49.1	78.8	73.4	71.3
RPM	Inlet 4	137	1.98	67.4	50.2	58.8	59.3	64.3	58.0	59.6	47.5	78.6	72.6	70.5
1725	Outlet 1	372	1.39	66.2	68.1	77.4	72.1	71.7	66.7	62.0	55.6	84.2	80.3	78.3
	Outlet 2	275	1.67	69.4	70.5	76.5	70.0	70.6	65.1	60.2	53.7	83.9	78.8	76.7
	Outlet 3	206	1.83	73.4	70.0	73.5	68.1	69.6	64.5	58.4	51.9	84.3	77.3	75.2
	Outlet 4	137	1.98	73.9	66.5	71.2	66.9	68.2	64.4	57.5	50.6	83.8	76.2	74.2



Expanded View

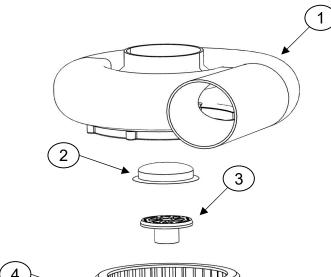

1	Housing
2	Hub Cap
3	Hub
4	Impeller
5	Motor Plate
6	Motor
7	Motor Plate Seal
8	Shaft Key

