

Blower shown with Optional Motor Support Stand

		Mechanical Data								
_		ØA (OD)	С	D	ØF (OD)	G	Н	I	J	
	in	4.91	16.51	8.92	4.91	5.19	6.96	1.77	8.57	
	mm	125	420	227	125	132	177	45	218	

	Motor Height (K)							
	0.50 Hp	1.5 Hp						
in	14.59	14.95						
mm	371	380						


Project Name	
Date	
Engineer/Sales Rep	
Client	
Contractor	



Model Numbers

Model Number	Max. Flow (cfm)	Min. Flow (cfm)	Max. Static (in. Wg)	Min. Static (in. Wg)	Phase	Power (hp)	RPM	Voltage (V)	FLA	Weight (lb)
S14SS4P050	400	35	2	0.1	Single Phase	0.5	1710	115/208- 230	5.26/2.73- 2.63	21.2
S14SS2P150	400	35	2	0.1	Single Phase	1.5	3435	115/208- 230	12.50/7.24- 6.24	30.2
S14ST4P050	400	35	2	0.1	Three Phase	0.5	1705	208- 230/460	1.90- 1.78/0.89	19.1
S14ST2P150	800	35	8	0.1	Three Phase	1.5	3510	208- 230/460	4.44- 4.26/2.13	29.3
S14CT2P150	800	35	8	0.1	Three Phase	1.5	3510	575	1.64	29.3
S14CT4P050	400	35	2	0.1	Three Phase	0.5	1700	575	0.73	19.1



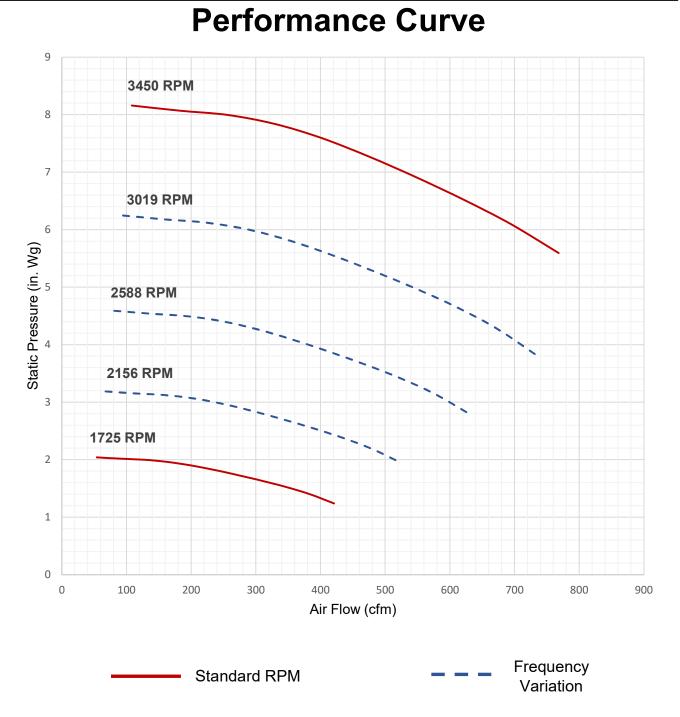



Acoustic Data

		Qv	Ps	Octave Band (Hz)				Lw	Lw(A)	Lp(A)				
		(cfm)	(inwg)	63	125	250	500	1000	2000	4000	8000	dB	dB(A)	dB(A)
	Inlet 1	743	5.55	80.5	65.8	78.1	79.9	83.0	76.8	83.8	68.9	93.5	91.4	89.4
	Inlet 2	551	6.69	80.0	69.2	79.1	77.9	82.0	76.0	82.4	67.1	93.1	90.1	88.1
Σ	Inlet 3	412	7.31	85.2	66.9	74.9	75.9	80.7	74.5	76.2	64.1	93.8	88.4	86.4
RPM	Inlet 4	274	7.91	82.5	65.3	73.9	74.4	79.3	73.1	74.7	62.5	93.7	87.6	85.6
0		740		04.0	00.0	00.5	07.0	00.7		4	70.0	00.0	05.4	
3450	Outlet 1	743	5.55	81.3	83.2	92.5	87.2	86.7	81.8	77.1	70.6			93.3
က	Outlet 2	551	6.69	84.5	85.6	91.5	85.0	85.6	80.1	75.3	68.7	99	93.8	91.8
	Outlet 3	412	7.31	88.4	85.1	88.6	83.2	84.7	79.6	73.5	67	99.4	92.3	90.3
	Outlet 4	274	7.91	88.9	81.6	86.2	81.9	83.3	79.5	72.5	65.7	98.8	91.3	89.2
											-			
	Inlet 1	372	1.39	65.4	50.7	63	64.8	67.9	61.7	68.7	53.8	78.4	76.4	74.3
	Inlet 2	275	1.67	64.9	54.1	64	62.8	66.9	61.0	67.4	52	78	75.1	73.0
5	Inlet 3	206	1.83	70.1	51.8	59.8	60.9	65.6	59.4	61.1	49.1	78.8	73.4	71.3
RPM	Inlet 4	137	1.98	67.4	50.2	58.8	59.3	64.3	58.0	59.6	47.5	78.6	72.6	70.5
1725	Outlet 1	372	1.39	66.2	68.1	77.4	72.1	71.7	66.7	62.0	55.6	84.2	80.3	78.3
	Outlet 2	275	1.67	69.4	70.5	76.5	70.0	70.6	65.1	60.2	53.7	83.9	78.8	76.7
	Outlet 3	206	1.83	73.4	70.0	73.5	68.1	69.6	64.5	58.4	51.9	84.3	77.3	75.2
	Outlet 4	137	1.98	73.9	66.5	71.2	66.9	68.2	64.4	57.5	50.6	83.8	76.2	74.2


Property rights to all drawings, details, representations, ideas, data, notes and specifications either copies or originals thereof that may be incorporated into the design and/or project are the property solely of Plastec ventilation, inc. Permission for any copies of said copyrighted materials, drawings, details, representations, ideas, data, notes and specifications either originals or copies thereof to be made, coped or altered by any person, business, or corporation may only be authorized with the expressed written permission of Plastec ventilation, inc. By the use of this data, the user acknowledges that he/she has read and understand all of the notes included herein.

+1 (941) 751-7596





Expanded View

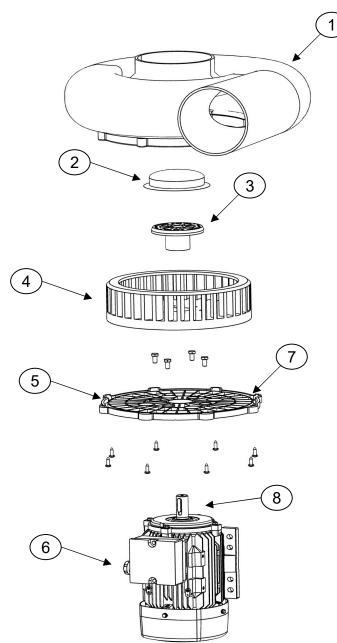

1	Housing
2	Hub Cap
3	Hub
4	Impeller
5	Motor Plate
6	Motor
7	Motor Plate Seal
8	Shaft Key