




NEOPRENE VIBRATION ISOLATOR

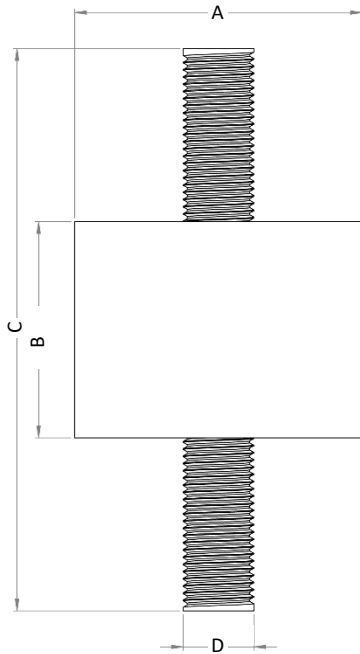

Model Number	A mm (in)	B mm (in)	C mm (in)	D mm	Compression		Shear	
					Load Kg (Lbs)	Deflection mm (in)	Load kg (Lbs)	Deflection mm (in)
VI4S	20 (0.79)	25 (0.98)	55 (2.16)	M6	25 (55)	5.0±1.0 (0.2)	2.5 (5.5)	5.0±1.0 (0.2)
VI4M	25 (0.98)	25 (0.98)	65 (2.56)	M8	40 (88)	5.0±1.0 (0.2)	6 (13)	5.0±1.0 (0.2)
VI4L	40 (1.57)	28 (1.1)	78 (3)	M10	100 (220)	5.5±1.0 (0.2)	16 (35)	5.5±1.0 (0.2)

FEATURES

Manufactured of rubber. Mounting hardware made of stainless steel and clear zinc plated threads. Temperature recommended up to 140°F.

- Installed between motor feet and support stand or weather hood/pedestal system.
- Absorbs vibrations, reduces noise, reduces structural damage.
- Color: Black
- Pack Content: 4 pcs
- Material: Rubber + Zinc plated Steel
- Compression mounting only

Project Name	
Date	
Engineer / Sales Rep	
Client	
Contractor	

Property rights to all drawings, details, representations, ideas, data, notes and specifications either copies or originals thereof that may be incorporated into the design and/or project are the property solely of Plastec Ventilation, Inc. Permission for any copies of said copyrighted materials, drawings, details, representations, ideas, data, notes and specifications either originals or copies thereof to be made, copied or altered by any person, business, or corporation may only be authorized with the expressed written permission of Plastec Ventilation, Inc. By the use of this data, the user acknowledges that he/she has read and understand all of the notes included herein.