

2409YNH / 2409CNH
24-inch High Brightness Monitor



Getting Started

■ Connecting 2409YNH / 2049CNH .² Your Device

1. Plug in the waterproof VGA and/or HDMI cable and connect to your device.
2. Plug the USB waterproof cable (2049CNH Only) and connect to your device for the touchscreen control function.



Waterproof Connectors



VGA cable/ HDMI cable/ USB cable

■ Turning On 2409YHN / 2049CNH

1. Plug the waterproof power cable, right side is [+], left side is [-].



Waterproof Power Connector




Power cord/ Power adapter with waterproof caconnector

2. Connect the AC/DC adapter to the power cord.
3. Plug the power cord to an electrical outlet (AC100~240V input).
4. The monitor will start automatically after it be powered up and the LED of keypad will turn light.



Operation Instruction

■ OSD Buttons

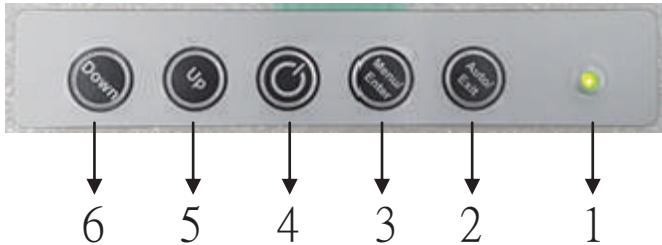

1. Power LED Light: Green Light o gcpu'uki pcn'ku'f ggevgf ;
Orange Light'o gcpu'pq"signal or qw'qh'tcpi g.
2. Auto/Exit : a. Choose the input signal source.
b. Adjust the display to the best position.
c. Exit the options.
3. Menu/Enter : a. Qr gp the QUF 'Menu.
b. Enter the options.
4. On/Off : Press the button to turn on/off the display.
5. Up : Press the button to adjust the increasing value of
selected OSD control option."J qvng{ 'vq"kpctgcug'Dt ki j vpguu0
6. Down : Press the button to adjust the decreasing value of
selected OSD control option."J qvMg{ 'vq'f getgcug'Dt ki j vpguu0