

Thermoelectric cooler TG 3050-24V Recessed



Product Features

Brand Name: SoliTherm Peltier

Order Number: 3050303

Housing Material: Stainless steel AISI 304 (V2A)

Ingress protection: IP 66, Type 4X

Note: The torque for the mounting nuts should be 4.5 Nm.

Approvals: CE, cURus

Accessories:



Temperature controller (heating / cooling)



Electronic thermostat (cooling)



Condensate Kit



Wall Mounting Kit


Taric Code: 84158300

Technical data TG 3050-24V Recessed

Cooling capacity 95F/95F:	170 BTU
Temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 37 / 100 cfm Cabinet air circuit: 13 / 42 cfm
Mounting:	Recessed
Dimension H x W x D:	8.1 x 6.1 x 5.3 inch
Weight:	7 lbs.
Cut out dimensions:	6.69 x 4.72 in.
Voltage / Frequency:	24 V DC (use NEC Class 2 supply)
Current 95F95F:	2.4 A
Starting current:	3.7 A
Max. current:	2.5 A
Nominal power 95F95F:	57.6 W
Max. power:	60 W
Fuse:	4 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Thermoelectric coolers](#)

Performance Graph:

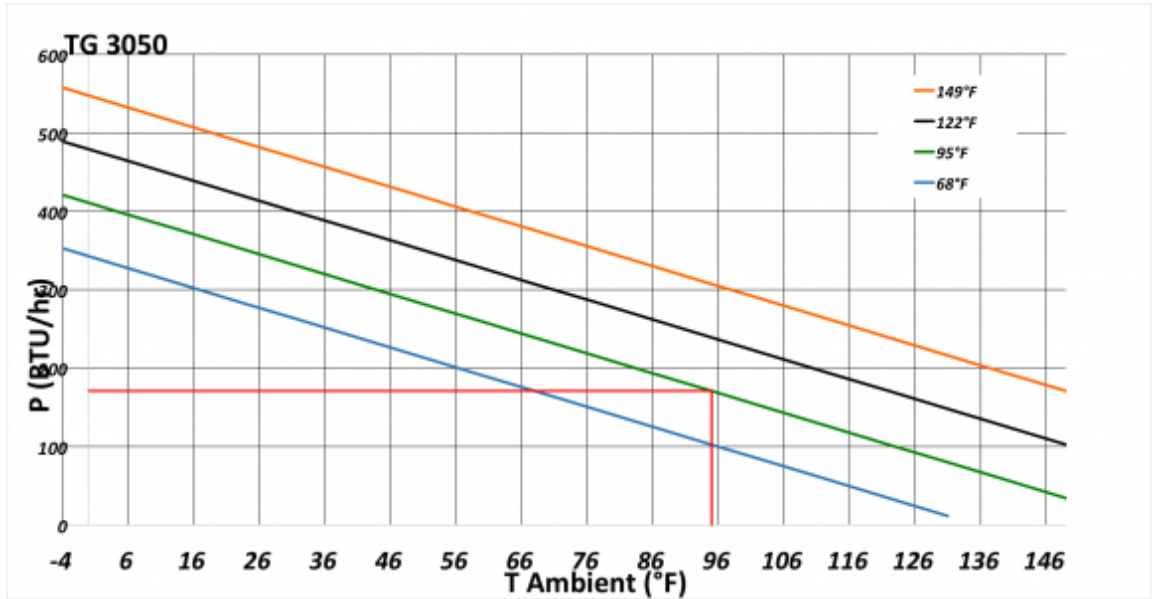


click image to enlarge

Air flow:

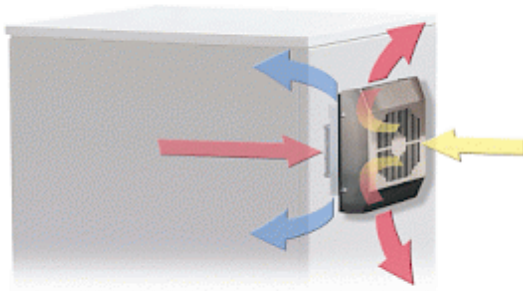

click image to enlarge

Cut out dimensions:

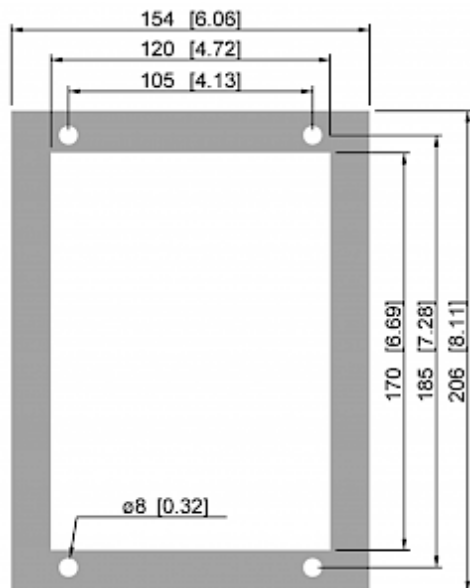

click image to enlarge

Product Accessories:



[click image to enlarge](#)