

Thermoelectric cooler TG 3102-24V Recessed



Product Features

Brand Name: SoliTherm Peltier

Order Number: 3102303

Housing Material: Stainless steel AISI 304 (V2A)

Ingress protection: IP 66, Type 4X

Note: The torque for the mounting nuts should be 4.5 Nm.

Approvals: CE, cURus, RoHS

Accessories:



Temperature controller (heating / cooling)



Electronic thermostat (cooling)



Condensate kit



Wall Mounting Kit


Taric Code: 84158300

Technical data TG 3102-24V Recessed

Cooling capacity 95F/95F:	340 BTU
Temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 75 / 125 cfm Cabinet air circuit: 27 / 53 cfm
Mounting:	Recessed
Dimension H x W x D:	7.9 x 12 x 5.4 inch
Weight:	13 lbs.
Cut out dimensions:	10.24 x 6.30 in.
Voltage / Frequency:	24 V DC
Current 95F95F:	4.8 A
Starting current:	7.4 A
Max. current:	4.9 A
Nominal power 95F95F:	115 W
Max. power:	118 W
Fuse:	8 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Thermoelectric coolers](#)

Performance Graph:

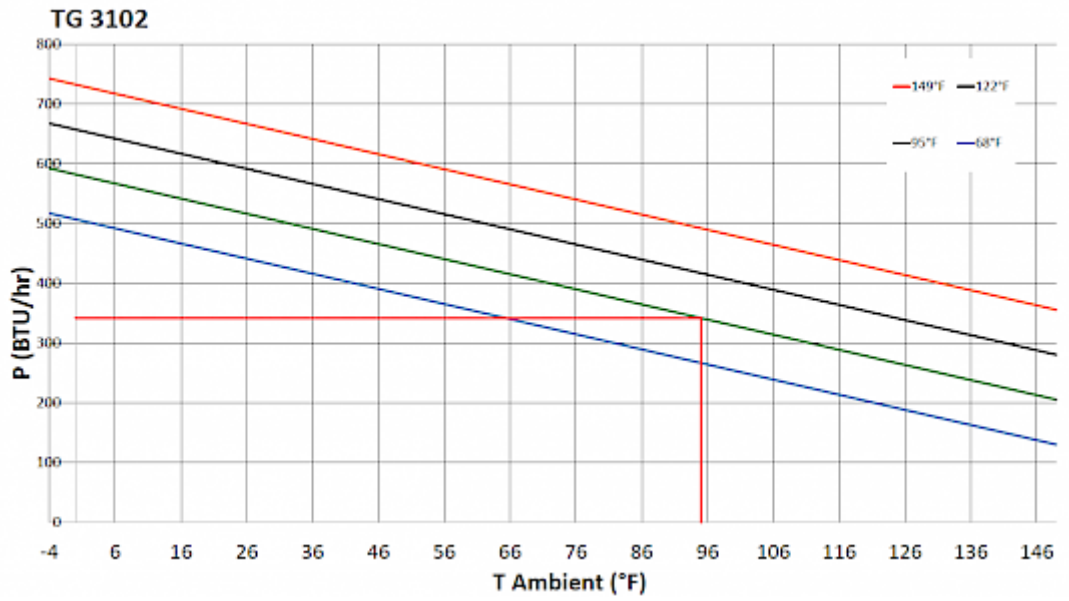


[click image to enlarge](#)

Air flow:

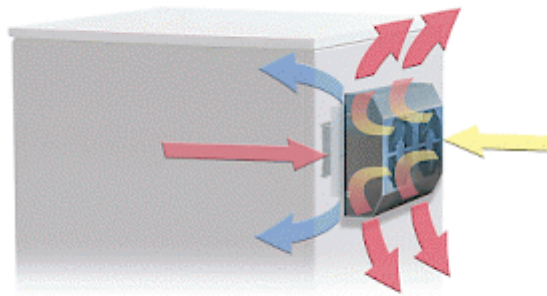

[click image to enlarge](#)

Cut out dimensions:

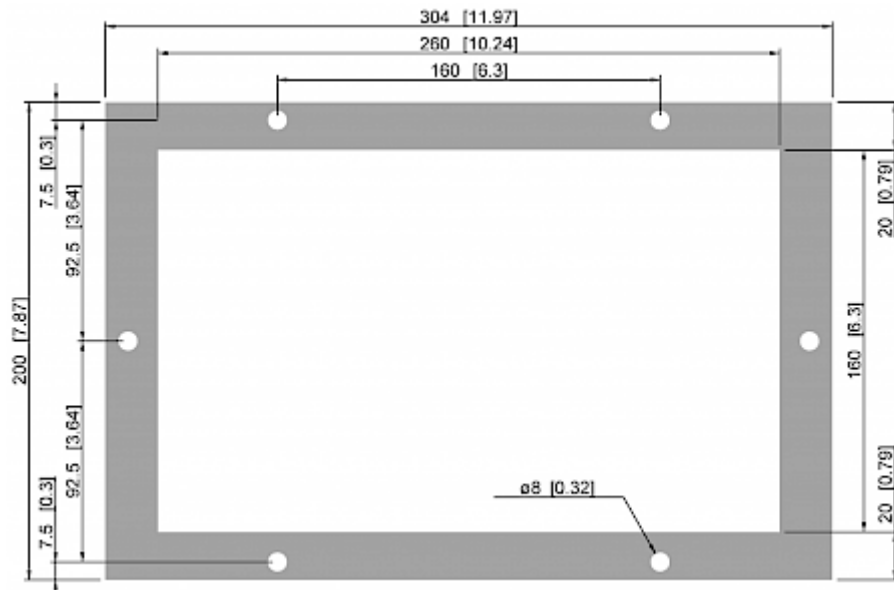

[click image to enlarge](#)

Product Accessories:



[click image to enlarge](#)