

Thermoelectric cooler TG 3200-24V Recessed



Product Features

Brand Name: SoliTherm Peltier

Order Number: 3200303

Housing Material: Stainless steel AISI 304 (V2A)

Ingress protection: IP 66, Type 4X

Note: The torque for the mounting nuts should be 4.5 Nm.

Approvals: CE, RoHS, cURus

Accessories:



Temperature controller (heating / cooling)



Electronic thermostat



Condensate kit



Wall Mounting Kit


Taric Code: 84158300

Technical data TG 3200-24V Recessed

| | |
|--|--|
| Cooling capacity 95F/95F: | 680 BTU |
| Temperature range: | -4°F - 149°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 70 / 153 cfm Cabinet air circuit: 70 / 153 cfm |
| Mounting: | Recessed |
| Dimension H x W x D: | 15.7 x 7.1 x 6.7 inch |
| Weight: | 22 lbs. |
| Cut out dimensions: | 14.6 x 6.1 inch |
| Voltage / Frequency: | 24 V DC |
| Current 95F95F: | 10.8 A |
| Starting current: | 17 A |
| Max. current: | 11.6 A |
| Nominal power 95F95F: | 260 W |
| Max. power: | 280 W |
| Fuse: | 16 A (T) |
| Connection: | Connection terminal block |


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Thermoelectric coolers](#)

Performance Graph:

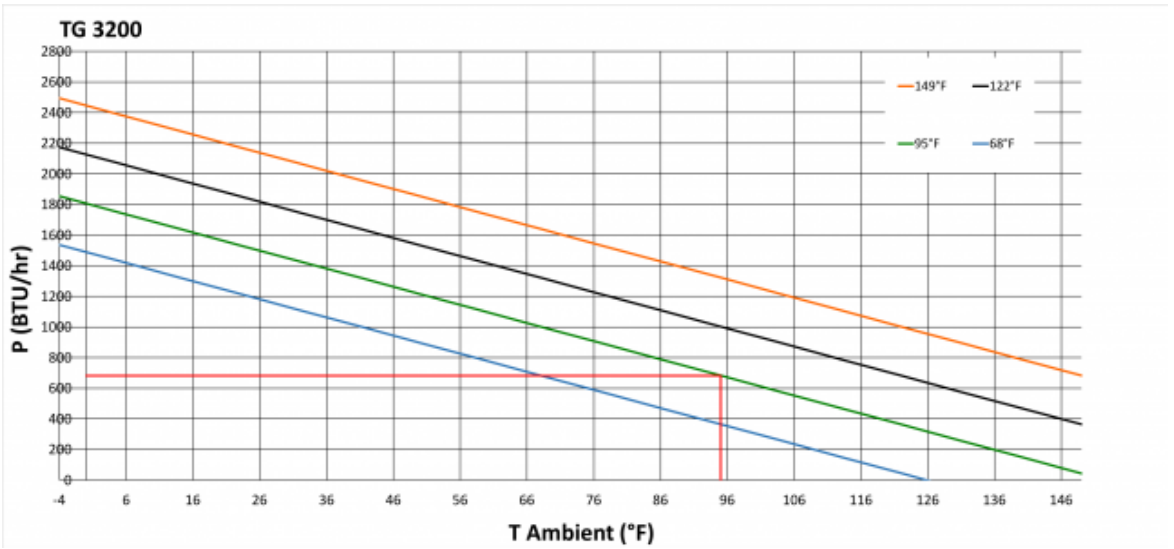


click image to enlarge

Air flow:

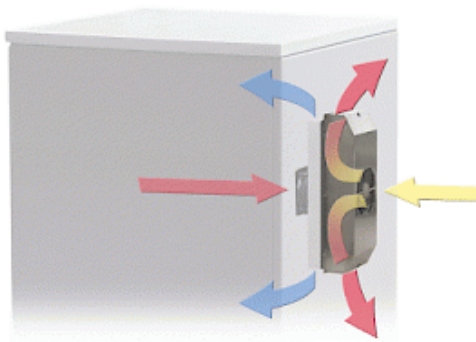

click image to enlarge

Cut out dimensions:

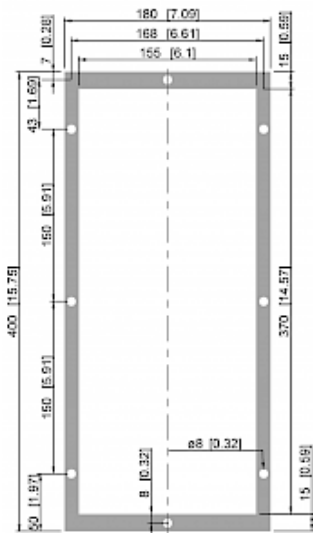

click image to enlarge

Product Accessories:



[click image to enlarge](#)