

Thermoelectric cooler TG 6405-230V Recessed



Product Features


Brand Name:	SoliTherm Peltier
Order Number:	6405303
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 66, Type 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus, RoHS
Accessories:	Condensate Kit Wall Mounting Kit
Taric Code:	84158300

Technical data TG 6405-230V Recessed

Cooling capacity 95F/95F:	1370 BTU
Temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 141 / 191 cfm Cabinet air circuit: 141 / 191 cfm
Mounting:	Recessed
Dimension H x W x D:	23.6 x 17 x 8 inch
Weight:	75 lbs.
Cut out dimensions:	15 x 21.6 inch
Voltage / Frequency:	120 - 230 V ~ 50/60 Hz
Current 95F95F:	3.9 A @ 120 V 2.0 A @ 230 V
Starting current:	5.8 A @ 120 V 3.0 A @ 230 V
Max. current:	4.0 A @ 120 V 2.1 A @ 230 V
Nominal power 95F95F:	460 W
Max. power:	480 W
Fuse:	6 A (T) @ 120 V 4 A (T) @ 230 V
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Thermoelectric coolers](#)

Performance Graph:

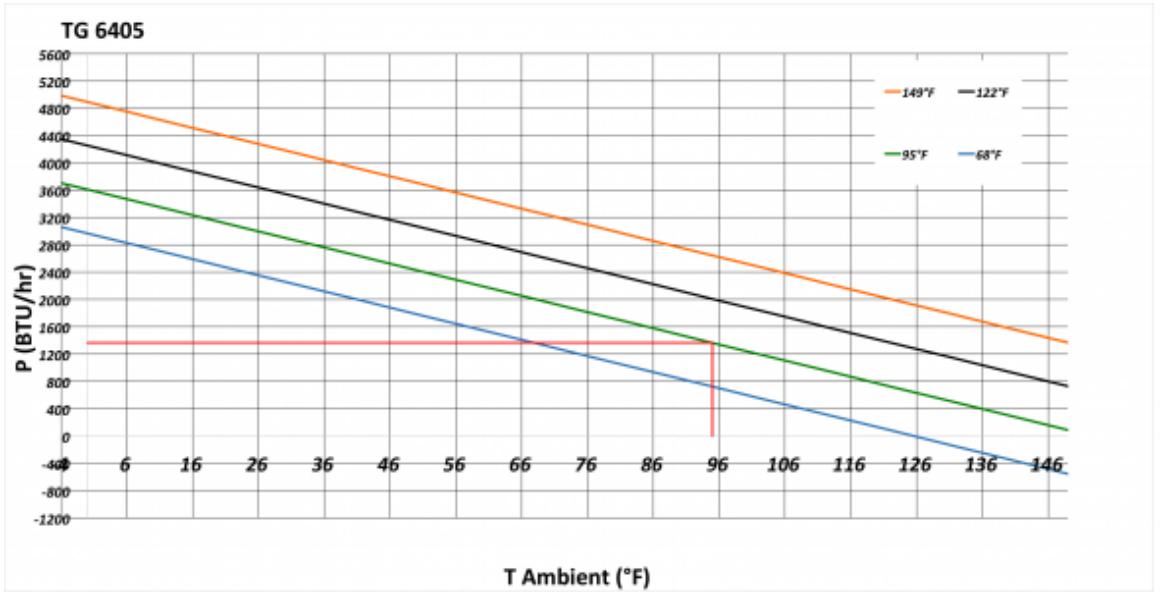

click image to enlarge

Cut out dimensions:

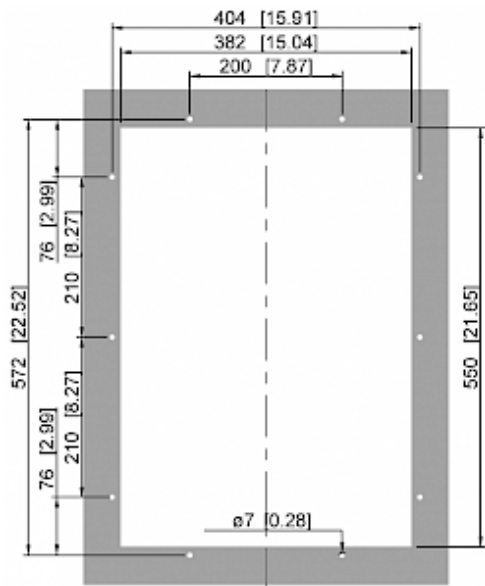

click image to enlarge