

## Thermoelectric cooler TG 6805-230V Recessed



### Product Features


<b>Brand Name:</b>	SoliTherm Peltier
<b>Order Number:</b>	6805303
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	IP 66, Type 4X
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus, RoHS
	<a href="#">Condensate Kit</a>
<b>Accessories:</b>	<a href="#">Wall Mounting Kit</a>
<b>Taric Code:</b>	84158300

## Technical data TG 6805-230V Recessed

<b>Cooling capacity 95F/95F:</b>	2730 BTU
<b>Temperature range:</b>	-4°F - 149°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 280 / 383 cfm Cabinet air circuit: 280 / 383 cfm
<b>Mounting:</b>	recessed
<b>Dimension H x W x D:</b>	38.3 x 20.2 x 8.3 inch
<b>Weight:</b>	146 lbs.
<b>Cut out dimensions:</b>	18.3 x 36.3 inch
<b>Voltage / Frequency:</b>	120 - 230 V ~ 50/60 Hz
<b>Current 95F95F:</b>	7.7 A @ 120 V 4.0 A @ 230 V
<b>Starting current:</b>	11.6 A @ 120 V 6.0 A @ 230 V
<b>Max. current:</b>	8.0 A @ 120 V 4.2 A @ 230 V
<b>Nominal power 95F95F:</b>	930 W
<b>Max. power:</b>	960 W
<b>Fuse:</b>	12 A (T) @ 120 V 7 A (T) @ 230 V
<b>Connection:</b>	Connection terminal block


Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).  
 > [Overview product group Thermoelectric coolers](#)

**Performance Graph:**

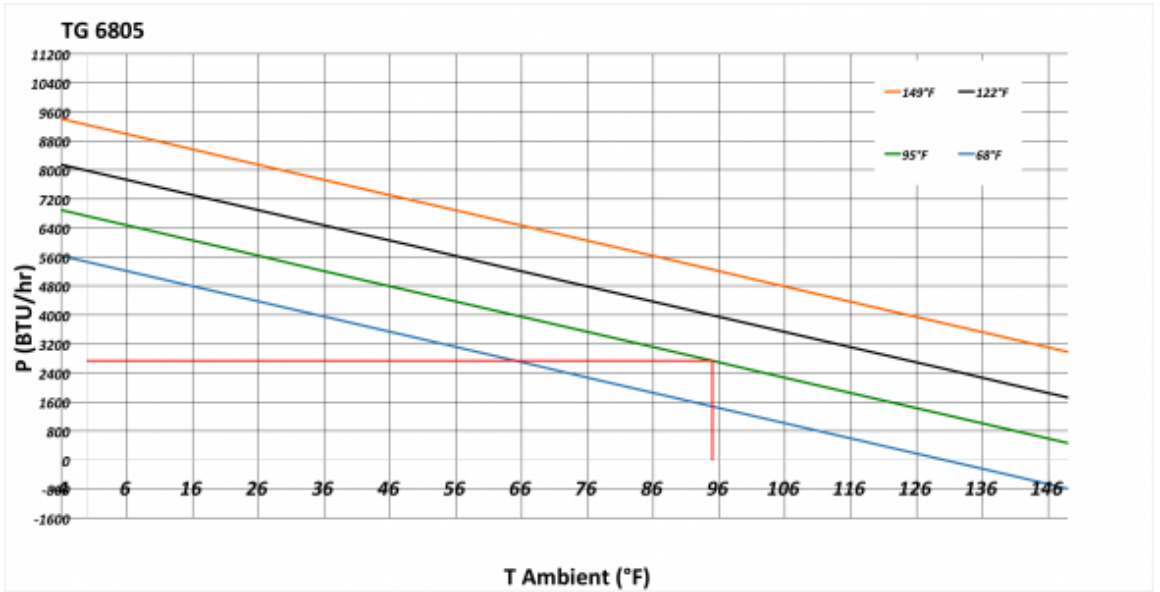

click image to enlarge

**Cut out dimensions:**

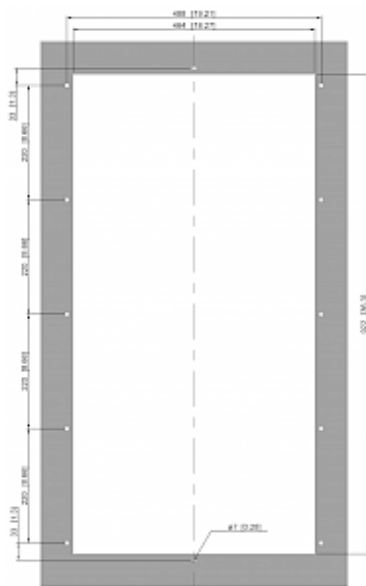

click image to enlarge