

LMP-1802G-SFP Series

18-Port Industrial Gigabit Managed Ethernet Switch, with 16*10/100/1000Tx Ports (30W/Port) and 2*100/1000 SFP Slots; 48~55VDC Power Input



Features


- ▶ Supports 16*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port
- ▶ Supports 2*100/1000 SFP Slots
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Network Broadcast Storm Protection
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ System Warning Setting for Automatic Warning through E-mail
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temperature Range: STD: -10° to 70°C, EOT: -40°C to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' **LMP-1802G-SFP series** is a 18-port industrial Gigabit PoE+ managed Ethernet switch that is embedded with 16*10/100/1000Tx Ethernet ports that support IEEE 802.3at/af for a maximum of 30W/port and 2*100/1000 SFP slots. The LMP-1802G-SFP series is a fully manageable Layer 3 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-1802G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

DIMENSIONS

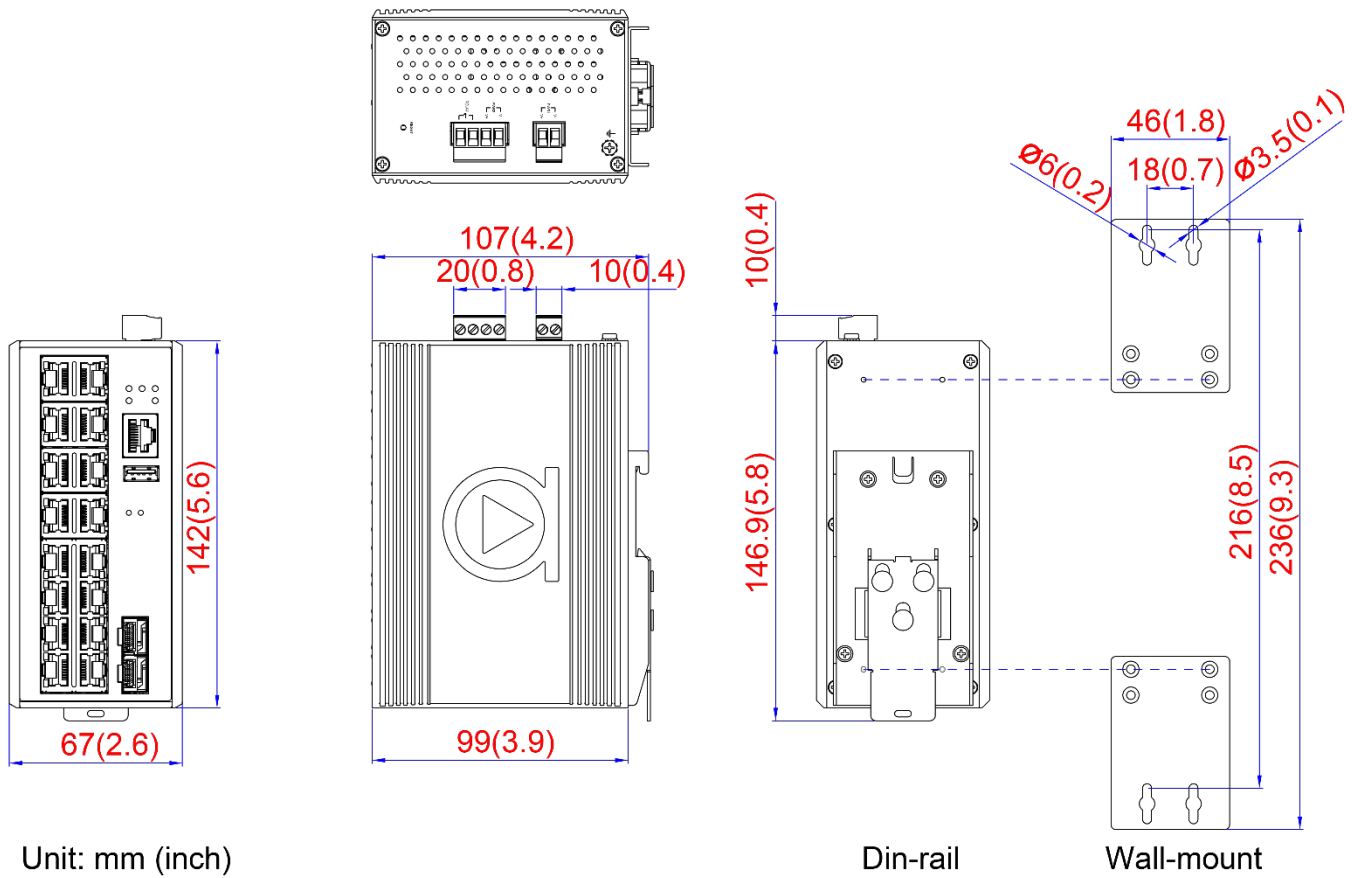

Unit: mm (inch)

Din-rail

Wall-mount

SPECIFICATIONS

Technology		IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000Tx Gigabit Ethernet IEEE 802.3z Gigabit Fiber IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
Standards		
Switch Properties		
Protocol	IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6	
Switch Architecture	Back-Plane (Switching Fabric): 24.0Gbps	
Processing Type	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode 14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet	
Transfer Rate		
Packet Buffer	4 Mbits	
Jumbo Frame	9.6K	
MAC Table Size	8K	
VLAN Group	0 ~ 4094	
IGMP Group	Up to 256 Group	
Port Interface		
Ethernet Port	16*10/100BaseTx auto negotiation speed, Full/Half duplex mode, and auto MDI connection	
Fiber Port	2*100/1000 SFP Slots	
Wavelength	Depends on SFP modules	
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8, N, 1	
Configuration Backup	1*USB 2.0	
Protection		
Overload Current Protection	Present	
Power Reverse Polarity	Present (the unit will not be on, if power reverse)	
Network Cable		10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA- 568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA568 100-ohm (100m)
Mechanical Characteristics		
Housing	Metal, IP30 rated	
Dimension	67 x 142 x 99 mm	
Weight	Unit: 2.65 lbs Shipping: 3.09 lbs	
Mounting	DIN-Rail; Wall-mount (optional)	
Power Requirement		
Input Voltage	48~55VDC Redundant Input	
Power Connection	1 removable 4-contact and 2-contact terminal block	
Power Consumption	15 Watts	
Environmental Limits		
Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C	
Storage Temperature	-40°~85°C	
Ambient Relative Humidity	5 to 95%, (non-condensing)	
Regulatory Approvals		
EMI	FCC Class A	
EMS	EN61000-4-2,3,4,5,6,8 EN61000-6-2,4	
Free Fall	IEC60068-2-32	
Shock	IEC60068-2-27	
Vibration	IEC60068-2-6	
Green	RoHS Compliant	
Certifications	FCC, CE, UL 61010-1 (Pending), UL 61010-2-201 (Pending)	
Warranty	5 Years	

ORDERING INFO

LMP-1802G-SFP	18-Port Industrial Gigabit Managed Ethernet Switch, with 16*10/100/1000Tx Ports (30W/Port) and 2*100/1000 SFP Slots; 48~55VDC Power Input
LMP-1802G-SFP-T	18-Port Industrial Gigabit Managed Ethernet Switch, with 16*10/100/1000Tx Ports (30W/Port) and 2*100/1000 SFP Slots; 48~55VDC Power Input; EOT: -40°C to 75°C