

LNP-0702G-SFP Series

7-Port Industrial PoE+ Gigabit Unmanaged Ethernet Switch, with 4*10/100/1000Tx (30W per Port), 1*10/100/1000Tx + 2*100/1000 SFP Slots




Features

- ▶ Supports 4-Port 10/100/1000Tx IEEE 802.3at PoE+ Compliant with 30W per Port, 1-Port 10/100/1000Tx and 2-Port 100/1000 SFP Slots
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 10Gbps Back-Plane (Switching Fabric)
- ▶ 8K MAC Address Table
- ▶ 9.6Kbytes Jumbo Frame Support
- ▶ Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 48~55VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range - STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNP-0702G-SFP series industrial gigabit unmanaged Ethernet switch features five 10/100/1000Tx ports, four of which support IEEE 802.3at high power PoE (30W/Port), and two dual rate 100/1000Fx SFP slots. This product series provides high EFT and ESD protection to protect against unregulated voltage. It also provides wide operation temperature models for standard: -10° to 70°C and extended: -40° to 75°C. The LNP-0702C-SFP series is an ideal solution for harsh environments and industrial applications.

DIMENSIONS

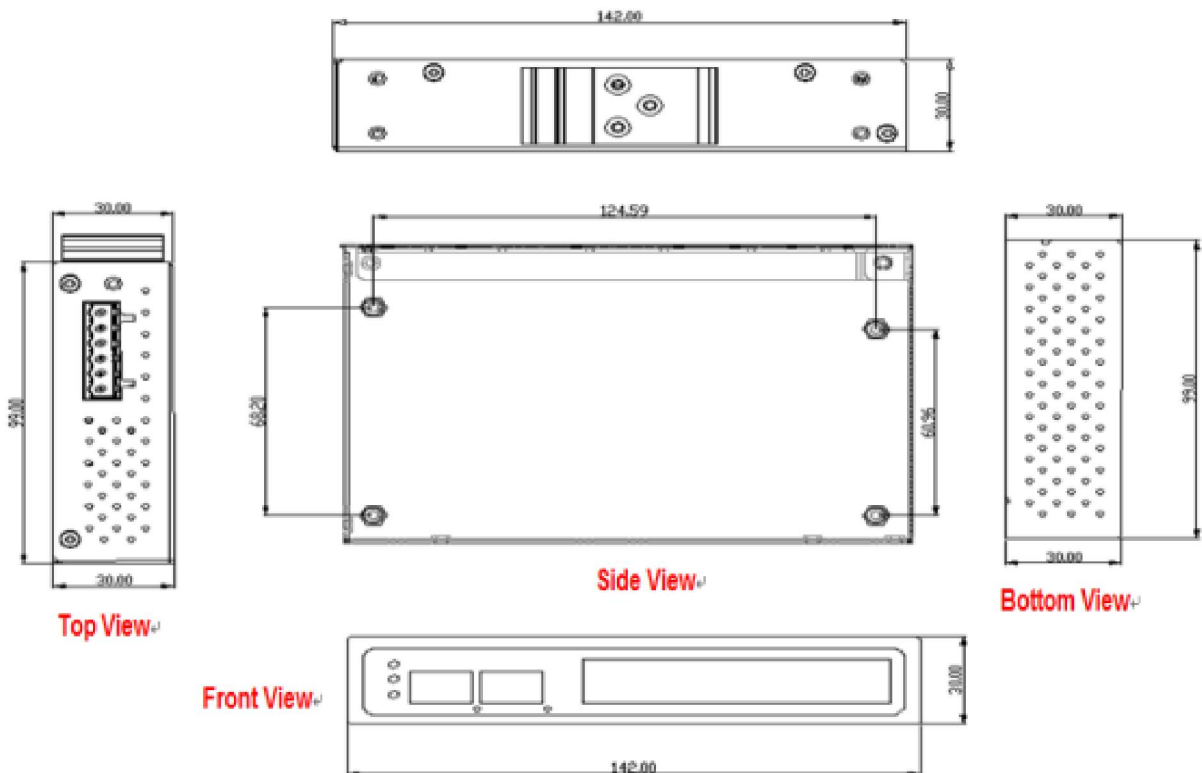

SPECIFICATIONS

Technology		Mechanical Characteristics	
Standards	IEEE 802.3 10BaseTx Ethernet	Housing	Metal, IP30 protection
	IEEE 802.3u 100BaseTx Fast Ethernet	Dimensions	30 x 99 x 142 mm (W*D*H)
	IEEE 802.3ab 1000BaseTx	Weight	Unit 1.3 lb. Shipping Weight 1.7lbs.
	IEEE 802.3z Gigabit Fiber	Mounting	DIN-Rail, Wall mounting (optional)
	IEEE 802.3at PoE+	Environmental Limits	
Processing Type	Store and Forward	Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C
Protocol	CSMA/CD	Storage Temperature	-40°C ~ 85°C
Flow Control	IEEE 802.3x back pressure flow control	Ambient Relative Humidity	5 to 95%, (non-condensing)
Switch Properties		Regulatory Approvals	
Switch Architecture	10Gbps Back-Plane (Switching Fabric) 14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port	EMI	FCC Class A
Transfer Rate		EMS	EN61000-4-2,3,4,5,6,8,11,12 EN61000-6-2,4
Jumbo Frame	9.6Kbytes	Free Fall	IEC60068-2-32
MAC Table Size	8K	Shock	IEC60068-2-27
Interface		Vibration	IEC60068-2-6
Ethernet Port	5*RJ45 Ports w/ 4*10/100/1000Tx (PSE 30W/Port), and 1*10/100/1000Tx	Green	RoHS Compliant
Fiber Port	2*100/1000 SFP Slot	Certifications	FCC, CE, UL 61010-1, UL 61010-2-201, UL Class 1 Division 2, ISA 12.12.01
PoE Pin out	V+, V+, V-, V- for pins 1,2,3,6 Endspan, MDI Alternative A	Warranty	5 Years
Network Cable	10Base Tx: 2-pair UTP/STP Cat. 3,4,5 100Base Tx: 2-pair UTP/STP Cat. 5 1000Base Tx: 2-pair UTP/STP Cat. 5/5E		
Power Requirements			
Input Voltage	48~55VDC, Redundant Input		
Overload Current Protection	Present		
Connection	1 removable 6-contact terminal block		
Reverse Polarity Protection	Yes		
Power Consumption	110 Watts @ 48V 130 Watts @ 51-55V (Full Load)		

ORDERING INFO

LNP-0702G-SFP	7-Port Industrial PoE+ Gigabit Unmanaged Ethernet Switch, w/ 4*10/100/1000Tx (30W/Port), 1*10/100/1000Tx + 2*100/1000 SFP Slot
LNP-0702G-SFP-T	7-Port Industrial Gigabit Unmanaged Ethernet Switch, w/ 4*10/100/1000Tx (30W/Port), 1*10/100/1000Tx + 2*100/1000 SFP Slot: EOT: -40° to 75°C

Optional Accessories

DR-75-48	75W Industrial Din Rail Power Supply, 48VDC
DR-120-48	120W Industrial Din Rail Power Supply, 48VDC
MDR-100-48	100W Industrial Single Output Miniature DIN Rail Power Supply, 48VDC
SDR-240-48	240W Industrial Slim & High Efficiency DIN Rail Power Supply with PFC Function, 48VDC