

## UW88



### UW88 | INTEGRATED ENCLOSURE

DYNICS UW88 is an Ultra-Wide 88" Display that can be integrated PC. It is built into a secure IP50 metal enclosure. Available as a single or double-sided configuration with one or two module computers (XiS or XiR).

- Ultra-Wide 3840 x 1080 Resolution
- 100~240VAC (3-Pin Entry)
- Optional Wi-Fi
- Optional Soundbar

### DISPLAY SPECIFICATIONS

<b>SIZE</b>	<b>88" (Diagonal)</b>
<b>RESOLUTION</b>	3840 x 1080 pixels
<b>VIEW ANGLE</b>	H: -89°/+89°, V: -89°/+89°
<b>CONTRAST</b>	1100:1
<b>BRIGHTNESS</b>	500 nits
<b>ASPECT RATIO</b>	32:9
<b>LENS</b>	Protective Polycarbonate Lens (Non-Touch)
<b>LCD LIFE</b>	50,000 Hour Backlight Half-Life
<b>ENCLOSURE</b>	Steel Enclosure with Powder Coat Finish


### DIMENSIONS, WEIGHT AND POWER CONSUMPTION

SIZE	88" SINGLE	88" DOUBLE
<b>HEIGHT</b>	26.55" (674.4mm)	26.55" (674.4mm)
<b>WIDTH</b>	88.66" (2251.9mm)	88.66" (2251.9mm)
<b>DEPTH</b>	18.89" (479.7mm)	25.77" (654.5mm)
<b>WEIGHT</b>	170 lbs.*	340 lbs.*
<b>POWER CONSUMPTION</b>	284 Watts**	544 Watts**

### OPTIONAL SOUNDBAR (105dB Max)



### DOUBLE-SIDED CONFIGURATION

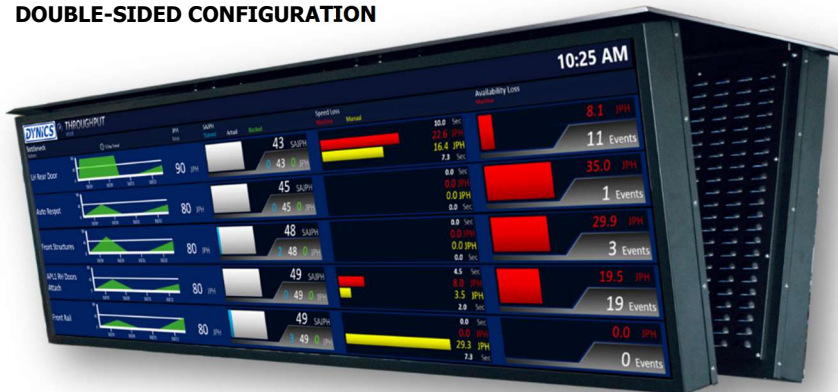

### MODULAR PC CONFIGURATION XiS or XiR2/XiR4 PCs

<http://dynics.net/documents/XiS.pdf>  
<http://dynics.net/documents/XiR.pdf>




## UW88



### MECHANICAL DRAWINGS (SINGLE UNIT)


**FRONT VIEW**

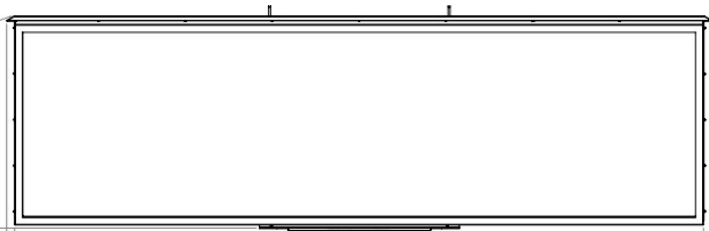


**BOTTOM VIEW**



**SIDE VIEW**

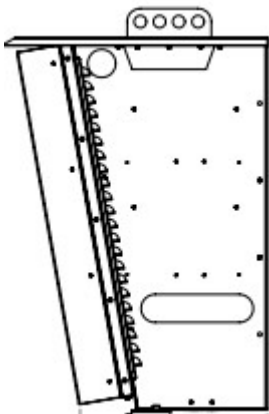

**POWER ENTRY (3-Pin) 100~240VAC**



- 1 GROUND
- 2 LINE
- 3 NEUTRAL

All measurements are in inches and pounds, unless noted. Pictures and drawings are not to scale. Estimated weight may change depending on options. DYNICS Reserves the right to change, modify, upgrade, or discontinue any part of this datasheet without any prior notice.

