

JSmart715M | Web HMI Tech-Note

Web HMI 15" TFT, PCAP Touch, 8GB Flash, PoE Ethernet, Wi-Fi, NFC, Web Browser

- Chromium based HTML5 Browser
- Easy to use browser setting application
- 15 inch PCAP display, Resolution 1366x768 pixel
- PCAP Touchscreen Multitouch
- 10/100 Ethernet port PoE
- Wi-Fi Connection and NFC Device
- Full IP protection; ideal for mounting-arm installation
- Operating temperature -20°C to +55°C
- UL 61010-1 approval
- Dedicated HMI support arm system
- Includes environment and motion sensors





Highlights

JSmart715M Web HMI excels in all IoT edge applications in industrial, ship and building automation where a powerful HTML5 web browser and devices that can operate in critical areas are required.




The special features of web based HMI JSmart715M are the sleek and elegant design, the 15 inch multi-touch capacitive touchscreen display with robust glass front, and the ability to connect the device via a single Power-over-Ethernet (PoE) cable. This technology allows maximum flexibility and efficiency in installation as well as full IP67 protection with the use of appropriate accessories and connectors.

The Wi-Fi interface improves the integration capability of the device while NFC expands the possible applications. JSmart715M Web include a Chromium-based HTML5 browser that supports kiosk mode operation and support Corvina Cloud secure connectivity.

JSmart715M | Web HMI - Technical Data Preliminary

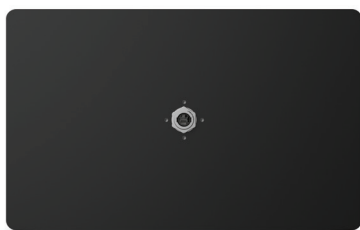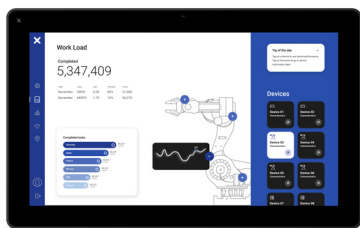

System Resources	
Display - Colors	15.6" TFT - 16M
Resolution	1366x768
Brightness	400 cd/m ²
Dimming	Yes
Touchscreen	Projected Capacitive, Multitouch
CPU	64-bit RISC Quad core - 1.6 GHz
Operating System	Linux
Flash	8 GB
RAM	2 GB
Real Time Clock, RTC Back-up	Yes
Interface	
Ethernet port	10/100 PoE
USB port	1 (Host V2.0, max. 500 mA, available with special cable))
LED	1 RGB
Sensors	Temperature, 3-Axis Accelerometer
Buzzer	Yes
NFC	ISO/IEC 14443A
Wi-Fi	IEEE 802.11a/b/g
Ratings	
Power supply	IEEE 802.3at PoE+
Power Consumption	23W max.
Battery	Rechargeable Lithium battery, not user-replaceable
Environment Conditions	
Operating Temperature	-20° to +55° C (vertical installation)
Storage Temperature	-30°C to +80°C
Operating / Storage Humidity	5-85% RH, non-condensing
Protection Class	IP67 (requires appropriate accessories and cables) - Type: 1, 12, 4x
Dimensions and Weights	
Faceplate LxH	398.6x248 mm (15.69x 9.76")
Depth D+T	26.5 mm (1.04")
Weight	4.0 Kg
Approvals	
CE	Radio Equipment Directive 2014/53/EU (RED)
UL	cULus: UL61010-1 / UL61010-2-201
UL	cULus: Class 1 Div 2
RCM	Yes

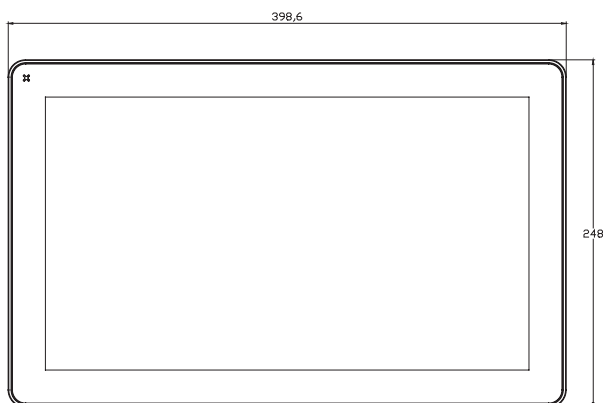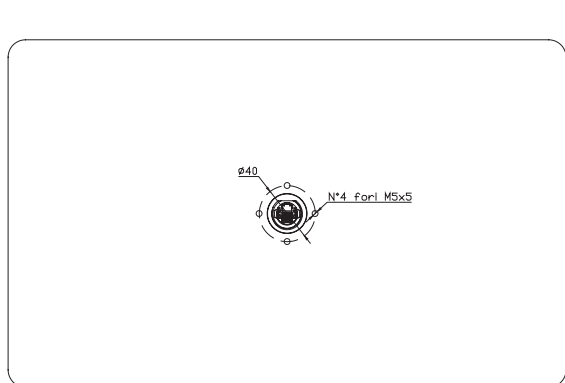

Ordering Information

Model	Part Number	Description
JSmart715M Web	+JS715GD2U5PW	Web HMI 15.6" TFT, 1366x768, PCAP Touch, 8GB Flash memory, PoE Ethernet, Wi-Fi, NFC, Web Browser