



## RS3 Grille Installation Instructions

\*Bumper should be removed at this point

1. We recommend laying the bumper with the front facing down for working purposes
2. Begin by removing the lower splitter. There is one T25 torx in the middle and one on either side. Remove the plastic end pieces. Once these three screws are out, remove the piece starting at sides and working toward the middle.






3. With this piece removed, you will now remove the lower air dam. First remove the phillips screws holding it in, then gently unsnap the piece from the bumper. These screws will not be re-used on the new grille, so store them somewhere safe.



4. You are now ready to remove the OEM grille. There are 6 T25 screws holding the OEM grille in (3 on either side). Remove these, then gently unsnap the grille from the bumper. We recommend unsnapping the bottom portion, then moving to each of the sides. It should look like the following picture when you are finished. Use this picture for reference when unsnapping the tabs.

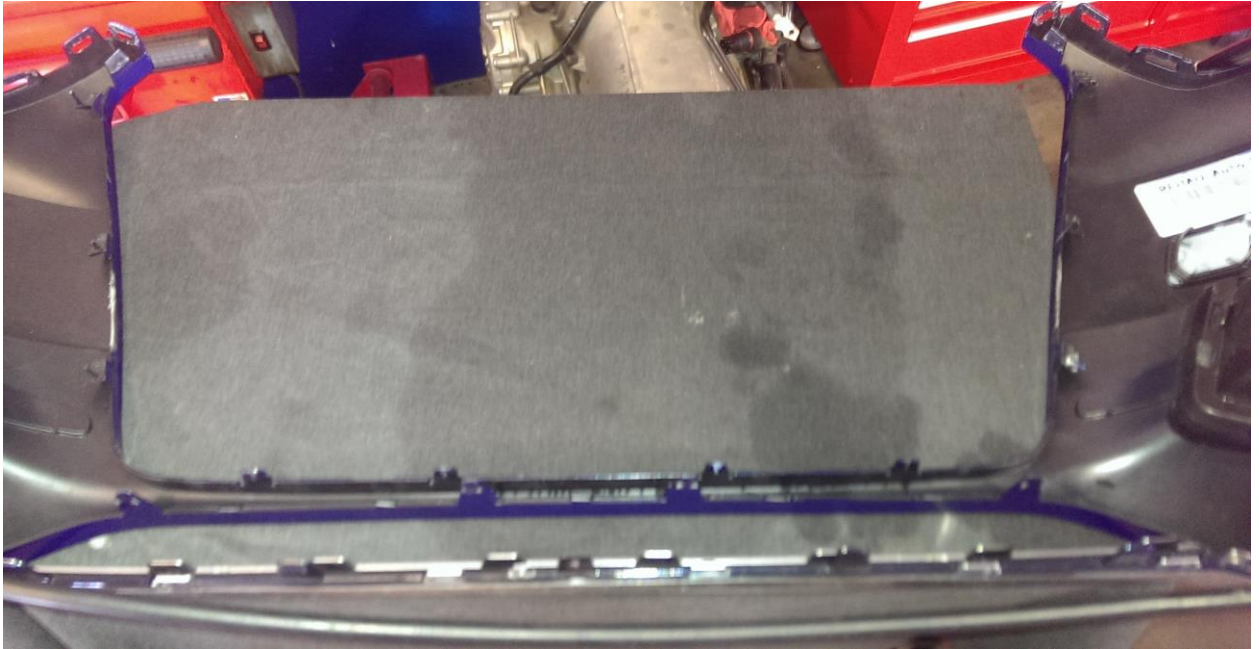

5. Installation is the reverse of removal, and the new grille will snap into the same tabs. There are also clips to mount the washer line. For those with park distance sensors, we recommend installing and starting the car before you bolt down the front bumper to ensure that the sensors are mounted properly so as not to cause false reads. Some users have reported removing the o-ring on the sensor to allow it to seat further into the grille.