Recovery / Adventure

STINGER + SERIES



Upgrading our base Stinger™ with Synthetic rope and our exclusive DUO wireless remote control.

UPGRADED MOTOR

Fatter copper windings deliver more power with ease and cool faster.



UPGRADED DRIVE

Extruded, large-diameter drive spline complements ultra-high motor torque **UPGRADED ROPE**

High-Visibililty Synthetic rope makes rigging fast and easy

UPGRADED ELECTRONICS

Features our top-shelf solenoid plus

NOVAWINCH







High-Vis Yellow Rope



Wireless Control



Compact Design




Top-Shelf Electronics



Safe Pull & **Turn Clutch**

MORE AT NOVAWINCH.NZ



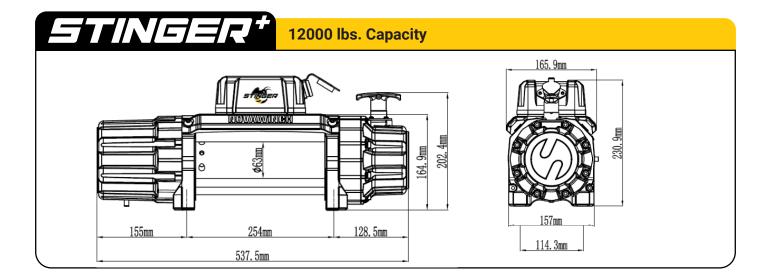

Specifications				
Rated Line Pull	12000 lbs (5443 kg)			
Voltage	12V DC			
Motor	DC 12v 7.3hp (5.5kW)			
Gear Train	3-Stage Planetary			
Gear Ratio	196:1			
Clutch	Pull & Turn			
Braking Action	Mechanical, Auto Load Holding			
Synthetic Rope	3/8"x85.3' (9.2mmx26m)			
Fairlead	4-Way Roller Aluminum Hawse			
Drum Size	2.48" x8.8" (63mm x 244mm)			
Winch Dimensions	21.257" x 6.49" x9.05" (540x165x230mm)			
Mounting Bolt Pattern	10" x 4.5" (254mm x 114.3mm)			
Remote	Wireless/Wired DUO, 12' (3.4m)			
Weight	68.2 lbs (30.9 kgs)			

Performance					
Line Pull		Line Speed		Current	
Lbs.	kgs	FPM	MPM	Amps	
0	0	32.8	10	80	
4000	1816	10.8	3.3	210	
6000	2721	8.8	2.7	270	
8000	3629	6.5	2.0	330	
10000	4536	5.5	1.7	385	
12000	5443	3.6	1.1	420	

Novawinch Stinger+ 12,000lb 12-volt electric winch complete with DUO dual wireless and wired remote control.

The Stinger+ winch comes complete with short solenoid enclosure power leads for mounting to the winch tie bars and a remote mount solenoid enclosure kit, including a remote mounting bracket and 800mm enclosure power leads for versatile remote mount placement of the enclosure.

The solenoid enclosure can be remote-mounted or mounted to winch tie bars.







"Everyone deserves a winch this good."



