



# MASTERCoulour CDM-T Elite MW



## CDM-T Elite 315W/930 PGZ18.1CT/12

The medium wattage lighting system that gives superior, longer-lasting white light for both indoor and outdoor use

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing, except for protected versions with PGZX18 cap, which are designed for open luminaires (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Luminous Flux (Rated) (Min)	
Cap-Base	PGZ18 [ PGZ18]	Luminous Flux (Rated) (Nom)	35280 lm
Operating Position	UNIVERSAL [ Any or Universal (U)]	Luminous Flux (Rated) (Nom)	38000 lm
Life to 5% Failures (Nom)	12500 h	Color Designation	Warm White (WW)
Life To 10% Failures (Nom)	16000 h	Lumen Maintenance 12000 h (Nom)	89 %
Life to 50% Failures (Nom)	30000 h	Lumen Maintenance 10000 h (Nom)	90 %
ANSI Code HID	C182/E	Lumen Maintenance 2000 h (Nom)	99 %
Features	na [ Not Applicable]	Lumen Maintenance 20000 h	80 %
Flux measurement reference	Sphere	Lumen Maintenance - 40% Life	89 %
		Lumen Maintenance 5000 h (Nom)	96 %
		Lumen Maintenance - 10% Life	96 %
		Saturated Red (R9)	45
		Design Mean Lumens	33700 lm
		Chromaticity Coordinate X (Nom)	0.434
Light Technical			
Color Code	930 [ CCT of 3000K]		
Luminous Flux (Nom)	38000 lm		

# MASTERC colour CDM-T Elite MW

Chromaticity Coordinate Y (Nom)	0.398
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (Rated) (Min)	112 lm/W
Luminous Efficacy (rated) (Nom)	120 lm/W
Color Rendering Index (Min)	87
Color Rendering Index (Nom)	90

## Operating and Electrical

Power (Nom)	315.9 W
Lamp Current Run-Up (Nom)	4.7 A
Ignition Supply Voltage (Max)	4000 V
Ignition Peak Voltage (Max)	4000 V
Ignition Supply Voltage (Min)	3000 V
Re-Ignition Time (Min) (Max)	10 min
Ignition Time (Max)	3 s
Voltage (Max)	115 V
Voltage (Min)	90 V
Voltage (Nom)	100 V

## Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	1.5 min

## Mechanical and Housing

Bulb Finish	Clear
Overall Length (Max)	7.4 in
Bulb Shape	TMW28 [ TMW 28mm]

## Approval and Application

Energy Efficiency Class	F
Picogram Per Lumen Hour	27.1 pg/lm.h
Mercury (Hg) Content (Max)	28 mg
Energy Consumption kWh/1000 h	316 kWh
EPREL Registration Number	473295

## UV

Pet (Niosh) (Nom)	141 h/500lx
Damage Factor D/fc (Nom)	0.013


## Luminaire Design Requirements

Bulb Temperature (Max)	700 °C
Cap-Base Temperature (Nom)	250 °C
Pinch Temperature (Max)	300 °C

## Product Data

Full product code	871829154801000
Order product name	CDM-T Elite 315W/930 PGZ18.1CT/12
EAN/UPC - Product	8718291548010
Order code	928601164631
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928601164631
Net Weight (Piece)	124.000 g
ILCOS Code	MT-315/30/1A-H-PGZ18

## Dimensional drawing





CDM TMW 315W/930 PGZ18 U

Product	D (max)	D	D	C (max)	C
CDM-T Elite 315W/930 PGZ18.1CT/12	29 mm	1.1 in	28 mm	188 mm	186 mm

# MASTERColour CDM-T Elite MW



## Photometric data

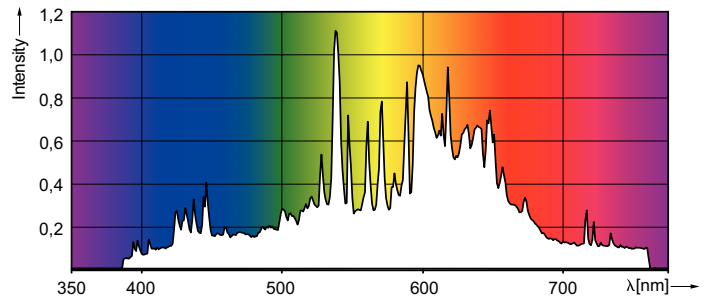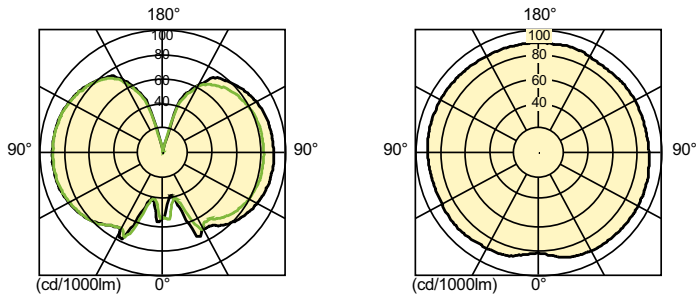

LDLD\_D-CDM-T\_315W\_930--Light distribution diagram

LDPO\_D-CDM-T\_315W\_930-Spectral power distribution Colour

## Lifetime

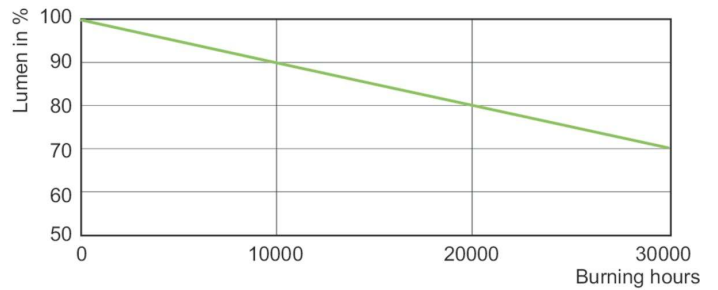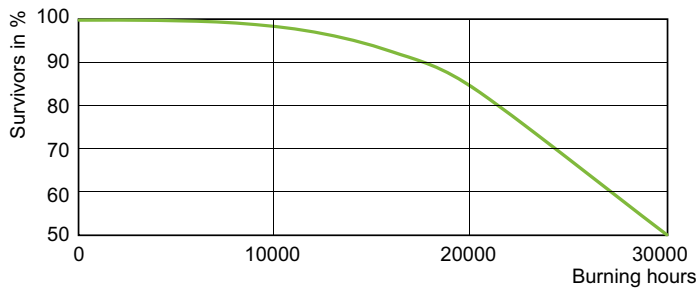

LDLE\_D-CDM-T\_315W\_942\_930-Life expectancy diagram

LDLM\_D-CDM-T\_0001-Lumen maintenance diagram

