



iL5xc

LED Lighting Solution

MODEL: 2.6 WATTS: 330W

VOLTAGE: 100-277V 200-480V


SKU: IL-5xc26FSG-120 IL-5xc26FSG-480

TECHNICAL SPECIFICATIONS


PFF	858 $\mu\text{mol/s}$
Efficacy	2.6 $\mu\text{mol/J}$
Min Power Factor	0.9
THD	< 20%
Crest Factor	0.99
BTU	1128
Rated Voltage	120-277V AC / 347-480V AC
Frequency	50 / 60Hz
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Relative Humidity	98%
Plug Type	Power Cord Sold Separately
Color Temperature	4000k
Color Rendering Index	88
Minimum Mounting Height	6"-12" to top of Canopy
Emitter Cooling	Passive / Extruded Case
Light Distribution +/- 5%	125°
Waterproof Rating	IP65 for Damp/Wet Conditions
LED Lifespan (90% of Life)	55,000+ hours



iL5xc 330W LED SPECTRUM

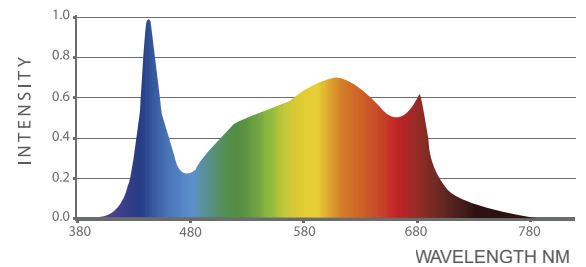

MOUNTING & COVERAGE

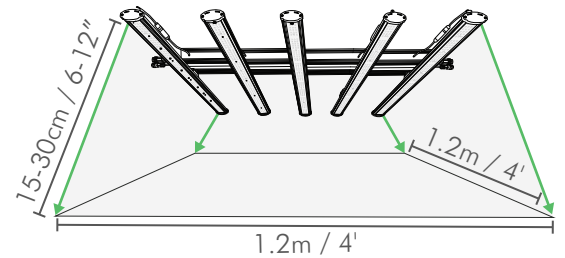

PHYSICAL SPECIFICATIONS

Length	1067mm	42.01"
Width	1003mm	39.49"
Height	129mm	5.08"
Weight	13.5kg	29.76lbs

VOLTAGE AND AMPERAGE

120V	2.85A	341W
208V	1.63A	335W
240V	1.41A	332W
277V	1.22A	330W
347V	0.99A	340W
480V	0.71A	331W

