



# iLi3

LED Lighting Solution

**MODEL:** 2.6


**VOLTAGE:** 100-277V

**WATTS:** 240W


**SKU:** IL-i326FSG-120

## TECHNICAL SPECS


PPF	624 $\mu\text{mol/s}$
Efficacy	2.6 $\mu\text{mol/J}$
Min Power Factor	0.9
THD	15%
Crest Factor	0.99
BTU	816
Rated Voltage	120-277V AC
Frequency	50 / 60Hz
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Relative Humidity	98%
Color Temperature	4000k
Color Rendering Index	88
Minimum Mounting Height	6"-12" to top of Canopy
Emitter Cooling	Passive / Extruded Case
Light Distribution +/- 5%	120°
Waterproof Rating	IP65 for Damp/Wet Conditions
LED Lifespan (90% of Life)	55,000+ hours

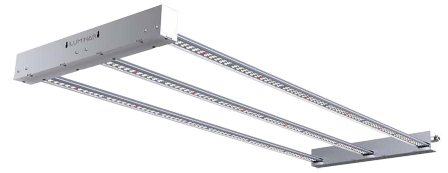

## ILI3 240W LED SPECTRUM

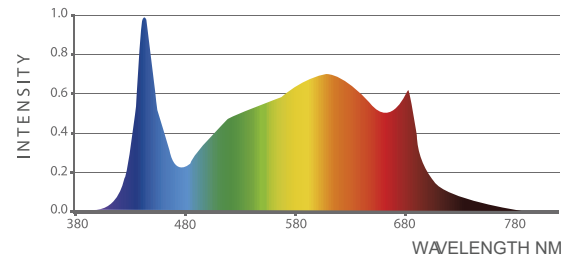

## MOUNTING & COVERAGE

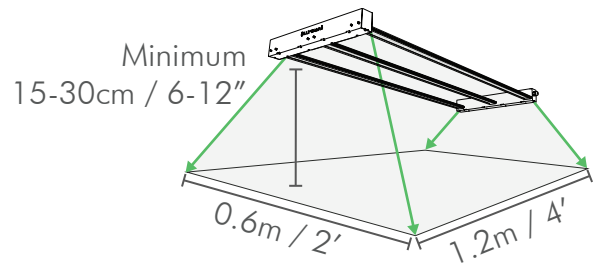


## PHYSICAL SPECIFICATIONS

Length	1193mm	46.97"
Width	458mm	18.04"
Height	50mm	1.97"
Weight	6.6kg	14.6lb

## VOLTAGE AND AMPERAGE

120V	2.11A	251W
208V	1.2A	244W
240V	1.09A	241W
277V	0.9A	240W
347V	0.71A	245W
480V	0.51A	239W

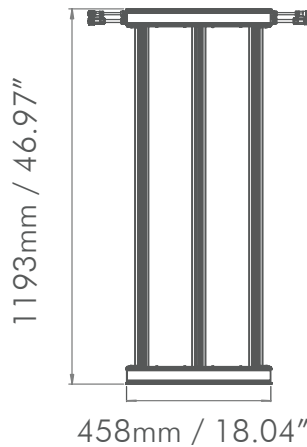

iluminarlighting.com  
Toll Free: 1-877-540-5588

**5 YEAR**  
WARRANTY

© Copyright 2021 ILUMINAR Lighting  
Subject to change without notice.