


PROJECT ANME: \_\_\_\_\_

CATALOG NUMBER: \_\_\_\_\_

NOTES: \_\_\_\_\_

FIXTURE SCHEDULE: \_\_\_\_\_



# LED RETROFIT KITS

Thank you for buying RISE-LITE lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments.


Call the Marketing Department at 86-755-89491179 or email: sales@RISE-LITE.com

## SPECIFICATIONS

- ★ L70>60600 Hours
- ★ Commercial/Architectural Grade
- ★ Architectural UV resistant powder coat finish
- ★ Lighting Facts™ Uniform LM-79 Reporting Template
- ★ Photo-electric Switch (Optional) – Listed (WJCT),
- ★ UL&cUL Listed
- ★ Dimmable: 1-10VDC/PWM/Resister (3 in 1)
- ★ System Watts: 300W/320W/370W/450W/480W
- ★ Voltages: 100-277Vac / 347-480Vac
- ★ CRI:70+
- ★ Operating Temp: -30 °C to +50 °C
- ★ Operating Humidity: 20% to 90%RH
- ★ Power Fact(PF) : 0.99
- ★ Power Supply Efficiency: > 90%
- ★ Color Temperature: 3000-5700K



## Dimension

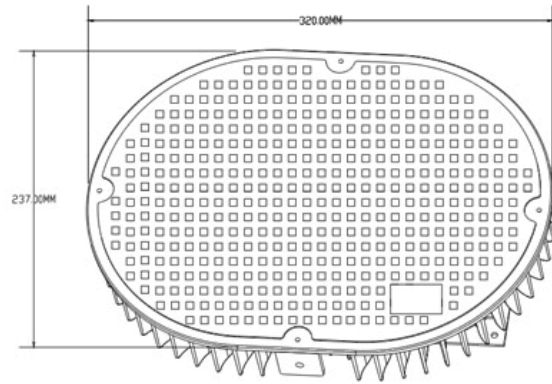

## ORDERING INFORMATION

M/N	Watts	lumen Efficiency	Line voltage supply	Color Temperature	Beam Angle	Replace HID/MH
RL-RTK-300W-HV-D-NW	304.9W	107.0 lm/w	347-480Vac	4100K	113.8°	1000W
RL-RTK-300W-HV-D-DW	304.9W	107.0 lm/w	347-480Vac	5000K	113.8°	1000W
RL-RTK-300W-HV-D-CW	313.9W	110.16lm/w	347-480Vac	5700K	113.8°	1000W
RL-RTK-320W-LV-D-NW	311.3W	108.05lm/w	100-277Vac	4100K	113.6°	1000W
RL-RTK-320W-LV-D-DW	311.3W	108.05lm/w	100-277Vac	5000K	113.7°	1000W
RL-RTK-320W-LV-D-CW	308.4W	113.25 lm/w	100-277Vac	5700K	113.7°	1000W
RL-RK-370W-B-LV-D-NW	372.1W	101.64lm/w	100-277Vac	4100K	113.7°	1000W
RL-RK-370W-B-LV-D-DW	372.1W	101.64lm/w	100-277Vac	5000K	113.7°	1000W
RL-RK-370W-B-LV-D-CW	369.1W	108.15 lm/w	100-277Vac	5700K	113.7°	1000W
RL-RTK-450W-HV-D-NW	421.3W	107.57 lm/w	347-480Vac	4100K	113.4°	1500W
RL-RTK-450W-HV-D-DW	421.3W	107.57 lm/w	347-480Vac	5000K	113.4°	1500W
RL-RTK-450W-HV-D-CW	426.9W	112.76lm/w	347-480Vac	5700K	113.4°	1500W
RL-RTK-480W-LV-D-NW	505.9W	95.57lm/w	100-277Vac	4100K	113.7°	1500W
RL-RTK-480W-LV-D-DW	505.9W	95.57lm/w	100-277Vac	5000K	113.7°	1500W
RL-RTK-480W-LV-D-CW	503.6W	100.81lm/w	100-277Vac	5700K	113.7°	1500W

Where "YY" in model name can be "SW", "WW", "NW", "DW" or "CW".

