



LED Bollards

Product Description

LED SION LED Bollard Light- fixture has a round appearance for good decorative effect, sized in 3.5ft height. For commercial applications, 50000hrs high efficiency led driver. Efficiency higher than 115 lm/W with zero up light. Dark bronze polyester powder-coat finish.

Advantage

- UL, DLC approved.
- Input voltage 120-277VAC.
- No UV or IR in the beam.
- Robust ground cage Pre-buried installation.
- Energy saving, long lifespan.
- Instant start, NO flickering, NO humming.
- Green and Eco-friendly without mercury.
- Drivers come standard with 1-10V dimming leads capable of variable dimming down to 10%.



Applications

Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.





LED Bollard Light

Specifications

Model No.	LSBO26W
Input Power	26W
Lumen	2290LM
Lumen Efficiency	115LM/W
Color Temperature	3000K, 4000K, 5000K, 6000K
CRI	>80
Viewing Angle	360 Degree
Input Voltage	120-277VAC 50/60Hz
PF	≥0.9
THD	≤20%
Driver Brand	China brand driver
LED Brand	PHILIP
LED Type	SMD2835
Dimmer	1-10V Dimming
Housing	Aluminum+PC
Housing Color	Brown
Waterproof Rating	IP65
Operating Temperature	-40°C TO 40°C
Operating Humidity	20%-90% RH
Storage Temperature	-40°C TO 80°C
Storage Humidity	10%-95% RH
Warranty Time	5 Years

Projected LED Lumen Maintenance

Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the LED Bollard LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).


LED Bollard Light

Structure



Dimensions:Inch

unit: inch/mm

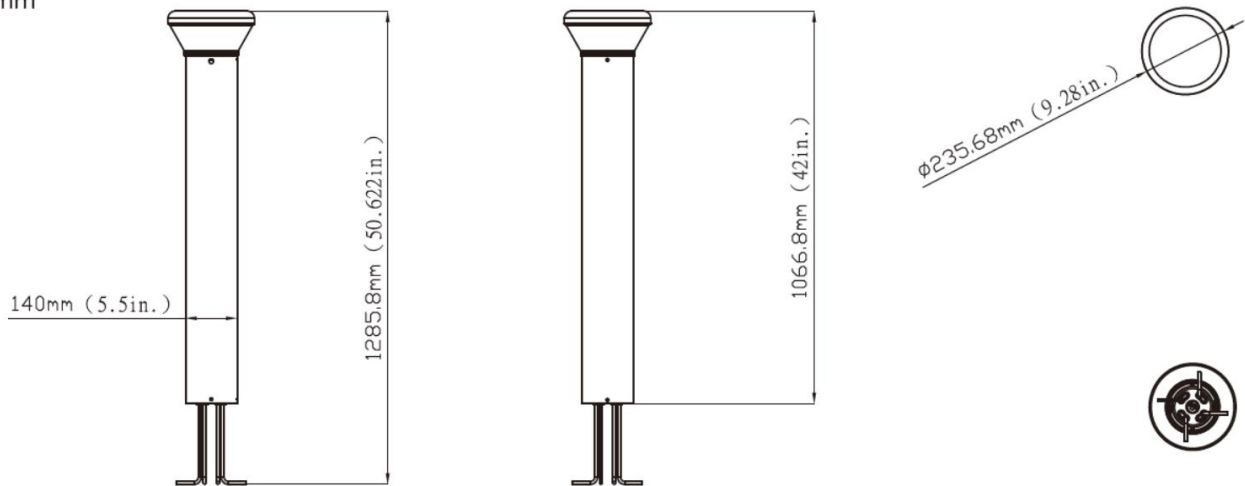

Package

Model No	Carton Size (L×W×H)	Qty/Carton (pcs)	Net Weight (kg)	Gross Weight (kg)
LSBO26W	114×27×27cm	1	5.5	6.1

<http://www.ledsion.com>

FREE:1-972-951-7795

E-mail:info@ledsion.com

Add:3#GUANLAN OPTO INDUSTRIAL PARK,SHENZHEN,GUANGDONG,CHINA



LED Bollard Light

Warning

The installation and maintenance must be completed by electrician or professionals.

1. Please cut off the power before installation and maintenance.
2. The thermally insulating material is not allowed to cover the fixture.
3. Please keep away from the corrosive substance, and keep the fixture dry and clean.

After Sales Service

The product refers to electricians knowledge. Please don't disassemble it by yourself.

If any quality problem happens, please contact the factory for warranty details.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are without notice.