


PROJECT ANME: _____

CATALOG NUMBER: _____

NOTES: _____

FIXTURE SCHEDULE: _____



LED SHOE BOX LIGHT

Thank you for buying RISE-LITE lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments.


Call the Marketing Department at 86-755-89491179 or email: sales@RISE-LITE.com

SPECIFICATIONS

- ★ L70>60600 Hours
- ★ Commercial/Architectural Grade
- ★ Architectural UV resistant powder coat finish
- ★ Lighting Facts™ Uniform LM-79 Reporting Template
- ★ Photo-electric Switch (Optional) – Listed (WJCT),
- ★ UL Listed
- ★ System Watts:150W 200W 300W 320W
- ★ Voltages: 100-277Vac 347-480Vac
- ★ CRI:70+
- ★ IP65
- ★ Operating Temp: -30 °C to +50 °C
- ★ Operating Humidity: 20% to 90%RH
- ★ Power Fact(PF) : 0.99
- ★ Power Supply Efficiency: > 90%
- ★ Color Temperature: 5000-5700K



Dimension

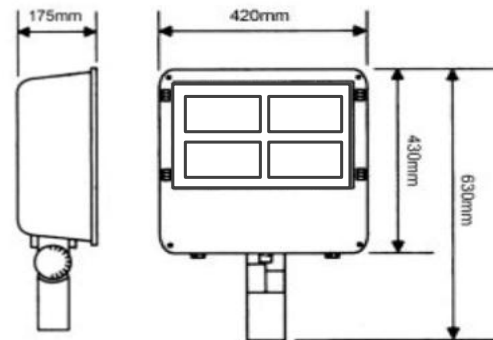

ORDERING INFORMATION

M/N	Watts	lumen Efficiency	Line voltage supply	Color Temperature	Beam Angle	Replace HID/MH
RL-SB-150W-LV-A-CW	142.0W	98.77lm/w	100-277Vac	5700K	118.2°	400W
RL-SB-200W-LV-A-CW	188.5W	90.98lm/w	100-277Vac	5700K	117.7°	700W
RL-SB-300W-HV-A-CW	306.4W	76.78lm/w	347-480Vac	5700K	118.2°	1000W
RL-SB-320W-LV-A-CW	288.2W	78.47 lm/w	100-277Vac	5700K	78.47°	1000W

Where "YY" in model name can be "SW", "WW", "NW", "DW" or "CW".

