


PROJECT ANME: _____

CATALOG NUMBER: _____

NOTES: _____

FIXTURE SCHEDULE: _____



LED FLOOD LIGHT (C style)

Thank you for buying RISE-LITE lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments.


Call the Marketing Department at 86-755-89491179 or email: sales@RISE-LITE.com

SPECIFICATIONS

- ★ L70>60000 Hours
- ★ Commercial/Architectural Grade
- ★ Architectural UV resistant powder coat finish
- ★ Lighting Facts™ Uniform LM-79 Reporting Template
- ★ Photo-electric Switch (Optional) – Listed (WJCT),
- ★ UL Listed
- ★ Dimmable: 1-10VDC/PWM/Resister (3 in 1)
- ★ System Watts: 80W/100W/120W/150W
- ★ Voltages: 100-277Vac
- ★ CRI:70+
- ★ IP65
- ★ Operating Temp: -40 °C to +70 °C
- ★ Operating Humidity: 20% to 90%RH
- ★ Power Fact(PF) : 0.99
- ★ Power Supply Efficiency: > 90%
- ★ Color Temperature: 3000-5000K



Dimension

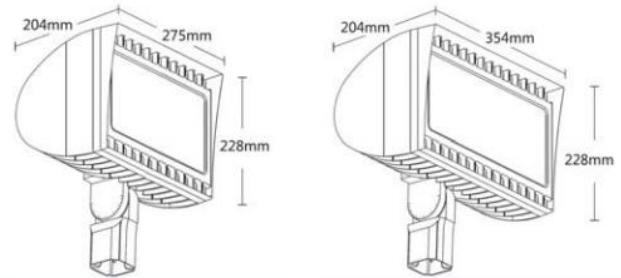

275*204*228MM 80W/100W
354*204*228MM 120W/150W

ORDERING INFORMATION

M/N	Watts	lumen Efficiency	Line voltage supply	Color Temperature	Beam Angle	Replace HID/MH
RL-XX-80W-LV-C-D-DW	86.26W	108.14 lm/w	100-277Vac	5000K	107.8°	200W
RL-XX-100W-LV-C-D-DW	96.46W	107.89 lm/w	100-277Vac	5000K	109.0°	300W
RL-XX-120W-LV-C-D-DW	119.1W	111.17 lm/w	100-277Vac	5000K	109.2°	400W
RL-XX-150W-LV-C-D-DW	144.4W	107.94 lm/w	100-277Vac	5000K	109.1°	500W

Where "XX" in model name can be "FL", "AL", "ST" "SB" or "WP".

Where "YY" in model name can be "SW", "WW", "NW", "DW" or "CW".

