

Project

Schedule

Date

Notes

DESCRIPTION

naturaLED® Wall Lights come in 10-watt, 20-watt and 25-watts to replace your existing incandescent up to 200-watt, saving up to 90% of energy. Super energy efficient and lasts up to 50,000+ hours average life. naturaLED® wall lights are an ideal lighting solution for security lights, both residential, commercial and many other outdoor applications.



FEATURES

- Energy Star Qualified
- UL Wet
- Up to 80% energy savings
- Instant on
- Light weight
- Contains no mercury or lead
- 50,000 hrs rated average life
- Input line voltage: 120V, 120-277V
- Power Factor: >0.9
- THD: <20%
- Beam Angle: Flood
- Operating temperature: -22°F - 122°F
- Finish: Black / White / Nickel

APPLICATIONS

- Security Lighting
- Accent Lighting
- Residential Lighting
- Outdoor Lighting
- Wall Lighting


WARRANTY

- 5 Year Warranty

SPECIFICATIONS


FXDWS - 10W

Weight: 1.54-lbs

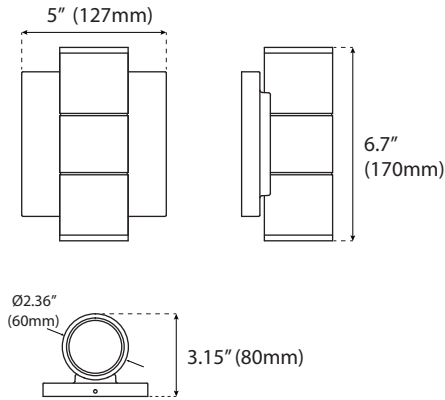


FXDWS - 20W

Weight: 2.43-lbs

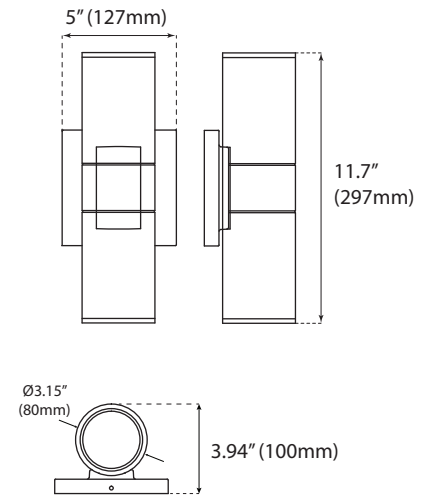



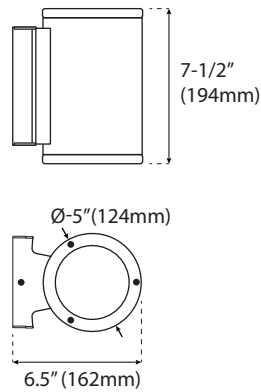

FX5DWS - 25W

Weight: 3.75-lbs




ORDERING

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Style	Beam Angle	Color	Voltage	Wet	ES
	Up/Down Wall Sconce (Black)										
10	7026	LED-FXDWS10/830/BK	3000K	700	90	Up/down Wall Sconce	38	Black	120V	•	•
10	7027	LED-FXDWS10/850/BK	5000K	700	90	Up/down Wall Sconce	38	Black	120V	•	•
20	7064	LED-FXDWS20/830/BK	3000K	1,400	200	Up/down Wall Sconce	38	Black	120V	•	•
20	7065	LED-FXDWS20/850/BK	5000K	1,400	200	Up/down Wall Sconce	38	Black	120V	•	•
	Up/Down Wall Sconce (White)										
10	7068	LED-FXDWS10/830/WH	3000K	700	90	Up/down Wall Sconce	38	White	120V	•	•
10	7069	LED-FXDWS10/850/WH	5000K	700	90	Up/down Wall Sconce	38	White	120V	•	•
20	7070	LED-FXDWS20/830/WH	3000K	1,400	200	Up/down Wall Sconce	38	White	120V	•	•
20	7071	LED-FXDWS20/850/WH	5000K	1,400	200	Up/down Wall Sconce	38	White	120V	•	•
	Up/Down Wall Sconce (Nickel)										
10	7022	LED-FXDWS10/830/NI	3000K	700	90	Up/down Wall Sconce	38	Nickel	120V	•	Pending
20	7023	LED-FXDWS20/830/NI	3000K	1,400	200	Up/down Wall Sconce	38	Nickel	120V	•	Pending
	Wall Sconce (Black)										
25	7792	LED-FX5DWS25/33S/930/BK	3000K	1,700	100	Wall Sconce	33	Black	120-277V	IP65	•

PHOTOMETRICS CHART


DWS - up/down Wall Sconce (10W)

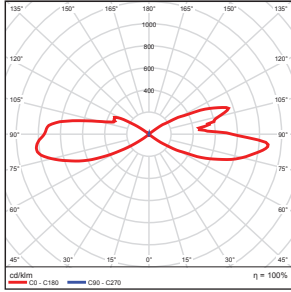

Illuminance at a Distance			
Center Beam fc	Beam Width		
17.0R	0.02 fc	7.9 ft	12.8 ft
34.0R	0.00 fc	15.8 ft	25.5 ft
51.0R	0.00 fc	23.8 ft	38.3 ft
68.0R	0.00 fc	31.7 ft	51.1 ft
85.0R	0.00 fc	39.6 ft	63.8 ft
102.0R	0.00 fc	47.5 ft	76.6 ft

■ Vert. Spread: 26.2°
■ Horiz. Spread: 41.2°


DWS - up/down Wall Sconce (20 Watt)

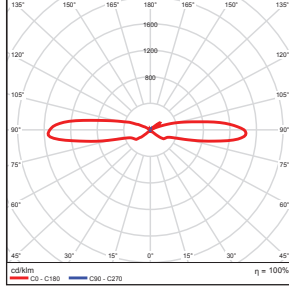

Illuminance at a Distance			
Center Beam fc	Beam Width		
17.0R	0.04 fc	7.0 ft	8.5 ft
34.0R	0.01 fc	14.0 ft	17.1 ft
51.0R	0.00 fc	21.1 ft	25.6 ft
68.0R	0.00 fc	28.1 ft	34.2 ft
85.0R	0.00 fc	35.1 ft	42.7 ft
102.0R	0.00 fc	42.1 ft	51.3 ft

■ Vert. Spread: 23.3°
■ Horiz. Spread: 28.2°

5DWS - Wall Sconce (25 Watt)

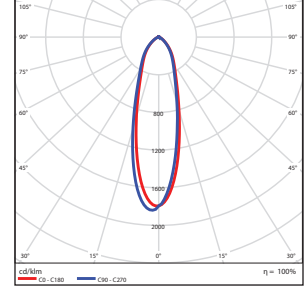


Illuminance at a Distance			
Center Beam fc	Beam Width		
5.0R	92.4 fc	2.6 ft	2.6 ft
10.0R	23.1 fc	5.2 ft	5.2 ft
15.0R	10.3 fc	7.8 ft	7.9 ft
20.0R	5.78 fc	10.4 ft	10.5 ft
25.0R	3.70 fc	13.1 ft	13.1 ft
30.0R	2.57 fc	15.7 ft	15.7 ft


■ Vert. Spread: 29.3°
■ Horiz. Spread: 29.4°

PACKAGE

Master Pack: 10 pcs
For Up/Down Wall Sconce 10W

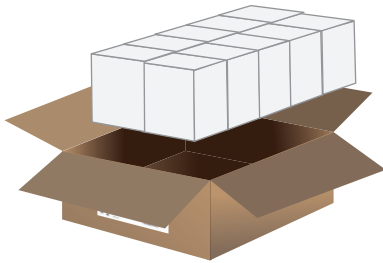

Master Pack: 5 pcs
For Up/Down Wall Sconce 20W

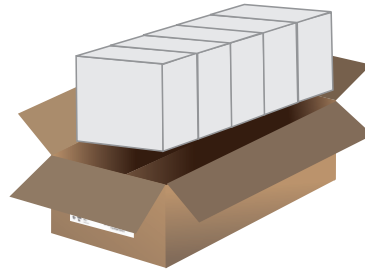

Master Pack: 4 pcs
For Wall Sconce 25W

