

JELLY JAR (VTJ)

Project
Schedule
Date
Notes

DESCRIPTION


naturaLED® LED Vapor Tight Jelly Jar (VTJ) are designed to replace incandescent and CFL fixtures with long-lasting illumination over doorways, scaffolding, construction sites, and many more applications. Our naturaLED® LED Vapor Tight Jelly Jars are IP65 Rated against ingress of dust, pressurized water and harsh environments. Constructed with cast aluminum housing and glass lens. Available in two different mounting options: ceiling and wall, 65% less energy and zero maintenance cost for up to 50,000+ average life hours.



FEATURES

- Energy Star Qualified
- L70 Rated Chip for over 100,000 projected life hours
- IP65 Rated / UL 1598 for use in wet locations
- Frosted glass diffuser provides you glare-free light
- High efficacy with 90 lumen per watt
- High-temperature silicone gasket protects against moisture and dust
- 2KV surge protection
- Material: Die-Cast Aluminum / Glass
- Four 1/2" conduit entries for easy wiring
- Input line voltage: 120-277V
- Operating temperature: -4°F - 122°F

REPLACEMENT SAVINGS

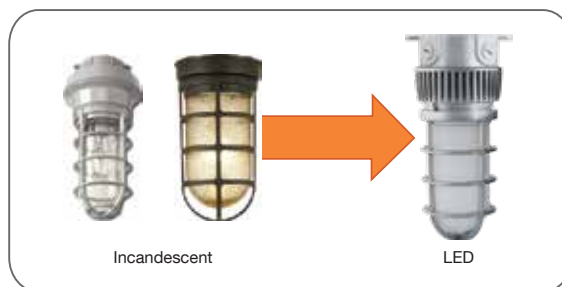

Replace Incandescent and CFL with LED

APPLICATIONS

- Security Lighting
- Doorway
- Scaffolding Lighting
- Construction Sites Lighting
- Fire Hydrants

WARRANTY



- 5 Year Warranty



■ SPECIFICATIONS



20W-Wall Mount

Weight: 3.80-lbs

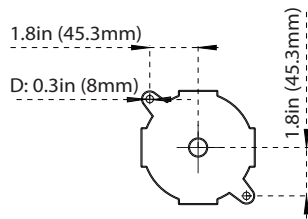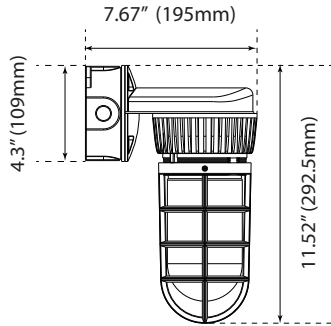

20W-Ceiling Mount

Weight: 3.80-lbs

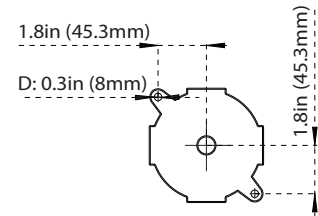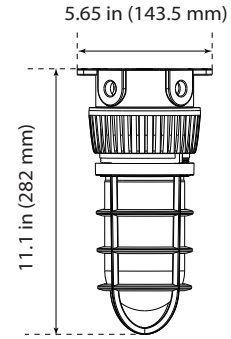


■ ORDERING

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (HID/Incandescent)	Mount	Voltage	Rated Hrs	IP65 Rated	Energy Star
20	7604	LED-FXVTJ20/830/MV-WM	3000K	1,700	150	Wall	120-277	50,000	•	•
20	7605	LED-FXVTJ20/840/MV-WM	4000K	1,700	150	Wall	120-277	50,000	•	•
20	7606	LED-FXVTJ20/830/MV-CM	3000K	1,700	150	Ceiling	120-277	50,000	•	•
20	7607	LED-FXVTJ20/840/MV-CM	4000K	1,700	150	Ceiling	120-277	50,000	•	•

PHOTOMETRICS CHART

VTJ 20W (Wall Mount)

Energy Star

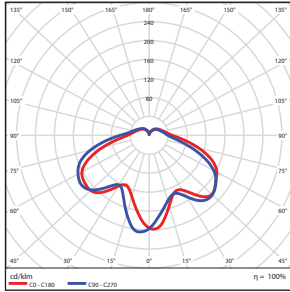


Illuminance at a Distance

Center Beam fc	Beam Width	2.5ft	5.0ft	7.5ft	10.0ft	12.5ft	15.0ft
59.6 fc	20.4 ft	20.3 ft	40.7 ft	61.0 ft	81.4 ft	101.7 ft	122.0 ft
14.9 fc	40.8 ft	40.7 ft	81.4 ft	122.0 ft	162.6 ft	203.2 ft	243.8 ft
6.62 fc	81.2 ft	81.0 ft	162.0 ft	243.0 ft	324.0 ft	405.0 ft	486.0 ft
3.73 fc	161.6 ft	161.4 ft	322.8 ft	484.2 ft	645.6 ft	807.0 ft	968.4 ft
2.38 fc	102.0 ft	101.7 ft	203.4 ft	305.1 ft	406.8 ft	508.5 ft	610.2 ft
1.66 fc	122.4 ft	122.0 ft	244.0 ft	366.0 ft	488.0 ft	610.0 ft	732.0 ft

■ Vert. Spread: 152.5°
■ Horiz. Spread: 152.4°

VTJ 20W (Ceiling Mount)

Energy Star

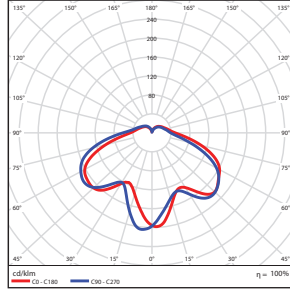

Illuminance at a Distance

Center Beam fc	Beam Width	2.5ft	5.0ft	7.5ft	10.0ft	12.5ft	15.0ft
59.6 fc	20.4 ft	20.3 ft	40.7 ft	61.0 ft	81.4 ft	101.7 ft	122.0 ft
14.9 fc	40.8 ft	40.7 ft	81.4 ft	122.0 ft	162.6 ft	203.2 ft	243.8 ft
6.62 fc	81.2 ft	81.0 ft	162.0 ft	243.0 ft	324.0 ft	405.0 ft	486.0 ft
3.73 fc	161.6 ft	161.4 ft	322.8 ft	484.2 ft	645.6 ft	807.0 ft	968.4 ft
2.38 fc	102.0 ft	101.7 ft	203.4 ft	305.1 ft	406.8 ft	508.5 ft	610.2 ft
1.66 fc	122.4 ft	122.0 ft	244.0 ft	366.0 ft	488.0 ft	610.0 ft	732.0 ft

■ Vert. Spread: 152.5°
■ Horiz. Spread: 152.4°

PACKAGE

Master Pack: 2 pcs

