


CK4

cleankeys®

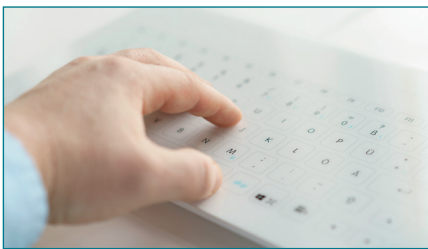

FEATURES

- Complete flat Gorilla® glass surface
- Excellent hygienic level, because it's washable and disinfectable
- Full key layout with integrated Touchpad
- Volume and sensitivity are adjustable individually
- Key lock to disable the keyboard before cleaning
- Various designs are possible
- Rearside VESA mounting option
- EMC compliant with DIN EN 60601-1-2:2016 (IEC 60601-1-2:2014 4th Edition)

TECHNICAL DATA

Housing type:	desktop keyboard	Operating temperature:	0 °C to +60 °C
Switch technology:	capacitive	Storage temperature:	-40 °C to +65 °C
Number of keys:	103	Enclosure material:	plastic
Interface:	USB (compliant with USB 2.0)	Surface:	0.8 mm glass
Cursor control:	touchpad	Keyboard dimensions:	470 x 167 x 25.4 mm
Protection level:	glass-side IP65	Special keys:	Keylock, Sensitivity, Volume
Impact protection rate:	IK10	Certifications:	CE, FCC Part 15 Subpart B
Operating force:	0 N	System requirements:	Win®, MacOS® and Linux® *

ORDER INFORMATION

Cat.No.	Product description	Interface	Layout
KR23210	TKR-103-TOUCH-KGEH-VESA-WHITE-USB-DE	USB	German
KR23211	TKR-103-TOUCH-KGEH-VESA-WHITE-USB-US/EU	USB	US/EU English
KR23213	TKR-103-TOUCH-KGEH-VESA-WHITE-USB-FR	USB	French
KR23214	TKR-103-TOUCH-KGEH-VESA-WHITE-USB-CH	USB	Swiss
KR23215	TKR-103-TOUCH-KGEH-VESA-WHITE-USB-SKAN	USB	Scandinavian
KR23216	TKR-103-TOUCH-KGEH-VESA-WHITE-USB-US/ARAB	USB	US Arabic
KR23217	TKR-103-TOUCH-KGEH-VESA-WHITE-USB-UK	USB	UK English
KR23218	TKR-103-TOUCH-KGEH-VESA-WHITE-USB-IT	USB	Italian

Other language versions available on request.

* if OS and Hardware meet the requirements of USB2.0 Compliance

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49 37468 660-0
Fax: +49 37468 660-66
E-Mail: info@gett.de
Internet: www.gett.de

Gett North America LLC


E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com
Internet: www.gett-asia.com


gett-group.com
washable-keyboards.com

DIMENSIONAL DRAWING

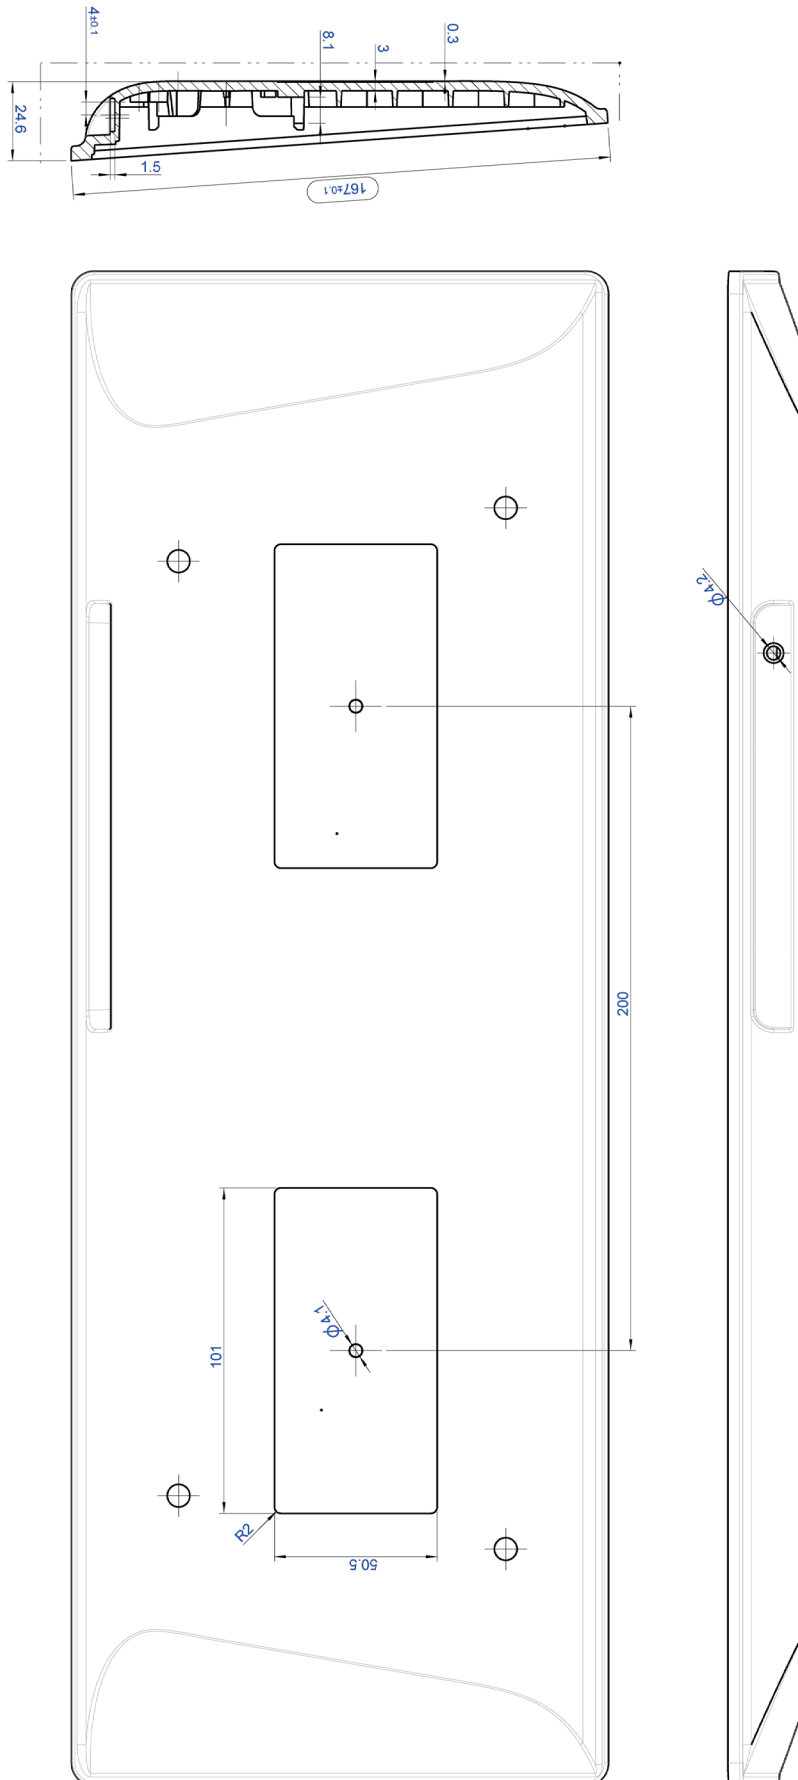


Subject to modifications and errors

KEY FUNCTIONS:

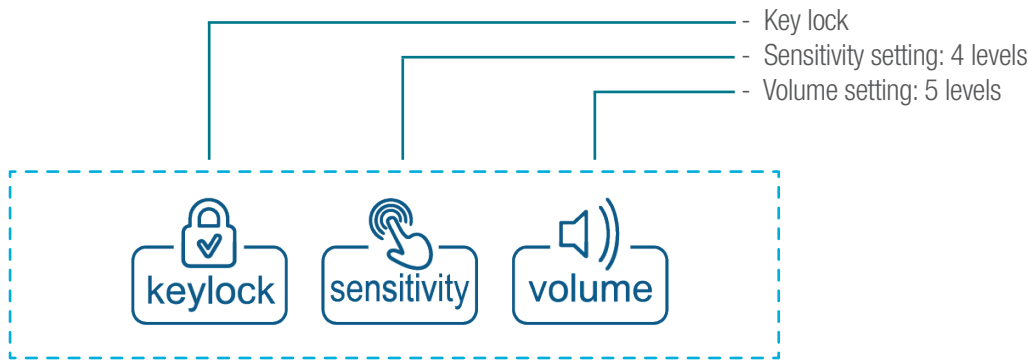


- - - - 8 LED chain to display the key lock and the settings for sensitivity and volume

The sensitivity can be set as follows (ascending):

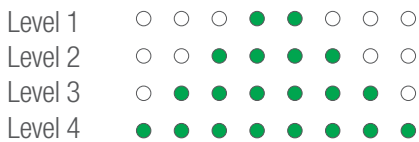

The volume can be set as follows (ascending):

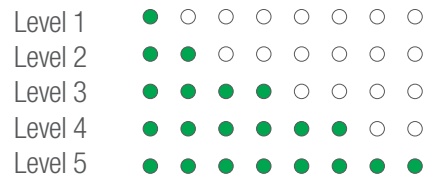

KEY LOCK FUNCTION

Press the key for approx. 2 seconds. This will cause the status display to flash; when it is permanently green, the keys are locked. To unlock the system, press the key for 2 seconds again and wait until the status LED goes off. The keys are then ready for use again.

CLEANING

You can clean the glass surface with normal cleaning and disinfecting agents. The chemical resistance of the glass surface may vary depending on the concentration of the solution and the particular environmental conditions. We therefore recommend that you carefully check your cleaning and disinfecting agents to see how they affect glass surfaces.

INDIVIDUAL MODIFICATIONS

- Adding a Logo/Brand (1-4 colours)
- New country layout
- Individual GUI design
- Reducing the keyboard cable length
- Changing of the keytable (HID-Standard)