
### **REQUIRED GLASS PREP 'A'**




DIM X = 27mm + DIM (t) (GLASS THICKNESS)


E.G. 8mm GLASS.


DIM X = 27mm + 8mm = 35mm


## **REQUIRED** GLASS PREP 'B'



#### **PLAN VIEW ON FITTING**

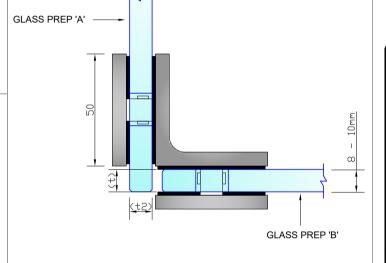

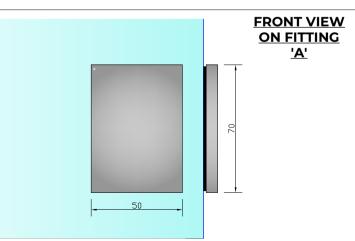

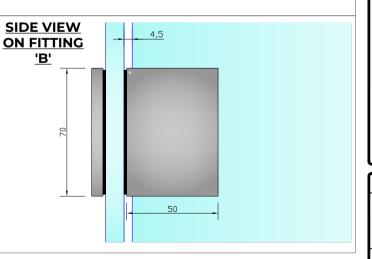



**Express Glass Warehouse** 51-55 Fowler Road, Hainault, Essex IG6 3UT

Tel: +44 (0)20 8500 1188 Fax: +44 (0)20 8500 1010 Email: info@egw.co.uk Website: www.eaw.co.uk

Copyright (C) - October 2020, All Rights Reserved

## **NOTES/SPECIFICATION:**

ALL VISIBLE COMPONENTS IN BRUSHED NICKEL PLATED BRASS.

PRODUCT SUITABLE FOR 8 TO 10mm TOUGHENED GLASS PANES.

FITTING SUPPLIED COMPLETE WITH:-

1) 4 No. x 1.25mm BLACK RUBBER GLAZING WASHERS. 2) 2 No. M6 x 12mm ST/ST HEX HEAD CSK SETSCREWS.

(NOTE CUSTOMER TO PROVIDE ALTERNATIVE FIXINGS WHERE REQUIRED)

# PRODUCT REF: | SH/NKE/B02/S **DESCRIPTION:** DIMENSIONED ELEVATIONS AND REQUIRED GLASS PREP DETAIL DRAWING REF: SH/NKE/B02/S - 001