



Crossgrip Roof Walkway Matting PVC


All weather safe access



Crossgrip Roof Walkway Matting PVC is the perfect solution for safe access to rooftop services. Easy to install, maintenance free and does not react to the existing roof surface. It provides a high quality slip resistant surface to allow essential works to be carried out on flat rooftops whatever the weather

Main Benefits



- High slip resistance
- Good drainage
- Flexible to cover roof imperfections
- Protection of roof from foot traffic
- Quick and easy to install
- Maintenance free
- Long lasting
- UV resistant
- Compatible with most roof surfaces
- Stable in winds up to 94MPH

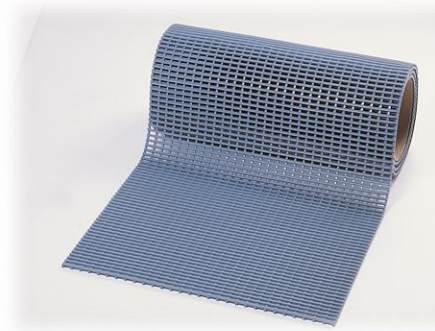

Crossgrip roof walkway matting PVC is available in three roll widths 60cm, 91cm or 122cm. All the rolls are 10 metres long and the grid stands at 14mm high. Crossgrip roof walkway matting is available in homogenous standard colours of light grey and black.



Technical data sheet Crossgrip roof walkway matting

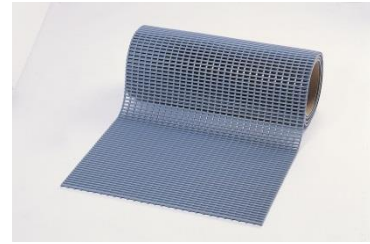

Size and weight Crossgrip PVC	Length 0+.03	Height +/- 0.5	Widths in cm			Weight
	Metres	Millimetres	+/- 1			Kg/ m ²
	10	14	60	91	122	6.6

General

APPEARANCES	PVC Grid: Open grid "duckboard" design with cross directional top ribs
COLOURS	Crossgrip PVC: Available in homogenous standard colours; Light Grey and Black <i>Other colours available on request</i>
DURABILITY	PVC Grid: One piece welded construction for long life and minimal maintenance
INSTALLATION	Loose laid. PVC ramp edging available in 6cm and 10cm width, for use with Crossgrip PVC
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	Specifically engineered for roof walkways. Does lend itself to other industrial uses

Technical Data

ACOUSTIC	PVC Grid: Excellent sound absorption properties
CHEMICAL	PVC GRID: Resistant to most acids, alkalines and oils. (For detailed chemical resistance analysis please see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline)
COMPOSITION	PVC Grid: Flexible DINP plasticised Polyvinyl Chloride (PVC)
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products. All PVC grid products are 100% recyclable.
FIRE	PVC Grid: EN13501-1:2007-Cfl 1-S1
HYGIENE	PVC Grid: Non-porous 100% Virgin PVC – Inhibits the growth of bacteria
REVERSION	PVC Grid: Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
SLIP RESISTANCE	ASTM F 1677 (Dry/Wet) Crossgrip PVC (0.6/0.5) DIN 51130 Crossgrip PVC R10, V10
THERMAL	PVC Grid: Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV Light	PVC Grid: Resistant to PVC degradation; uncoloured PVC material BS EN607=Delta E1.02
WARRANTY	PVC Grid: 5 years manufactures warranty – Please ask for further details and terms
WIND STABILITY	PVC Grid: remained stable in wind speeds up to 94mph (150 Km/h). <i>When loose laid in laboratory conditions on a flat stable platform at the University of Hertfordshire, School of Aerospace, Automotive & Design Engineering.</i>