

CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.com



Flexi Coin & Eco Coin Vinyl Flooring

Large Stud Vinyl Solution



Flexi Coin is an attractive large stud multi-purpose sheet Vinyl flooring that is quick and easy to install. Flexi Coin vinyl comes in wide rolls of either 98cm or 150cm for quick coverage of large areas. A great flooring solution for many light duty applications

Eco Coin is an ecological and more economical version of Flexi Coin manufactured from 100% recycled factory waste.

Main Benefits

- Hard wearing
- Good slip resistance
- Chemical, oil and acid resistant
- Easy to cut on site
- Contours to uneven surfaces
- Quick to install
- UV resistant
- Supplied in convenient rolls
- Eco Coin made from 100% recycled mat




Flexi Coin Sheet Vinyl flooring is available in a roll width of 98cm and 150cm. Rolls are a standard length of 25Mtrs and stand 1.6mm high. Flexi Coin sheet vinyl floorings is available in homogenous standard colour of Blue. Eco Coin in Grey or Black



Matting Ltd
Company reg - 08599377
Vat - 166 4588 70
Call:0800 0599907 email: sales@mattingltd.com

CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.com

Technical data sheet Flexi Coin Vinyl Flooring

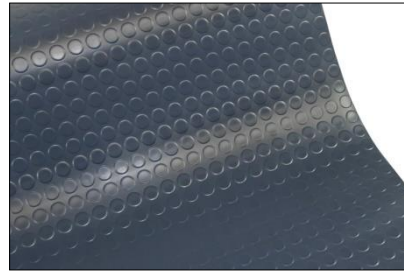

Size and weight Flexigrid	Length 0+.03	Height +/- 0.5	Widths in cm		Weight
	Metres	Millimetres	+/- 1		Kg/m ²
	25	1.6	98	150	2.4

General

APPEARANCES	Continuous sheet format with circled patterns
COLOURS	Flexi Coin – Blue Eco Coin - Grey or Black
DURABILITY	Continuous extruded sheet with high scuff resistance
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	Indoor or outdoor use for floor protection and floor enhancement

Technical Data

CHEMICAL	Resistant to most acids, alkalines and oils. (For detailed chemical resistance analysis please see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline)
COMPOSITION	Flexible DINP Plasticised Polyvinyl Chloride (PVC).
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products.
FIRE	EN ISO 13501 – 1: 2007 – Bfl- S1
HYGIENE	Non-porous PVC – Inhibits the growth of bacteria
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV Light	Resistant to PVC degradation; uncoloured PVC material BS EN607=Delta E1.02
WARRANTY	1-2 years manufactures warranty – Please ask for further details and terms.