

CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.com



Flexi Line Vinyl Flooring

Chemical resistant work area matting



Flexi line is a practical slip resistant PVC mat that is a great alternative to rubber runners in work areas. Its fluted surface resists oils, chemicals and acids helping to provide a safer working environment.

Flexi Line comes in an easy to install roll format that forms to the contours on uneven surfaces.

Main Benefits

- ▣ Slip resistance
- ▣ Hard wearing
- ▣ Chemical, oil and acid resistant
- ▣ Convenient sheet vinyl system
- ▣ Easy to clean and maintain
- ▣ Easy to cut on site
- ▣ Contours to uneven surfaces
- ▣ Fine ribbed surface
- ▣ Quick to install




Flexi Line sheet vinyl flooring is available in a roll width of 100cm. Rolls are a standard length of 25Mtrs and stand 2mm high. Flexi Line sheet vinyl floorings is available in homogenous standard colours of black, red and grey.



Matting Ltd
Company reg - 08599377
Vat - 166 4588 70
Call:0800 0599907 email: sales@mattingltd.com

CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.com

Technical data sheet FlexiLine Vinyl Flooring

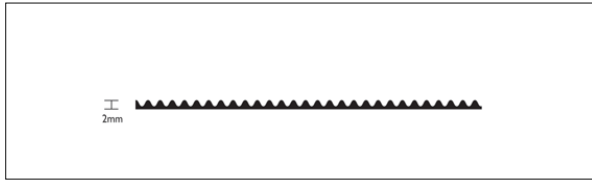

Size and weight Flexi Line	Length 0+.03	Height +/- 0.5	Widths in cm	Weight
	Metres	Millimetres	+/- 1	Kg/m ²
	25	2	100	2.2

General

APPEARANCES	Continuous sheet format with ribbed patterns
COLOURS	Black, Light Grey and Red
DURABILITY	Continuous extruded sheet with high scuff resistance
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	Indoor or outdoor use for floor protection and floor enhancement

Technical Data

CHEMICAL	Resistant to most acids, alkalines and oils. (For detailed chemical resistance analysis please see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline)
COMPOSITION	Flexible DINP Plasticised Polyvinyl Chloride (PVC).
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products.
FIRE	EN ISO 13501 – 1: 2007 – Bfl- S1
HYGIENE	Non-porous PVC – Inhibits the growth of bacteria
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV Light	Resistant to PVC degradation; uncoloured PVC material BS EN607=Delta E1.02
WARRANTY	1-2 years manufactures warranty – Please ask for further details and terms.