

CALL FREE ON 0800 05 999 07 or EMAIL [sales@mattingltd.com](mailto:sales@mattingltd.com)



## Flexi Ridge Vinyl Flooring

### Hard wearing ribbed matting



Flexi Ridge is a great multi purpose PVC mat that can be used for component protection. Its fluted surface resists oils, chemicals and acids helping to provide a safer working environment.

Flexi Ridge comes in an easy to install roll format that forms to the contours on uneven surfaces

#### Main Benefits

- ▣ Good slip resistance
- ▣ Hard wearing
- ▣ Chemical, oil and acid resistant
- ▣ Easy to clean and maintain
- ▣ Easy to cut on site
- ▣ Contours to uneven surfaces
- ▣ Easy to install
- ▣ Ribbed surface
- ▣ Made from flexible PVC
- ▣ Supplied in convenient roll format





Flexi Ridge sheet vinyl flooring is available in a roll width of 100cm. Rolls are a standard length of 20Mtrs and stand 2.8mm high. Flexi Line sheet vinyl floorings is available in homogenous standard colours of Green or Blue.



Matting Ltd  
Company reg – 08599377  
Vat – 166 4588 70  
Call:0800 0599907 email: [sales@mattingltd.com](mailto:sales@mattingltd.com)

## Technical data sheet Flexi Ridge Vinyl Flooring

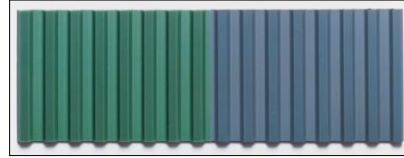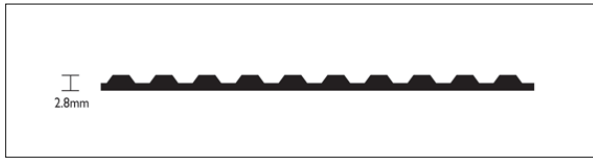

Size and weight Flexi Ridge	Length 0+.03	Height +/- 0.5	Widths in cm	Weight
	Metres	Millimetres	+/- 1	Kg/m <sup>2</sup>
	20	2.8	100	2.5

### **General**

APPEARANCES	Continuous sheet format with ribbed patterns
COLOURS	Green or Blue
DURABILITY	Continuous extruded sheet with high scuff resistance
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	Indoor or outdoor use for floor protection and floor enhancement

### **Technical Data**

CHEMICAL	Resistant to most acids, alkalines and oils. ( For detailed chemical resistance analysis please see <a href="http://www.plastexmatting.com/matfax/doc.php?doc_id=154&amp;action=inline">www.plastexmatting.com/matfax/doc.php?doc_id=154&amp;action=inline</a> )
COMPOSITION	Flexible DINP Plasticised Polyvinyl Chloride (PVC).
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC ( substances of Very High Concern) list under R.E.A.C.H. in any matting products.
FIRE	EN ISO 13501 – 1: 2007 – Bfl- S1
HYGIENE	Non-porous PVC – Inhibits the growth of bacteria
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV Light	Resistant to PVC degradation; uncoloured PVC material BS EN607=Delta E1.02
WARRANTY	1-2 years manufactures warranty – Please ask for further details and terms.