

CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.com



Flexi Tread Vinyl Flooring

Heavy Duty Ribbed Matting




Flexi Tread is a highly durable heavy duty vinyl matting that provides electrical resistance. It insulates from the dangers of electric shock, meeting DIN/EN 60243-1 with a breakdown voltage of 27kv.

Suitable for multiple commercial and industrial applications, it provides a high slip resistance to enhance a safe working environment.

Main Benefits

- ▣ Excellent slip resistance
- ▣ Insulates from electric shock
- ▣ High wear resistance
- ▣ Chemical, oil and acid resistant
- ▣ Easy to cut on site
- ▣ Contours to uneven surfaces
- ▣ Quick to install
- ▣ Supplied in convenient roll format
- ▣ Made from flexible PVC

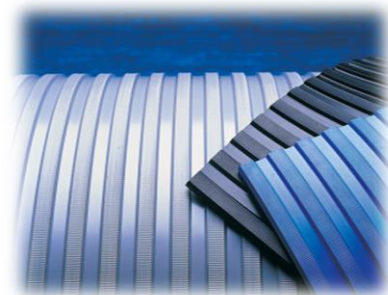

Flexi Tread sheet vinyl flooring is available in a roll width of 100cm. Rolls are a standard length of 10Mtrs and stand 4mm high. Flexi Tread sheet vinyl floorings is available in homogenous standard colours of Blue, Brown, Light Grey or Black.



Matting Ltd
Company reg - 08599377
Vat - 166 4588 70
Call:0800 0599907 email: sales@mattingltd.com

Technical data sheet Flexi Tread Vinyl Flooring



Size and weight Flexi Tread	Length 0+.03	Height +/- 0.5	Widths in cm	Weight
	Metres	Millimetres	+/- 1	Kg/ m ²
	10	4	100	4.2

General

APPEARANCES	Continuous sheet format with ribbed patterns
COLOURS	Blue, Brown, Light grey and Black
DURABILITY	Continuous extruded sheet with high scuff resistance
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	Indoor or outdoor use for floor protection and floor enhancement

Technical Data

CHEMICAL	Resistant to most acids, alkalines and oils. (For detailed chemical resistance analysis please see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline)
COMPOSITION	Flexible DINP Plasticised Polyvinyl Chloride (PVC).
ELECTRICAL	BS 2782: Part 2 Method 230A Insulation resistance > 2000M Ω Electrical strength= 20,000 volts DIN 60243-1 (VDE 0303 part 21): 1999-03 Breakdown voltage: 27.050 kV eff
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products.
FIRE	UL 94. Horizontal burning test. Classification 94HB
HYGIENE	Non-porous PVC – Inhibits the growth of bacteria
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV Light	Resistant to PVC degradation; uncoloured PVC material BS EN607=Delta E1.02
WARRANTY	1-2 years manufactures warranty – Please ask for further details and terms.