

CALL FREE ON 0800 05 999 07 or EMAIL [sales@mattingltd.com](mailto:sales@mattingltd.com)



## Heronair Matting


### Hardwearing and Versatile Matting Solution



Heronair is a slip resistant and cost effective safety matting designed to provide high performance cushioning to reduce standing fatigue. Constructed with flexible PVC hollow ribs, Heronrib is light weight yet hardwearing. Its 10mm slip resistant open grid dissipates spills and debris, providing a safer and more comfortable working environment.

#### **Main Benefits**

- High slip resistance
- Excellent anti-fatigue properties
- Hard wearing
- Made from 100% recycled materials
- Chemical, oil and acid resistant
- Loose lay yet stable underfoot
- Easy to clean and maintain
- Excellent drainage certification
- UV resistant
- Hygienic
- Excellent cushioning, thermal and noise reducing properties

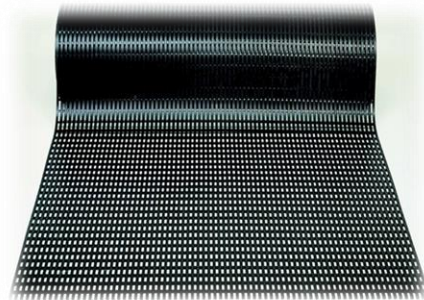



Heronair matting is available in three roll widths 50cm, 75cm or 100cm. Rolls are 10 metres long each 10mm high. Heronair matting is available in homogenous standard colour of black.



Matting Ltd  
Company reg – 08599377  
Vat – 166 4588 70  
Call:0800 0599907 email: [sales@mattingltd.com](mailto:sales@mattingltd.com)

CALL FREE ON 0800 05 999 07 or EMAIL [sales@mattingltd.com](mailto:sales@mattingltd.com)

## Technical data sheet Heronair matting



Size and weight Heronair	Length 0+.03	Height +/- 0.5	Widths in cm			Weight
	Metres	Millimetres	+/- 1			Kg/m <sup>2</sup>
	10	10	50	75	100	4.5

### **General**

APPEARANCES	Open grid "Duckboard" design with textured surface.
COLOURS	Black homogeneous stable colour.
DURABILITY	One piece welded construction for long life and minimal maintenance
INSTALLATION	Loose laid
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	All Medium indoor and outdoor uses.

### **Technical Data**

ACOUSTIC	Excellent sound absorption properties
CHEMICAL	Resistant to most acids, alkalines and oils. ( For detailed chemical resistance analysis please see <a href="http://www.plastexmatting.com/matfax/doc.php?doc_id=154&amp;action=inline">www.plastexmatting.com/matfax/doc.php?doc_id=154&amp;action=inline</a> )
COMPOSITION	Flexible DINP Plasticised Polyvinyl Chloride (PVC).
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC ( substances of Very High Concern) list under R.E.A.C.H. in any matting products.
FIRE	DIN4102 Part1-Classification B2
HYGIENE	Non-porous PVC – Inhibits the growth of bacteria
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
SLIP RESISTANCE	ASTM F 1677 (Dry/Wet) (0.6/0.6) DIN 51130 R11, V10
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV Light	Resistant to PVC degradation.
WARRANTY	2 years manufactures warranty – Please ask for further details and terms.