

CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.com



Herongripa Matting

Animal Fat Resistant Matting Solution




Herongripa has been developed primarily for the food processing and preparation industries. It is a specialised vinyl matting which is resistant to animal fat and oils. The wide spaced open grid format keeps waste and spillages away from the standing area.

The one piece hardwearing vinyl roll format allows for ease of rolling for cleaning. Anti-bacterial and anti-fungal additives ensure hygiene.




Main Benefits

- Animal fat resistant
- High slip resistance
- Efficient fluid and waste drainage
- Anti-bacterial and anti-fungal additives
- Roll format for one piece coverage
- Hard wearing
- Chemical, oil and acid resistant
- Loose lay yet stable underfoot
- Easy to clean and maintain
- UV resistant
- Hygienic
- Excellent cushioning, thermal and noise reducing properties

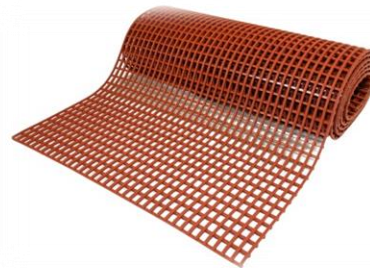

Herongripa matting is available in three roll widths 60cm, 91cm or 122cm. Rolls are either 5 or 10 metres long each 15mm high. Herongripa matting is available in homogenous standard colour of Terracotta.

Technical data sheet Herongripa matting



Size and weight Herongripa	Length 0+.03		Height +/- 0.5	Widths in cm			Weight
	Metres		Millimetres	+/- 1			Kg/m ²
	5	10	15	60	91	122	4.3

General

APPEARANCES	Open grid "Duckboard" design with textured surface.
COLOURS	Terracotta homogeneous stable colour.
DURABILITY	One piece welded construction for long life and minimal maintenance
INSTALLATION	Loose laid
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	For food processing and preparation areas.

Technical Data

ACOUSTIC	Excellent sound absorption properties
CHEMICAL	Resistant to most acids, alkalines and oils. (For detailed chemical resistance analysis please see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline)
COMPOSITION	Flexible animal fat resistant DINP Plasticised Polyvinyl Chloride (PVC) with Steritouch additives.
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products.
HYGIENE	Non-porous 100% Virgin PVC – Inhibits the growth of bacteria
Anti-bacterial	SteriTouch additive; Test JIS Z 2801:2000 –Determination of the antibacterial effect against: 1) Staphylococcus aureus – Result: Antimicrobial pass of >99% 2) E.Coli - Result: Antimicrobial pass of >99.99%
Anti-Fungal	SteriTouch additive; Test ASTM G21-96 –Determining resistance to Fungi. Result:Nil growth at 4 weeks
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
SLIP RESISTANCE	DIN 51130 R11, V10
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV Light	Resistant to PVC degradation.
WARRANTY	3 years manufactures warranty – Please ask for further details and terms.